

**RWE Renewables UK Dogger Bank  
South (West) Limited**

**RWE Renewables UK Dogger Bank  
South (East) Limited**

**Dogger Bank South Offshore  
Wind Farms**

**Illustrative Underwater Noise Reduction Technical  
Note (Revision 3) (Clean)**

**Document Date: June 2025**

**Document Reference: 14.9**

**Revision Number: 03**

**Classification: Unrestricted**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                           |                              |                            |            |             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------|----------------------------|------------|-------------|
| Company:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | RWE Renewables UK Dogger Bank South (West) Limited and RWE Renewables UK Dogger Bank South (East) Limited | Asset:                       | Development                |            |             |
| Project:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Dogger Bank South Offshore Wind Farms                                                                     | Sub Project/Package          | Consents                   |            |             |
| Document Title or Description:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Illustrative Underwater Noise Reduction Technical Note (Revision 3) (Clean)                               |                              |                            |            |             |
| Document Number:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 005798528-03                                                                                              | Contractor Reference Number: | PC2340-RHD-OF-ZZ-TN-Z-0059 |            |             |
| <p><i>COPYRIGHT © RWE Renewables UK Dogger Bank South (West) Limited and RWE Renewables UK Dogger Bank South (East) Limited, 2025. All rights reserved.</i></p> <p><i>This document is supplied on and subject to the terms and conditions of the Contractual Agreement relating to this work, under which this document has been supplied, in particular:</i></p> <p><b>LIABILITY</b></p> <p><i>In preparation of this document RWE Renewables UK Dogger Bank South (West) Limited and RWE Renewables UK Dogger Bank South (East) Limited has made reasonable efforts to ensure that the content is accurate, up to date and complete for the purpose for which it was contracted. RWE Renewables UK Dogger Bank South (West) Limited and RWE Renewables UK Dogger Bank South (East) Limited makes no warranty as to the accuracy or completeness of material supplied by the client or their agent.</i></p> <p><i>Other than any liability on RWE Renewables UK Dogger Bank South (West) Limited and RWE Renewables UK Dogger Bank South (East) Limited detailed in the contracts between the parties for this work RWE Renewables UK Dogger Bank South (West) Limited and RWE Renewables UK Dogger Bank South (East) Limited shall have no liability for any loss, damage, injury, claim, expense, cost or other consequence arising as a result of use or reliance upon any information contained in or omitted from this document.</i></p> <p><i>Any persons intending to use this document should satisfy themselves as to its applicability for their intended purpose.</i></p> <p><i>The user of this document has the obligation to employ safe working practices for any activities referred to and to adopt specific practices appropriate to local conditions.</i></p> |                                                                                                           |                              |                            |            |             |
| Rev No.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Date                                                                                                      | Status/Reason for Issue      | Author                     | Checked by | Approved by |
| 01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | April 2025                                                                                                | Submission for Deadline 4    | RHDHV / ERM                | RWE        | RWE         |
| 02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | May 2025                                                                                                  | Submission for Deadline 5    | RHDHV / ERM                | RWE        | RWE         |
| 03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | June 2025                                                                                                 | Submission for Deadline 7    | RHDHV                      | RWE        | RWE         |

## Revision Change Log

| Rev No. | Page  | Section    | Description                                                                                                               |
|---------|-------|------------|---------------------------------------------------------------------------------------------------------------------------|
| 01      | N/A   | N/A        | Submission for Deadline 4 in response to                                                                                  |
| 02      | 22-23 | 4.1.1.2    | Amended errors in presented impact ranges.                                                                                |
| 02      | 34    | Appendix A | Added the modelled impact ranges in response to a request from Natural England during a meeting 7 <sup>th</sup> May 2025. |
| 03      | 25-30 | 4.1.1.4    | Added assessment for the Wash and North Norfolk Coast SAC                                                                 |
| 03      | 35-47 | Appendix A | Added the modelled impact ranges for the 135db as requested by Natural England in the Deadline 6 submission [REP6-074]    |

## Contents

|         |                                                                        |    |
|---------|------------------------------------------------------------------------|----|
| 1       | Introduction .....                                                     | 10 |
| 1.1     | Purpose of this Document .....                                         | 10 |
| 1.2     | Underwater Noise Modelling .....                                       | 11 |
| 2       | Noise Reduction Methods .....                                          | 12 |
| 2.1     | Primary Noise Reduction .....                                          | 12 |
| 2.2     | Secondary Noise Reduction .....                                        | 13 |
| 3       | Fish and Shellfish .....                                               | 15 |
| 3.1     | Underwater Noise Impacts of Fish .....                                 | 15 |
| 3.2     | Worst Case Scenario .....                                              | 15 |
| 3.3     | Projects in Isolation and Together .....                               | 16 |
| 3.4     | Summary .....                                                          | 17 |
| 4       | Marine Mammals .....                                                   | 21 |
| 4.1     | Projects in Isolation .....                                            | 21 |
| 4.1.1   | PTS Impact Ranges .....                                                | 21 |
| 4.1.1.1 | PTS from Peak Sound Pressure Levels .....                              | 21 |
| 4.1.1.2 | PTS from Cumulative Exposure .....                                     | 22 |
| 4.1.1.3 | Acoustic Deterrent Device activation times .....                       | 23 |
| 4.1.1.4 | Results of noise reduction on Seal Special Areas of Conservation ..... | 24 |
| 4.2     | Projects Together .....                                                | 31 |
| 4.2.1   | PTS Impact Areas .....                                                 | 31 |
| 4.3     | Summary .....                                                          | 32 |
|         | References .....                                                       | 33 |
|         | Appendix A – Underwater Noise Modelling .....                          | 35 |



## Tables

|                                                                                                                                                                                                                                                                                                                                                     |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Table 2-1 Minimum and maximum noise reduction efficacy from NAS methods                                                                                                                                                                                                                                                                             | 14 |
| Table 3-1 Changes in total area of underwater noise contours between unmitigated and with a 10dB noise reduction simultaneous monopiling at the DBS West north location and the DBS East south location. ....                                                                                                                                       | 20 |
| Table 4-1 Predicted Impact Ranges for PTS SPL <sub>peak</sub> in all Marine Mammal Species, at the Worst Case Modelling Location (DBS East (south location)), from a single strike of the Maximum Hammer Energies of Monopiles for the Projects in isolation (Table 11-21 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11])..... | 22 |
| Table 4-2 The Predicted Impact Ranges for PTS in all Marine Mammal Species, at the Worst Case Modelling Location, for the Cumulative Exposure of Monopiles with and without a 10dB noise reduction at the Projects in isolation (Table 11-23 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11]) .....                             | 23 |
| Table 4-3 ADD Duration, Marine Mammal Swim Speed and Calculated Range for the Cumulative Exposure of a Single Monopile with and without -10dB noise reduction at the DBS East in isolation .....                                                                                                                                                    | 24 |
| Table 4-4 Summary of the Potential Impact Areas for the Concurrent Installation of Monopile Foundations at multiple locations at the Projects, for Marine Mammals using the Impulsive Southall <i>et al.</i> (2019) criteria assuming a fleeing animal. [Table 11-26 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11]].....      | 31 |

## Figures

|                                                                                                                                                                                                                                                                                  |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Figure 3-1 Potential spawning habitat heat map for Atlantic herring in the vicinity of the Dogger Bank South Offshore Winds Farms produced using the approaches from Kyle-Henney <i>et al.</i> (2024). Unmitigated and mitigated (-10dB) underwater noise contours overlaid..... | 18 |
| Figure 3-2 Potential spawning habitat heat map for Atlantic herring in the vicinity of the Dogger Bank South Offshore Winds Farms produced using the approaches from Kyle-Henney <i>et al.</i> (2024). Unmitigated and mitigated (-10dB) underwater noise contours overlaid..... | 19 |

|                                                                                                                                                                                                                                           |    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Figure 4-1 Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS East Array Area .....                                                                                                                                   | 26 |
| Figure 4-2 Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS West Array Area .....                                                                                                                                   | 27 |
| Figure 4-3 Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS West Array Area, with the at sea foraging density of grey seal at the Berwickshire Northumberland and North Coast SAC (Carter <i>et al.</i> 2022) ..... | 28 |
| Figure 4-4 Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS East Array Area, with the at sea foraging density of grey seal at the Humber Estuary SAC (Carter <i>et al.</i> 2022) .....                              | 29 |
| Figure 4-5 Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS East Array Area, with the at sea foraging density of harbour seal at the Wash and North Norfolk Coast SAC (Carter <i>et al.</i> 2022) .....             | 30 |

## Glossary

| Term                                        | Definition                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Array Areas                                 | The DBS East and DBS West offshore Array Areas, where the wind turbines, offshore platforms and array cables would be located. The Array Areas do not include the Offshore Export Cable Corridor or that part of the Inter-Platform Cable Corridor within which no wind turbines are proposed. Each area is referred to separately as an Array Area. |
| Dogger Bank South (DBS) Offshore Wind Farms | The collective name for the two Projects, DBS East and DBS West.                                                                                                                                                                                                                                                                                     |
| In Isolation Scenario                       | A potential construction scenario for one Project which includes either the DBS East or DBS West array, associated offshore and onshore cabling and only the eastern Onshore Converter Station within the Onshore Substation Zone and only the northern route of the onward cable route to the proposed Birkhill Wood National Grid Substation.      |
| Impact                                      | Used to describe a change resulting from an activity via the Projects, i.e. increased suspended sediments / increased noise.                                                                                                                                                                                                                         |
| Marine Mammal Observers (MMOs)              | Trained members of the team who will observe the Monitoring Area.                                                                                                                                                                                                                                                                                    |
| Monitoring Area (MA)                        | The area around each pile location to be monitored in the pre-piling watch, and where possible during any breaks in piling or soft-start by either Marine Mammal Observers (MMOs) or Passive Acoustic Monitoring Operator (PAM-Op).                                                                                                                  |
| Mitigation Zone (MZ)                        | The area around each pile location in which it is predicted physical or permanent auditory injury is possible.                                                                                                                                                                                                                                       |
| Passive Acoustic Monitoring (PAM)           | Use of acoustic sensors to monitor the presence of marine mammals in the Monitoring Area.                                                                                                                                                                                                                                                            |
| The Projects                                | DBS East and DBS West (collectively referred to as the Dogger Bank South Offshore Wind Farms).                                                                                                                                                                                                                                                       |

## Acronyms

| Term  | Definition                                        |
|-------|---------------------------------------------------|
| ADD   | Acoustic Deterrent Device                         |
| AEoI  | Adverse effect on the site integrity              |
| BBC   | Big Bubble Curtains                               |
| BNNC  | Berwickshire Northumberland and North Coast       |
| dB    | Decibel                                           |
| DCO   | Development Consent Order                         |
| DBBC  | Double Big Bubble Curtains                        |
| DBS   | Dogger Bank South                                 |
| Defra | Department for Environment Food and Rural Affairs |
| ES    | Environmental Statement                           |
| HiLo  | High Frequency Low Impact                         |
| HRA   | Habitats Regulation Assessment                    |
| HSD   | Hydro Sound Dampers                               |
| MA    | Monitoring Area                                   |
| MMMP  | Marine Mammal Mitigation Protocol                 |
| MMObs | Marine Mammal Observer                            |
| MMO   | Marine Management Organisation                    |
| MZ    | Mitigation Zone                                   |
| NAS   | Noise Abatement Systems                           |
| OWF   | Offshore Wind Farm                                |
| PAM   | Passive Acoustic Monitoring                       |
| PTS   | Permanent Threshold Shift                         |

| Term                | Definition                              |
|---------------------|-----------------------------------------|
| RIAA                | Report to Inform Appropriate Assessment |
| SAC                 | Special Area of Conservation            |
| SEL                 | Sound Exposure Level                    |
| SEL <sub>cum</sub>  | Cumulative Sound Exposure Level         |
| SPL <sub>peak</sub> | Peak Sound Pressure Level               |
| TTS                 | Temporary Threshold Shift               |

# 1 Introduction

1. The Department for Environment Food and Rural Affairs (Defra) Policy Paper on Reducing Marine Noise was published on 21<sup>st</sup> January 2025 as part of Defra's Marine Noise Package. In line with this policy the Projects will utilise best endeavours to deliver noise reductions, where applicable, through the use of primary and / or secondary noise reduction based on the final project design.
2. For this reason, and as requested by the Marine Management Organisation (MMO) and Natural England, additional underwater noise modelling has been undertaken to illustrate the benefits achievable through a noise reduction of 10 decibel (dB). Such a reduction could be achieved by reducing hammer energies below those presented as worst case in the Rochdale envelope and / or through utilising other primary and / or secondary methods. Further information on potential noise reduction methods is available in section 2.
3. For clarity, the Applicants will not be committing to any specific secondary noise reduction methods until the final design parameters, including all relevant primary measures, are finalised post consent. Hence, this technical note is provided for illustrative purposes only. The final Marine Mammal Mitigation Protocol (MMMP) incorporating the final design information and all primary and any secondary measures will be agreed through consultation with the relevant Statutory Nature Conservation Body and signed off by the MMO.

## 1.1 Purpose of this Document

4. The purpose of this Underwater Noise Reduction Technical Note is to provide a purely illustrative demonstration of the potential reduction in impact ranges if primary and /or secondary measures implemented at Dogger Bank South (DBS) Offshore Wind Farms ('the Projects') are utilised which resulted in a 10dB reduction in sound levels. Any secondary measures implemented would be incorporated through the final MMMP to be submitted for approval as required under the Draft Development Consent Order (DCO) for the proposed Projects.
5. The Defra marine noise policy (2025) defines that: 'Primary methods aim to reduce noise emissions at the source through modifications of the piling process (for example, alternative hammer types, alternative foundation types). Secondary methods aim to reduce the noise propagated through the water column during pile driving by employing systems such as casings, resonators and bubble curtains'.
6. The JNCC *et al.* (2025) position paper classifies mitigation measures into one of three key types:
  1. Primary mitigation: these are measures which form an inherent part of the project design.

2. Secondary mitigation: typically for construction-related impacts, these measures require further activity to achieve the anticipated outcome.
3. Tertiary mitigation: these measures are required regardless of any EIA assessment, as they are imposed, for example, because of legislative requirements and/or standard sectoral practices.
7. This technical note presents the predicted impact ranges from the underwater noise modelling using a 10dB sound reduction for fish and shellfish (section 1) and marine mammals (section 4) for piling at the Projects' Array Areas if constructed in isolation or together.

## 1.2 Underwater Noise Modelling

8. Underwater noise modelling was undertaken by Subacoustech Environmental Ltd to estimate the noise levels likely to arise during noisy activities, in particular during impact pile driving (**Appendix 11-3 Underwater Noise Modelling Report (Revision 2)** [AS-137]) to determine the potential effects on marine mammals and fish.
9. Underwater noise modelling was undertaken against the currently recommended marine mammal injury thresholds presented in Southall *et al.* (2019). In relation to fish, the publication of Popper *et al.* (2014) was used to determine the thresholds for fish exposure to sound. Consideration has also been given to behavioural thresholds presented in Hawkins *et al.* (2014) on request from the MMO. It should be noted that that, in line with the views of the authors of the paper in question, the Applicants do not consider this threshold to be appropriate for impact assessment as stated within **The Applicants Response to Deadline 2 – Appendix B** [REP3-028].
10. As stated in section 11.6.1.1.1 of **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11] and section 10.6.1.3.5. of **Chapter 10 – Fish and Shellfish Ecology (Revision 2)** [document reference 7.10] the worst case locations for piling representing the maximum spatial extent were used for the impact assessment, these are;
  - DBS East – south location; and
  - DBS West – west location.
11. Further context relating to worst case scenarios used for Fish and Shellfish Ecology is presented within section 1.
12. Additional underwater noise modelling was undertaken to investigate the effects of impact piling noise at the Projects in conjunction with noise reduction. The exact mitigation to be used has not been confirmed, but a flat broadband 10dB noise reduction has been applied at source (based on generic data for a bubble curtain from Verfuss *et al.* 2019) for the monopile scenario at the two modelling locations used in the environmental statement. All other parameters used to generate the modelling outputs presented in this report remain identical to those discussed in section 5.2 of **Appendix 11-3 Underwater Noise Modelling Report (Revision 2)** [AS-137].

## 2 Noise Reduction Methods

13. An area of concern during the consenting of fixed foundation based offshore wind farms (OWF) is the emission of anthropogenic noise emitted through impact pile driving, which is used to install both turbine and offshore substation foundations. Metrics which could affect noise generation for impact pile driving activities include pile characteristics (pile type and diameter), hammer energy, environmental variables (bathymetry and sediment type), as well as spatial and temporal attributes such as the animal's distance from the pile and time since the first pile strike, respectively. A precautionary design envelope without mitigation has been presented in the Environmental Statement (ES) using the maximum hammer energy, duration of impact piling, pile diameter and number of turbines to form the worst case scenario for the Projects.
14. Noise reduction methods are used in the European sector of the North Sea as a standard requirement during offshore construction. Through the Defra underwater noise policy (Defra, 2025), it is expected that all offshore wind pile driving activity across all English waters will be required to demonstrate best endeavours to deliver noise reductions through the use of primary and / or secondary noise reduction methods in the first instance. Noise reduction measures rely on the use of primary and / or secondary noise mitigation (Bellmann *et al.* 2018).
15. These measures are aimed at:
  - Ensuring that no marine mammal is present within the potential impact zone around the piling position (by conducting marine mammal monitoring and / or using acoustic deterrent devices (ADD)); or
  - Protecting marine mammals during sensitive times and / or in sensitive habitats; or
  - Reducing impacts to fish species sensitive to underwater noise, specifically within potential spawning grounds during the spawning period (JNCC *et al.* 2025); or
  - Restricting the amount of noise energy emitted into the sea and reducing disturbance, for example, noise reduction measures have been required to meet specific noise thresholds (e.g., in Germany and are proposed for the UK by 2028).

### 2.1 Primary Noise Reduction

16. Primary noise reduction methods aim to decrease noise emissions at source. This can be achieved through modifications to the project design (e.g. pile design and type) and / or the impact piling process through adjusting the piling energy by reducing the maximum hammer energy and / or adjusting the strike rate (including soft start and ramp up procedure), or by the use of alternative installation technologies (e.g. vibro piling, blue piling, High frequency low-impact (HiLo) piling and drilling).



17. Hammer energy is only one of several factors that influence the sound levels generated from pile driving. Higher strike energy generally contributes to increased sound levels and cumulative sound exposure. Findings by Martin and Barcelay (2019) and Robinson *et al.* (2007) indicate that change in the strike energy increased the predicted sound levels, for instance a ramp up of pile driving energy from 80 to 800 kJ over 800 strikes increased the Sound Exposure Level (SEL) by 8dB.
18. For the Morecambe OWF project, it was also demonstrated that strike rates affect the sound levels. In the Morecambe OWF ES two different piling scenarios were presented, assessing both a lower and a higher strike rate. Both scenarios used the same pile diameter dimensions (Monopile = 12m; Pinpile = 3m) and the maximum blow energies (Monopile = 6,600kJ; Pinpile = 2,500kJ). Since a piling hammer is capable of more rapid strikes at lower blow energies, the 'high strike rate' scenario included a slower soft-start (i.e. 30 minutes at 550kJ with 0.5 to 100 blows per minute), and a greater total number of pile strikes over a shorter duration, resulting in faster strike rates. For example, in the 'higher strike rate' scenario, where the hammer energy ranged between 21% and 62% of its maximum, the strike rates ranged between 86 and 58 blows per minute (see Tables 4-45 and 4-46 in Section 4.4 of the UWN modelling report for the Morecambe Offshore Windfarm, 2025). In contrast, the 'lower strike rate' scenario assumed a consistent rate of 15 blows per minute between 32% and 80% of the maximum hammer energy (see Tables 3-2 and 3-3 in Section 3.2 in the UWN modelling report for the Morecambe Offshore Windfarm, 2025).
19. At their worst-case modelling location, the impact ranges between these two strike rates showed significant differences in the maximum PTS effect ranges (for weighted SEL<sub>cum</sub> for a monopile). Specifically, the effect ranges increased from 2.5km with the 'lower strike rate' to 13km with the 'higher strike rate' for minke whale and from 1.5km with the 'lower strike rate' to 8.1km with the 'higher strike rate' for harbour porpoise.
20. Whilst modifications to the soft start and ramp up can reduce impact range for marine mammals, it is important to note that this noise reduction measure would not reduce the impacts to fish because they are not assessed as having a fleeing response.

## 2.2 Secondary Noise Reduction

21. Secondary noise reduction methods aim to reduce sound propagation during pile driving. This can be achieved by the use of Noise Abatement Systems (NAS) such as casings, resonators or bubble curtains (big and small bubble curtains). The area of noise exposure to fish and marine mammals can be significantly decreased by using secondary noise reduction measures (Koschinski and Lüdemann, 2020). Several parameters influence the resulting noise levels such as pile diameter, water depth, soil structure and blow energy (Verfuss *et al.* 2019).
22. **Table 2-1** presents examples of NAS along with the noise reduction in SEL (dB) that they could achieve. This shows that the majority of NAS would be expected to achieve a 10dB reduction or greater.

Table 2-1 Minimum and maximum noise reduction efficacy from NAS methods

| NAS                                   | Noise reduction (SEL) | Source                                                  |
|---------------------------------------|-----------------------|---------------------------------------------------------|
| <b>Bubble curtains</b>                |                       |                                                         |
| Big Bubble Curtains (BBC)             | 7 – 15dB              | Verfuss <i>et al.</i> 2019; Bellmann <i>et al.</i> 2020 |
|                                       | 15dB                  | Bellman <i>et al.</i> 2018                              |
| Double BBC (DBBC)                     | 8 – 18 dB             | Bellmann <i>et al.</i> 2020                             |
| <b>Hydro sound Dampers (HSD)</b>      |                       |                                                         |
| HSD                                   | 10 – 12 dB            | Bellmann <i>et al.</i> 2020                             |
|                                       | 10-30 dB              | Elmer 2018                                              |
|                                       | 20 dB                 | Bruns <i>et al.</i> 2014                                |
| Off Noise-Solutions GmbH provides HSD | 11 – 14 dB at 750 m   | Bellmann <i>et al.</i> 2020                             |
| <b>Pile casing systems</b>            |                       |                                                         |
| IHC IQIP NMS                          | 13 – 16dB             | Bellmann <i>et al.</i> 2020                             |
| The IHC-NMS8000                       | 15 – 17 dB            | Bellmann <i>et al.</i> 2020                             |

## 3 Fish and Shellfish

### 3.1 Underwater Noise Impacts of Fish

23. Impacts on Fish and Shellfish receptors are assessed based on receptor groups as defined within Popper *et al.* (2014) and comprise:
- Fish with a swim bladder used in hearing;
  - Fish with a swim bladder not used in hearing;
  - Fish without a swim bladder; and
  - Fish eggs and larvae.
24. The above receptor groups are listed in order of decreasing sensitivity to underwater noise. Species with a swim bladder that is used in hearing represent those species most sensitive to underwater noise impacts, and include clupeids such as Atlantic herring and shad, and gadids (e.g. Atlantic cod). This receptor group is used to determine the worst case scenario assessment for underwater noise impacts. As herring spawning grounds are known to exist within and close to the Dogger Bank, and herring fall within this receptor group, impacts to this species have been used to determine the worst case for impacts on Fish and Shellfish Ecology as a result of underwater noise throughout this application.

### 3.2 Worst Case Scenario

25. Within the original assessment, separate scenarios were presented for the Projects in isolation and together as described within section 10.6.1.3.5. of **Chapter 10 Fish and Shellfish Ecology (Revision 2)** [document reference 7.10]. These scenarios aimed to maximise spatial extent of underwater noise impacts to ensure the assessment of a worst case scenario applicable to all receptor groups.
26. The together scenario was represented by three simultaneous pin piles at DBS East, DBS West, and at the Offshore Export Cable Corridor Electrical Switching Platform (ESP). This scenario maximised both spatial extent, and temporal extent due to the increased piling time required for the installation of pin piles.
27. For the In Isolation Scenario two simultaneous monopile installations were considered within the Array Areas, with no simultaneous piling to occur at the ESP. In this scenario a precautionary approach to modelling was used to simplify assessment clarity whilst ensuring a worst case assessment was undertaken. Separation between the two piling locations within the Array Areas (the north most location at DBS West, and the south most location at DBS East) was used, rather than using two piling locations within a single Array Area as would be realistic in the In Isolation Scenario. This precautionary approach over-estimated the spatial extent of underwater noise in the In Isolation Scenario, but improved the clarity of the assessment.


28. Following revisions to project design presented within **Project Change Request 1 – Offshore and Intertidal Works** [AS-141] and **Appendix A: Fish and Shellfish Environmental Assessment Update** [AS-142] the potential for piling at the ESP was removed from assessment. In terms of temporal impacts, simultaneous pin piling at two locations remains the worst case scenario for the together assessment (maximising temporal extent). However, in terms of spatial impact, which remains the key consideration when determining potential impacts on Atlantic herring in this Technical Note, simultaneous monopiling at the same two locations that were used in the original assessment remained the worst case scenario for the In Isolation Scenario (maximising spatial extent). For the purposes of this Technical Note, therefore, the In Isolation Scenario is the same as the worst case together scenario.

### 3.3 Projects in Isolation and Together

29. Impacts associated with monopiling at the DBS West north location, and the DBS East south location both with and without a 10dB reduction are presented within **Figure 3-1**. The same information cropped to the Array Areas is presented within **Figure 3-2**. These figures present the noise impacts in relation to potential herring spawning habitat. As indicated within these figures, a reduction of 10dB results in a large decrease in total area associated with each of the underwater noise impact ranges (dotted lines indicating unmitigated noise contours, solid lines indicating mitigated noise contours) and therefore decreases in overlap of underwater noise impacts with potential herring spawning habitat.
30. Note that the Kyle-Henney *et al.* (2024) methodology does not prescribe set cut off points for the classification of potential habitat suitability. Rather, habitat is assigned a value between 0 and 1, with smaller values indicating greater spawning habitat potential. For clarity, changes in the overlap of underwater noise impacts with potential herring spawning habitat are presented within **Table 3-1**, with nominal grouping included for legibility. Values <0.1 may be considered as moderate and higher, values from 0.1-1 may be considered moderate to lower.
31. Examination of the modelling indicates that with a 10dB reduction, underwater noise impacts within each of the impact ranges defined in Popper *et al.* (2014) for fish with a swim bladder used in hearing (186dB SEL<sub>cum</sub> for temporary threshold shift; 203 dB SEL<sub>cum</sub> for recoverable injury; and 207 dB SEL<sub>cum</sub> for mortality or potential mortal injury) are limited to regions either unsuitable for herring spawning, or regions with a spawning potential >0.25.
32. Within the 135 dB SEL<sub>ss</sub> contours, areas of herring spawning potential of a value <0.05- <0.1, and 0.05 (moderate to higher potential) are reduced by 80.91% and 100% respectively. Whilst it is maintained that the 135dB SEL<sub>ss</sub> threshold is not considered appropriate for the determination of population level impacts, it is noted that the impact range of this contour is greatly reduced via the introduction of noise reduction methods.

### 3.4 Summary

33. The modelling presented within the ES is based on a precautionary design envelope and without mitigation as a worst case. It is likely that the DBS Projects would be developed with a less impactful envelope than that presented in the ES and that noise mitigation would be provided that would deliver substantial reductions of impact ranges, benefitting fish species.
34. The information presented in **Figure 3-1** and **Figure 3-2** clearly shows the reductions in impact ranges that could be achieved if a 10dB reduction of noise impacts was realised through such means. The Projects will utilise best endeavours to deliver noise reductions, where applicable, through the use of primary and/or secondary methods based on the final project design. By utilising underwater noise reduction methods that lead to a 10dB reduction in piling noise, impacts relating to underwater noise would cover a reduced area of potential herring spawning grounds. Indeed, under such a scenario, if a 10dB reduction could be achieved the temporary threshold shift boundary would move entirely outside of regions of potential herring spawning with a value of <0.25 as shown in **Figure 3-1**.
35. The final noise impacts will be remodelled post-consent as part of the development of the MMMP. This remodelling will demonstrate the final reductions of noise impact ranges achieved through any changes to project design and through the application of primary and/or secondary noise mitigation. The Applicants consider that, on the basis of the information presented in section 2, a 10dB reduction could be achieved through the adoption of a number of different potential options and that the benefits of such a reduction would remove the risk of noise impacts to herring utilising the main Banks herring population spawning ground during their spawning season (August to October).

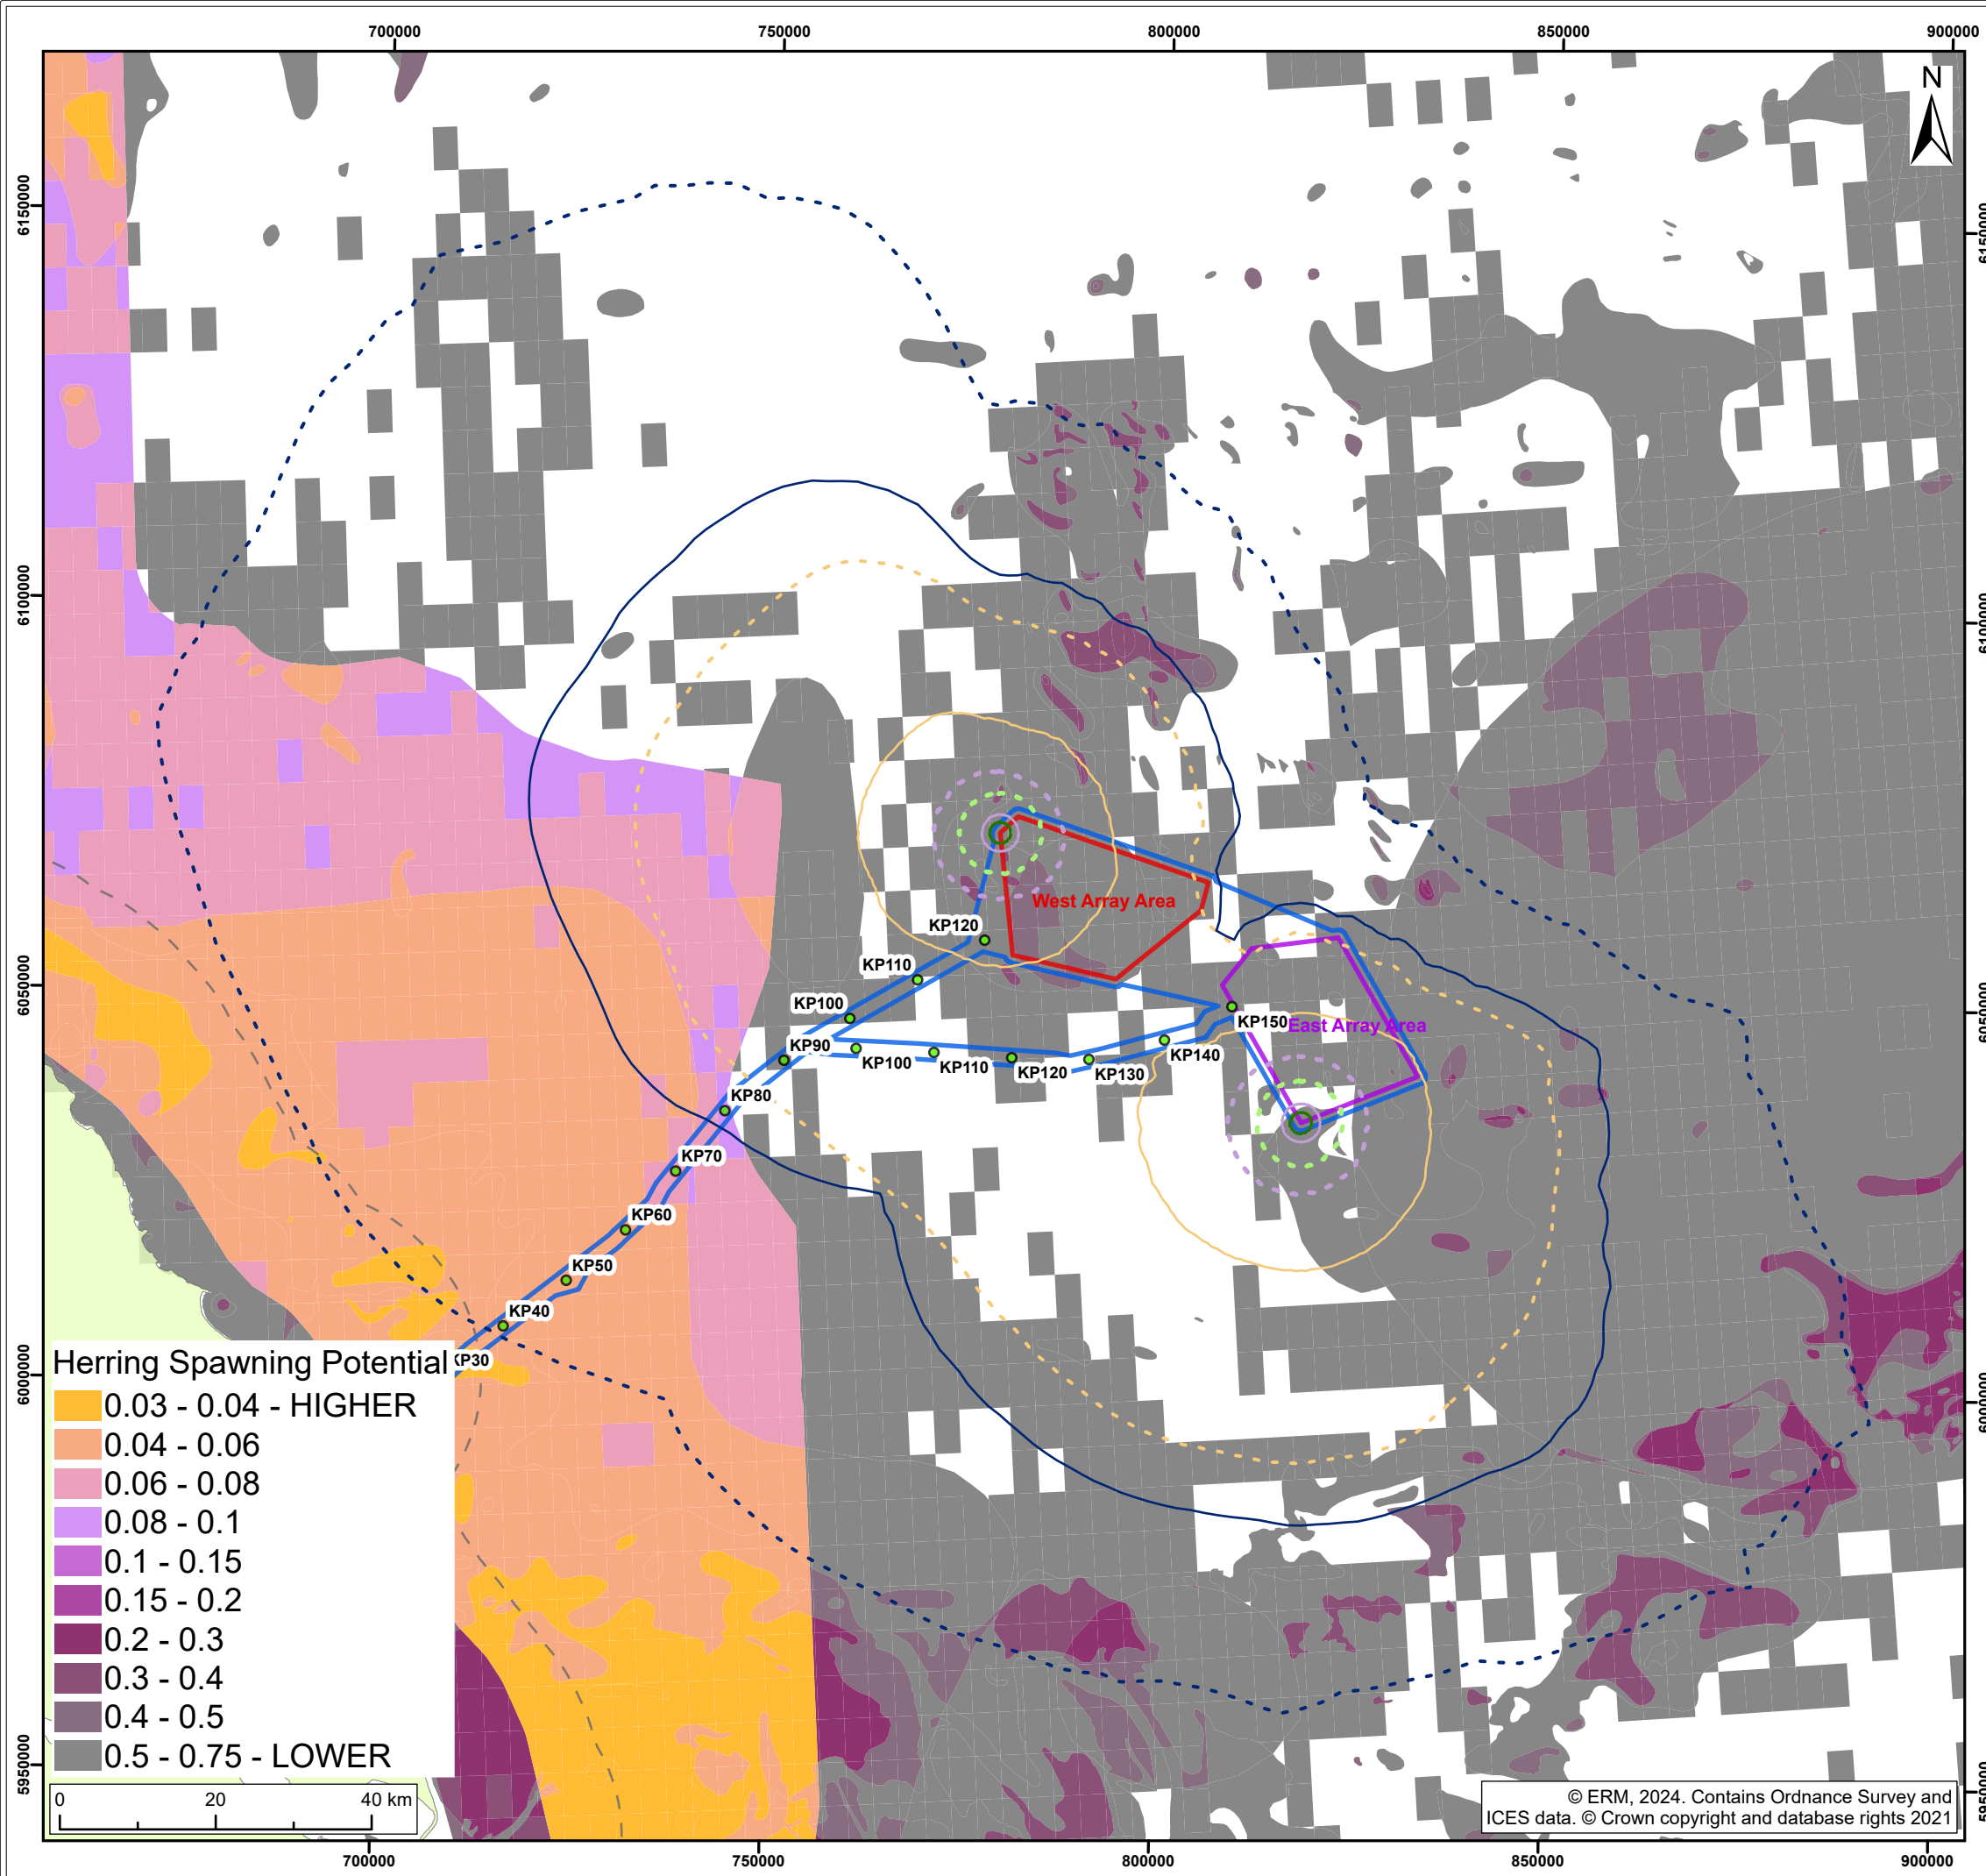


**Legend:**

- UK 12 nm limit
- Array Area**
  - KP Points
  - DBS East Array Area
  - DBS West Array Area
  - Offshore Development Area
- Mitigated Thresholds (10 dB Reduction) Disturbance Threshold (Based on Hawkins et al. 2014)**
  - 135 dB re 1  $\mu\text{Pa}^2\text{SEL}_{ss}$  -10dB (Behaviour Threshold)
- Key UWN Thresholds (Popper et al. 2014)**
  - 186 dB re 1  $\mu\text{Pa}^2\text{SEL}_{cum}$  -10dB (TTS)
  - 203 dB re 1  $\mu\text{Pa}^2\text{SEL}_{cum}$  -10dB (Recoverable Injury)
  - 207 dB re 1  $\mu\text{Pa}^2\text{SEL}_{cum}$  -10dB (Mortality/Potential Mortal Injury)
- Unmitigated Thresholds Disturbance Threshold (based on Hawkins et al., 2014)**
  - 135 dB re 1  $\mu\text{Pa}^2\text{SEL}_{ss}$  (Behaviour Threshold)
- Key UWN Thresholds (Popper et al., 2014)**
  - 186 dB re 1  $\mu\text{Pa}^2\text{SEL}_{cum}$  (TTS)
  - 203 dB re 1  $\mu\text{Pa}^2\text{SEL}_{cum}$  (Recoverable Injury)
  - 207 dB re 1  $\mu\text{Pa}^2\text{SEL}_{cum}$  (Mortality/Potential Mortal Injury)

|                                                                                                                                                                                                                                                                    |     |                                                |                                                                 |                  |     |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------------------------------------------------|-----------------------------------------------------------------|------------------|-----|-----|
|                                                                                                                                                                                                                                                                    |     |                                                |                                                                 |                  |     |     |
|                                                                                                                                                                                                                                                                    |     |                                                |                                                                 |                  |     |     |
| S1                                                                                                                                                                                                                                                                 | P01 | 4/15/2025                                      | J0754512-MAP-111-NoiseAbatement-01                              | MW               | OW  |     |
| SUI                                                                                                                                                                                                                                                                | REV | DATE                                           | DESCRIPTION                                                     | DRW              | CHK | APR |
| Title: Potential spawning habitat heat map for Atlantic herring in the vicinity of the Dogger Bank South Offshore Winds Farms. Produced using the approaches from Kyle-Henney et al. (2024). Unmitigated and mitigated (-10dB) underwater noise contours overlaid. |     |                                                |                                                                 |                  |     |     |
| Figure: 3-1                                                                                                                                                                                                                                                        |     | Drawing No: J0754512-MAP-111-NoiseAbatement-01 |                                                                 |                  |     |     |
| Co-ordinate system: WGS 1984 UTM Zone 30N                                                                                                                                                                                                                          |     |                                                | Page Size: A3                                                   | Scale: 1:850,000 |     |     |
| Project: Dogger Bank South Offshore Wind Farms                                                                                                                                                                                                                     |     |                                                | Report: The Applicants' Responses to Deadline 2 Documents - MMO |                  |     |     |
| <div> </div>                                                                                                                                                                                                                                                       |     |                                                |                                                                 |                  |     |     |



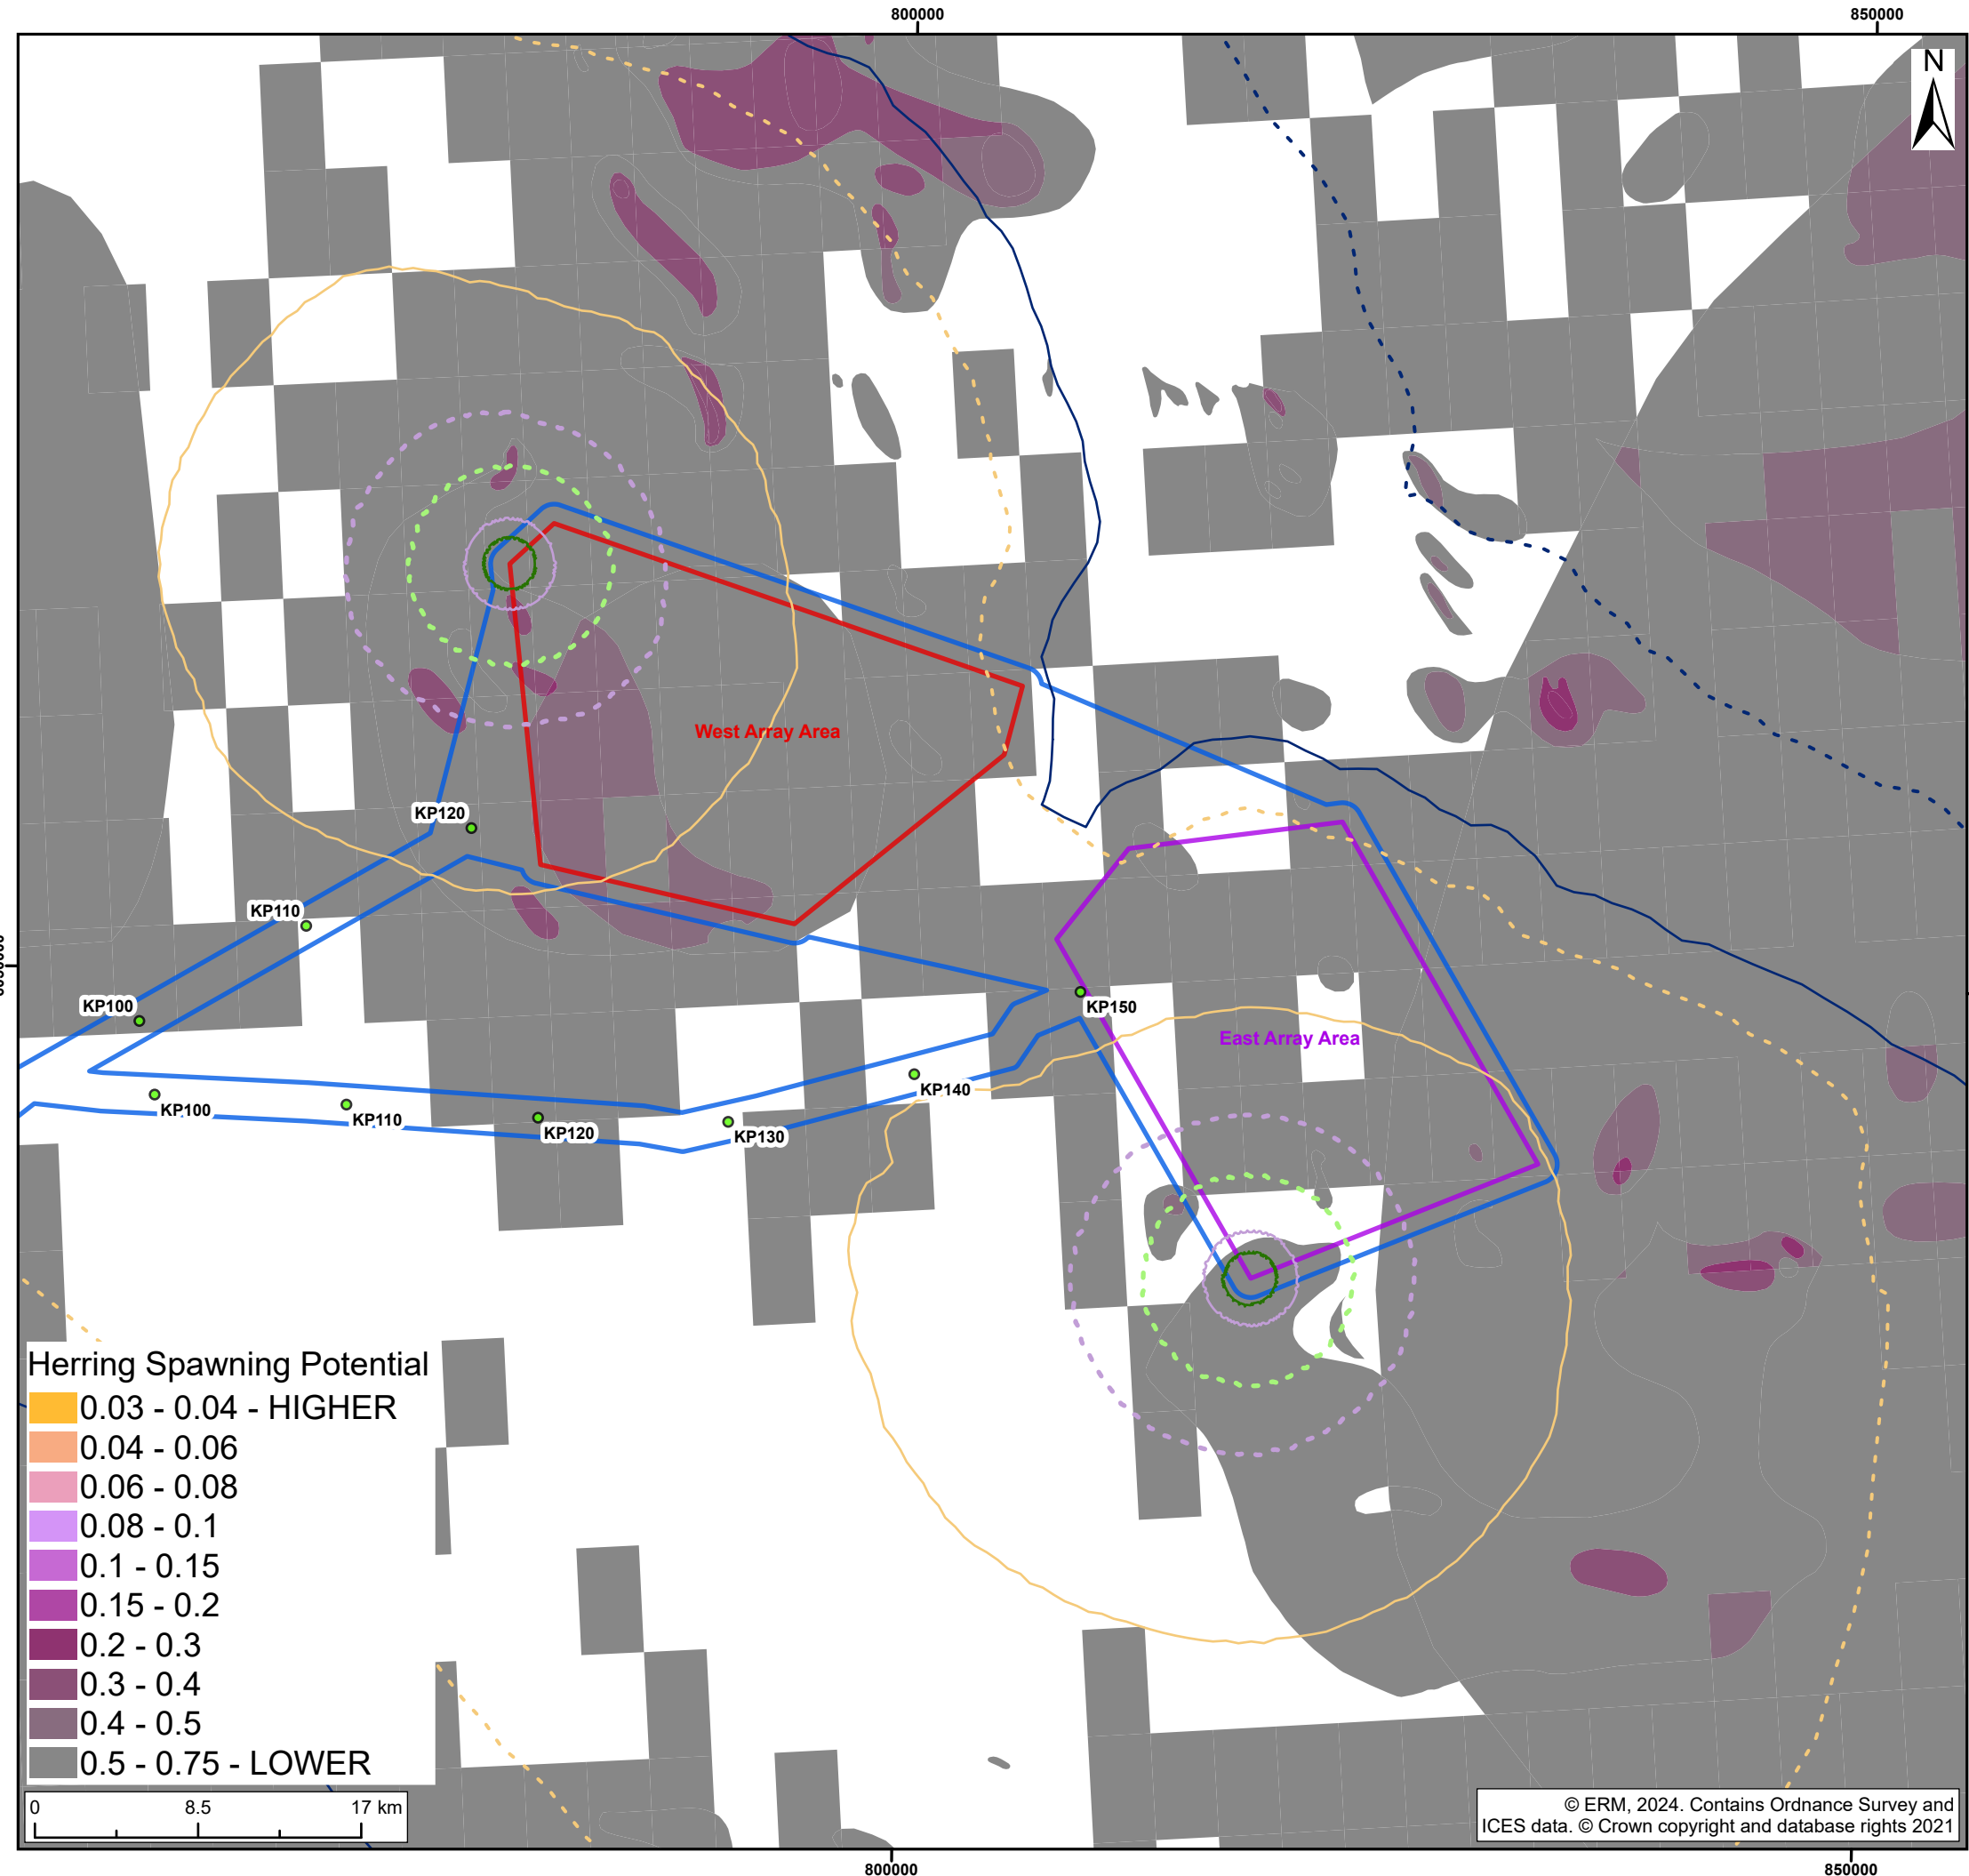

**Legend:**

- UK 12 nm limit
- Array Area
- KP Points
- DBS East Array Area
- DBS West Array Area
- Offshore Development Area
- Mitigated Thresholds (10 dB Reduction) Disturbance Threshold (Based on Hawkins et al. 2014)
- 135 dB re 1  $\mu\text{Pa}^2\text{SEL}_{ss}$  -10dB (Behaviour Threshold)
- Key UWN Thresholds (Popper et al. 2014)
- 186 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{cum}$  -10dB (TTS)
- 203 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{cum}$  -10dB (Recoverable Injury)
- 207 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{cum}$  -10dB (Mortality/Potential Mortal Injury)
- Unmitigated Thresholds Disturbance Threshold (based on Hawkins et al., 2014)
- 135 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{ss}$  (Behaviour Threshold)
- Key UWN Thresholds (Popper et al. 2014)
- 186 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{cum}$  (TTS)
- 203 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{cum}$  (Recoverable Injury)
- 207 dB re 1  $\mu\text{Pa}^2\text{s SEL}_{cum}$  (Mortality/Potential Mortal Injury)

|     |     |           |                                    |     |     |     |
|-----|-----|-----------|------------------------------------|-----|-----|-----|
| S1  | P01 | 4/15/2025 | J0754512-MAP-111-NoiseAbatement-01 | MW  | OW  |     |
| SUI | REV | DATE      | DESCRIPTION                        | DRW | CHK | APR |

Title: Potential spawning habitat heat map for Atlantic herring in the vicinity of the Dogger Bank South Offshore Winds Farms. Produced using the approaches from Kyle-Henney et al. (2024). Unmitigated and mitigated (-10dB) underwater noise contours overlaid.

Figure: 3-2 Drawing No: J0754512-MAP-111-NoiseAbatement-01

Co-ordinate system: WGS 1984 UTM Zone 30N Page Size: A3 Scale: 1:350,000

Project: Dogger Bank South Offshore Wind Farms Report: The Applicants' Responses to Deadline 2 Documents - MMO

AN ERM GROUP COMPANY

Table 3-1 Changes in total area of underwater noise contours between unmitigated and with a 10dB noise reduction simultaneous monopiling at the DBS West north location and the DBS East south location.

| Noise Contour (dB re 1µPa²s) | Herring Spawning Potential | Total Area Unmitigated (km²) | Total Area with -10 dB noise reduction (km²) | % Reduction from Unmitigated to 10 dB noise reduction |
|------------------------------|----------------------------|------------------------------|----------------------------------------------|-------------------------------------------------------|
| 135 SEL <sub>ss</sub>        | <0.05                      | 466.36                       | 0.00                                         | 100.00                                                |
|                              | 0.05-<0.1                  | 4366.37                      | 833.37                                       | 80.91                                                 |
|                              | 0.1-<0.25                  | 315.44                       | 238.10                                       | 24.52                                                 |
|                              | >0.25                      | 8487.29                      | 4972.74                                      | 41.41                                                 |
| 186 SEL <sub>cum</sub>       | <0.05                      | 0.00                         | 0.00                                         | -                                                     |
|                              | 0.05-<0.1                  | 392.90                       | 0.00                                         | 100.00                                                |
|                              | 0.1-<0.25                  | 113.80                       | 0.00                                         | 100.00                                                |
|                              | >0.25                      | 4217.71                      | 1226.63                                      | 70.92                                                 |
| 203 SEL <sub>cum</sub>       | <0.05                      | 0.00                         | 0.00                                         | -                                                     |
|                              | 0.05-<0.1                  | 0.00                         | 0.00                                         | -                                                     |
|                              | 0.1-<0.25                  | 0.00                         | 0.00                                         | -                                                     |
|                              | >0.25                      | 239.79                       | 22.44                                        | 90.64                                                 |
| 207 SEL <sub>cum</sub>       | <0.05                      | 0.00                         | 0.00                                         | -                                                     |
|                              | 0.05-<0.1                  | 0.00                         | 0.00                                         | -                                                     |
|                              | 0.1-<0.25                  | 0.00                         | 0.00                                         | -                                                     |
|                              | >0.25                      | 143.05                       | 11.58                                        | 91.90                                                 |



## 4 Marine Mammals

### 4.1 Projects in Isolation

36. Permanent Threshold Shift (PTS) can occur instantaneously from acute exposure to high noise levels, such as single strike Sound Pressure Level ( $SPL_{peak}$ ) of the maximum hammer energy applied during piling. PTS can also occur as a result of prolonged exposure to increased noise levels, such as for the duration of pile installation (cumulative Sound Exposure Level ( $SEL_{cum}$ )).
37. For the Projects constructed in isolation, the assessment for potential PTS was presented in section 11.6.1.1.2.1 of **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11] without mitigation to represent the worst case scenario for piling. This technical note presents the predicted impact ranges based on a 10dB reduction in noise levels in comparison with the predicted impact ranges presented in **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11].

#### 4.1.1 PTS Impact Ranges

38. The impact ranges presented in Table 11-21 of **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11] are the Projects' absolute worst case. However, with the new Defra noise policy in place and with the Applicants committing to utilise best endeavours to deliver primary and / or secondary noise reduction methods, this technical note presents predicted impact ranges that could be achieved using noise reduction methods. Maximum marine mammal PTS impact ranges with and without a 10dB noise reduction are presented in **Table 4-1** and **Table 4-2**.

##### 4.1.1.1 PTS from Peak Sound Pressure Levels

39. Peak Sound Pressure Level ( $SPL_{peak}$ ) are often used to characterise sound transients from impulsive sources, such as percussive impact piling. A peak SPL is calculated using the maximum variation of the pressure, from positive to zero, within the wave. This represents the maximum change in positive pressure (differential pressure from positive to zero) as the transient pressure wave propagates.
40. **Table 4-1** presents the predicted impact ranges using  $SPL_{peak}$  for a single strike at the maximum hammer energy in the current design envelope of 6,000 kJ for a monopile installation. The predicted impact range for harbour porpoise would decrease from 740m in Table 11-21 of **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11] without any mitigation to 150m using a 10dB noise reduction.
41. Based on the reduction to a 150m predicted impact range for a single strike at maximum energy for harbour porpoise, the monitoring area (MA) would be reduced to 500m in line with the JNCC (2010) guidance where marine mammal observers (MMObs) and Passive acoustic monitoring (PAM) will be effective at monitoring the full MA.

Table 4-1 Predicted Impact Ranges for PTS  $SPL_{peak}$  in all Marine Mammal Species, at the Worst Case Modelling Location (DBS East (south location)), from a single strike of the Maximum Hammer Energies of Monopiles for the Projects in isolation (Table 11-21 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11])

| Marine mammal species | Location | Potential impact ranges for PTS from a single strike at maximum hammer energy |                             |
|-----------------------|----------|-------------------------------------------------------------------------------|-----------------------------|
|                       |          | Unmitigated presented in the ES                                               | With -10 dB noise reduction |
| Harbour porpoise      | DBS East | 740m                                                                          | 150m                        |
| Dolphin species       | DBS East | 50m                                                                           | <50m                        |
| Minke whale           | DBS East | 130m                                                                          | <50m                        |
| Seal species          | DBS East | 60m                                                                           | <50m                        |

#### 4.1.1.2 PTS from Cumulative Exposure

42. Cumulative Sound Exposure Level ( $SEL_{cum}$ ) is the cumulative sound exposure level throughout the duration of piling, including soft-start, ramp-up and time required to complete the installation of the foundation. To determine  $SEL_{cum}$  ranges for marine mammals, a fleeing animal model has been used. This assumes that the animal exposed to high noise levels would swim away from the noise source. For this, a constant swimming speed of 3.25m/s has been assumed for minke whale (Blix and Folkow, 1995), and as a precautionary approach for all other species, a constant swimming speed of 1.5m/s has been used, based on the average swimming speed for harbour porpoise mother and calf pairs (Otani *et al.*, 2000). This is considered a worst case scenario, as marine mammals are expected to be able to swim faster.
43. The maximum predicted impact range for PTS from cumulative exposure ( $SEL_{cum}$ ) during a monopile installation with maximum hammer energy was up to 11km for harbour porpoise and 18km for minke whale as presented in Table 11-23 of **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11] for two sequential monopiles installed with a maximum hammer energy of 6,000kJ. The impact ranges are decreased from 18km to 1.6km for minke whale (**Table 4-2**) and from 11km to 980m for harbour porpoise with a 10dB reduction at source (**Table 4-2**).

Table 4-2 The Predicted Impact Ranges for PTS in all Marine Mammal Species, at the Worst Case Modelling Location, for the Cumulative Exposure of Monopiles with and without a 10dB noise reduction at the Projects in isolation (Table 11-23 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11])

| Marine mammal species                                                | Location             | Potential impact ranges (and areas) for PTS due to cumulative exposure |                             |
|----------------------------------------------------------------------|----------------------|------------------------------------------------------------------------|-----------------------------|
| Cumulative exposure from two sequential monopiles in the Array Areas |                      |                                                                        |                             |
|                                                                      |                      | Unmitigated presented in the ES                                        | With -10 dB noise reduction |
| Harbour porpoise                                                     | DBS East             | 10km (240km²)                                                          | 0.98km (2.4km²)             |
|                                                                      | DBS West             | 9.0km (200km²)                                                         | 0.83km (1.8km²)             |
| Dolphin species                                                      | DBS East or DBS West | 0.1km (0.0km²)                                                         | <0. 1km (0.1km²)            |
| Minke whale                                                          | DBS East             | 18km (560km²)                                                          | 1.6km (4.6km²)              |
|                                                                      | DBS West             | 16km (460km²)                                                          | 1.1km (2.5km²)              |
| Seal species                                                         | DBS East             | 1.6km (6.2km²)                                                         | <0. 1km (0.1km²)            |
|                                                                      | DBS West             | 1.3km (4.3km²)                                                         | <0. 1km (0.1km²)            |

#### 4.1.1.3 Acoustic Deterrent Device activation times

44. **Table 4-3** provides a summary of the ADD activation durations required to allow animals to flee from the modelled piling PTS SEL<sub>cum</sub> impact ranges.
45. The predicted PTS SEL<sub>cum</sub> impact ranges in **Table 4-3** are for a single monopile installation at DBS East as the impact ranges are slightly larger compared to the predicted impact ranges at DBS West and therefore represent the worst case. This can be due to differences that occur with the temperature, salinity, and depth of the water, as well as the sediment type at the modelling locations.
46. The maximum activation time recommended through consultation with regulators and assessed in the ES, is 80 minutes (as presented in Table 11-50 in section 11.6.1.2.2.5 of **Chapter 11 Marine Mammals (Revision 2)** [document reference 7.11]), as ADDs are deemed effective range up to a of 7km, which is approximately 80 minutes of usage based on the harbour porpoise swim speed of 1.5 m/s. **Table 4-3** presents the impact ranges and potential ADD usage based on the PTS SEL<sub>cum</sub> from a single monopile at DBS East.
47. During unmitigated piling, a minimum 112 minute ADD activation would be required to deter harbour porpoise from the mitigation zone (MZ) prior to monopile installation (**Table 4-3**). This activation time would also be sufficient to cover the impact ranges for minke whale, dolphins and seals.

48. With the decrease in impact ranges due to the 10dB noise reduction (**Table 4-2**), the ADD activation time is greatly reduced (**Table 4-3**). For a single monopile installation at DBS East, the ADD would need to be activated for a minimum of 25 minutes for minke whale to move outside of the MZ, which is also sufficient to cover the deterrent ranges required for harbour porpoise, dolphins and seals which would only need 12 minutes of ADD use.

**Table 4-3 ADD Duration, Marine Mammal Swim Speed and Calculated Range for the Cumulative Exposure of a Single Monopile with and without -10dB noise reduction at the DBS East in isolation**

| Species                              | Swim speed (m/s) | ADD duration required |                            | Range of deterrence |                            | Area of deterrence   |                            |
|--------------------------------------|------------------|-----------------------|----------------------------|---------------------|----------------------------|----------------------|----------------------------|
|                                      |                  | Unmitigated           | With -10dB noise reduction | Unmitigated         | With -10dB noise reduction | Unmitigated          | With -10dB noise reduction |
| Harbour porpoise, dolphins and seals | 1.5              | 112 minutes           | 12 minutes                 | 10km                | 1.08km                     | 319km <sup>2</sup>   | 3.7km <sup>2</sup>         |
| Minke whale                          | 3.25             | 93 minutes            | 25 minutes                 | 18km                | 4.9km                      | 1,033km <sup>2</sup> | 75.4km <sup>2</sup>        |


49. **Table 4-1** and **Table 4-2** show large decreases in predicted impact ranges with a 10dB noise reduction. With noise reductions the potential impact ranges become more manageable to mitigate the risk of PTS for marine mammals when combined with standard mitigation measures (MMObs, PAM, and ADDs). As stated in section 4.1.1.1 MMObs and PAM can be effective at monitoring the full MA with a 10dB noise reduction.
50. In addition to MMObs and PAM monitoring the ADD can be activated for a decreased duration to deter marine mammals, with 25 minutes of ADD activation required to deter minke whale, compared to 93 minutes, without noise reduction (**Table 4-3**). With a decrease in required ADD durations, the overall noise in the marine environment and therefore any additional disturbance to marine mammals is reduced.

#### 4.1.1.4 Results of noise reduction on Seal Special Areas of Conservation

51. **Figure 4-1** and **Figure 4-2** presents the mitigated (in yellow) and unmitigated (in red) sound contours for piling noise for a single monopile installation at the worst case locations at the DBS East Array Area and DBS West Array Area. The sound contours are unweighted PTS SEL<sub>cum</sub> impact ranges with 5dB increments.

52. **Figure 4-3** presents the unweighted PTS SEL<sub>cum</sub> sound contours with and without a 10dB noise reduction at DBS West Array Area in relation to the grey seal foraging population at sea of the Berwickshire Northumberland and North Coast Special Area of Conservation (SAC). This figure shows that the sound propagation is reduced and further away from the Berwickshire Northumberland and North Coast SAC with a 10dB reduction. Without mitigation the last noise contour at 120dB level is almost 72km from the SAC and with the 10dB noise reduction the sound is approximately 152km away from the Berwickshire Northumberland and North Coast SAC. **Figure 4-3** shows a maximum grey seal mean percentage of at-sea population estimate of 0.04 to 0.07 per km<sup>2</sup> within the unweighted SEL<sub>cum</sub> that could be impacted from piling noise with a 10dB noise reduction. This shows that a very small proportion of the Berwickshire Northumberland and North Coast SAC grey seal population could be impacted from piling noise.
53. **Figure 4-4** presents the unweighted PTS SEL<sub>cum</sub> sound contours with and without a 10dB noise reduction at DBS East Array Area in relation to the grey seal at sea foraging population of the Humber Estuary SAC. The unmitigated sound contours fall in range of the higher grey seal densities at the Humber Estuary SAC, however, by adding a 10dB reduction, the unweighted SEL<sub>cum</sub> sound contours do not propagate into that area. **Figure 4-4** shows a maximum grey seal mean percentage of at-sea population estimate of 0.2 to 0.3 per km<sup>2</sup> within the potential impact range from unmitigated piling noise; while a mean percentage of at-sea population estimate of 0.02 to 0.04 per km<sup>2</sup> of the Humber Estuary SAC population that could be impacted by piling noise with a 10dB noise reduction.
54. **Figure 4-5** presents the unweighted PTS SEL<sub>cum</sub> sound contours with and without a 10dB noise reduction at DBS East Array Area in relation to the harbour seal at sea foraging population of the Wash and North Norfolk Coast SAC. The unmitigated sound contours fall in range of the higher harbour seal density from the Wash and North Norfolk Coast SAC, however, by adding a 10dB reduction, the unweighted SEL<sub>cum</sub> sound contours do not propagate into that area. **Figure 4-5** shows a maximum harbour seal mean percentage of at-sea population estimate of 0.04 to 0.07 per km<sup>2</sup> within the potential impact range from unmitigated piling noise; while a mean percentage of at-sea population estimate of 0.004 to 0.016 per km<sup>2</sup> of the Wash and North Norfolk Coast SAC population that could be impacted by piling noise with a 10dB noise reduction.



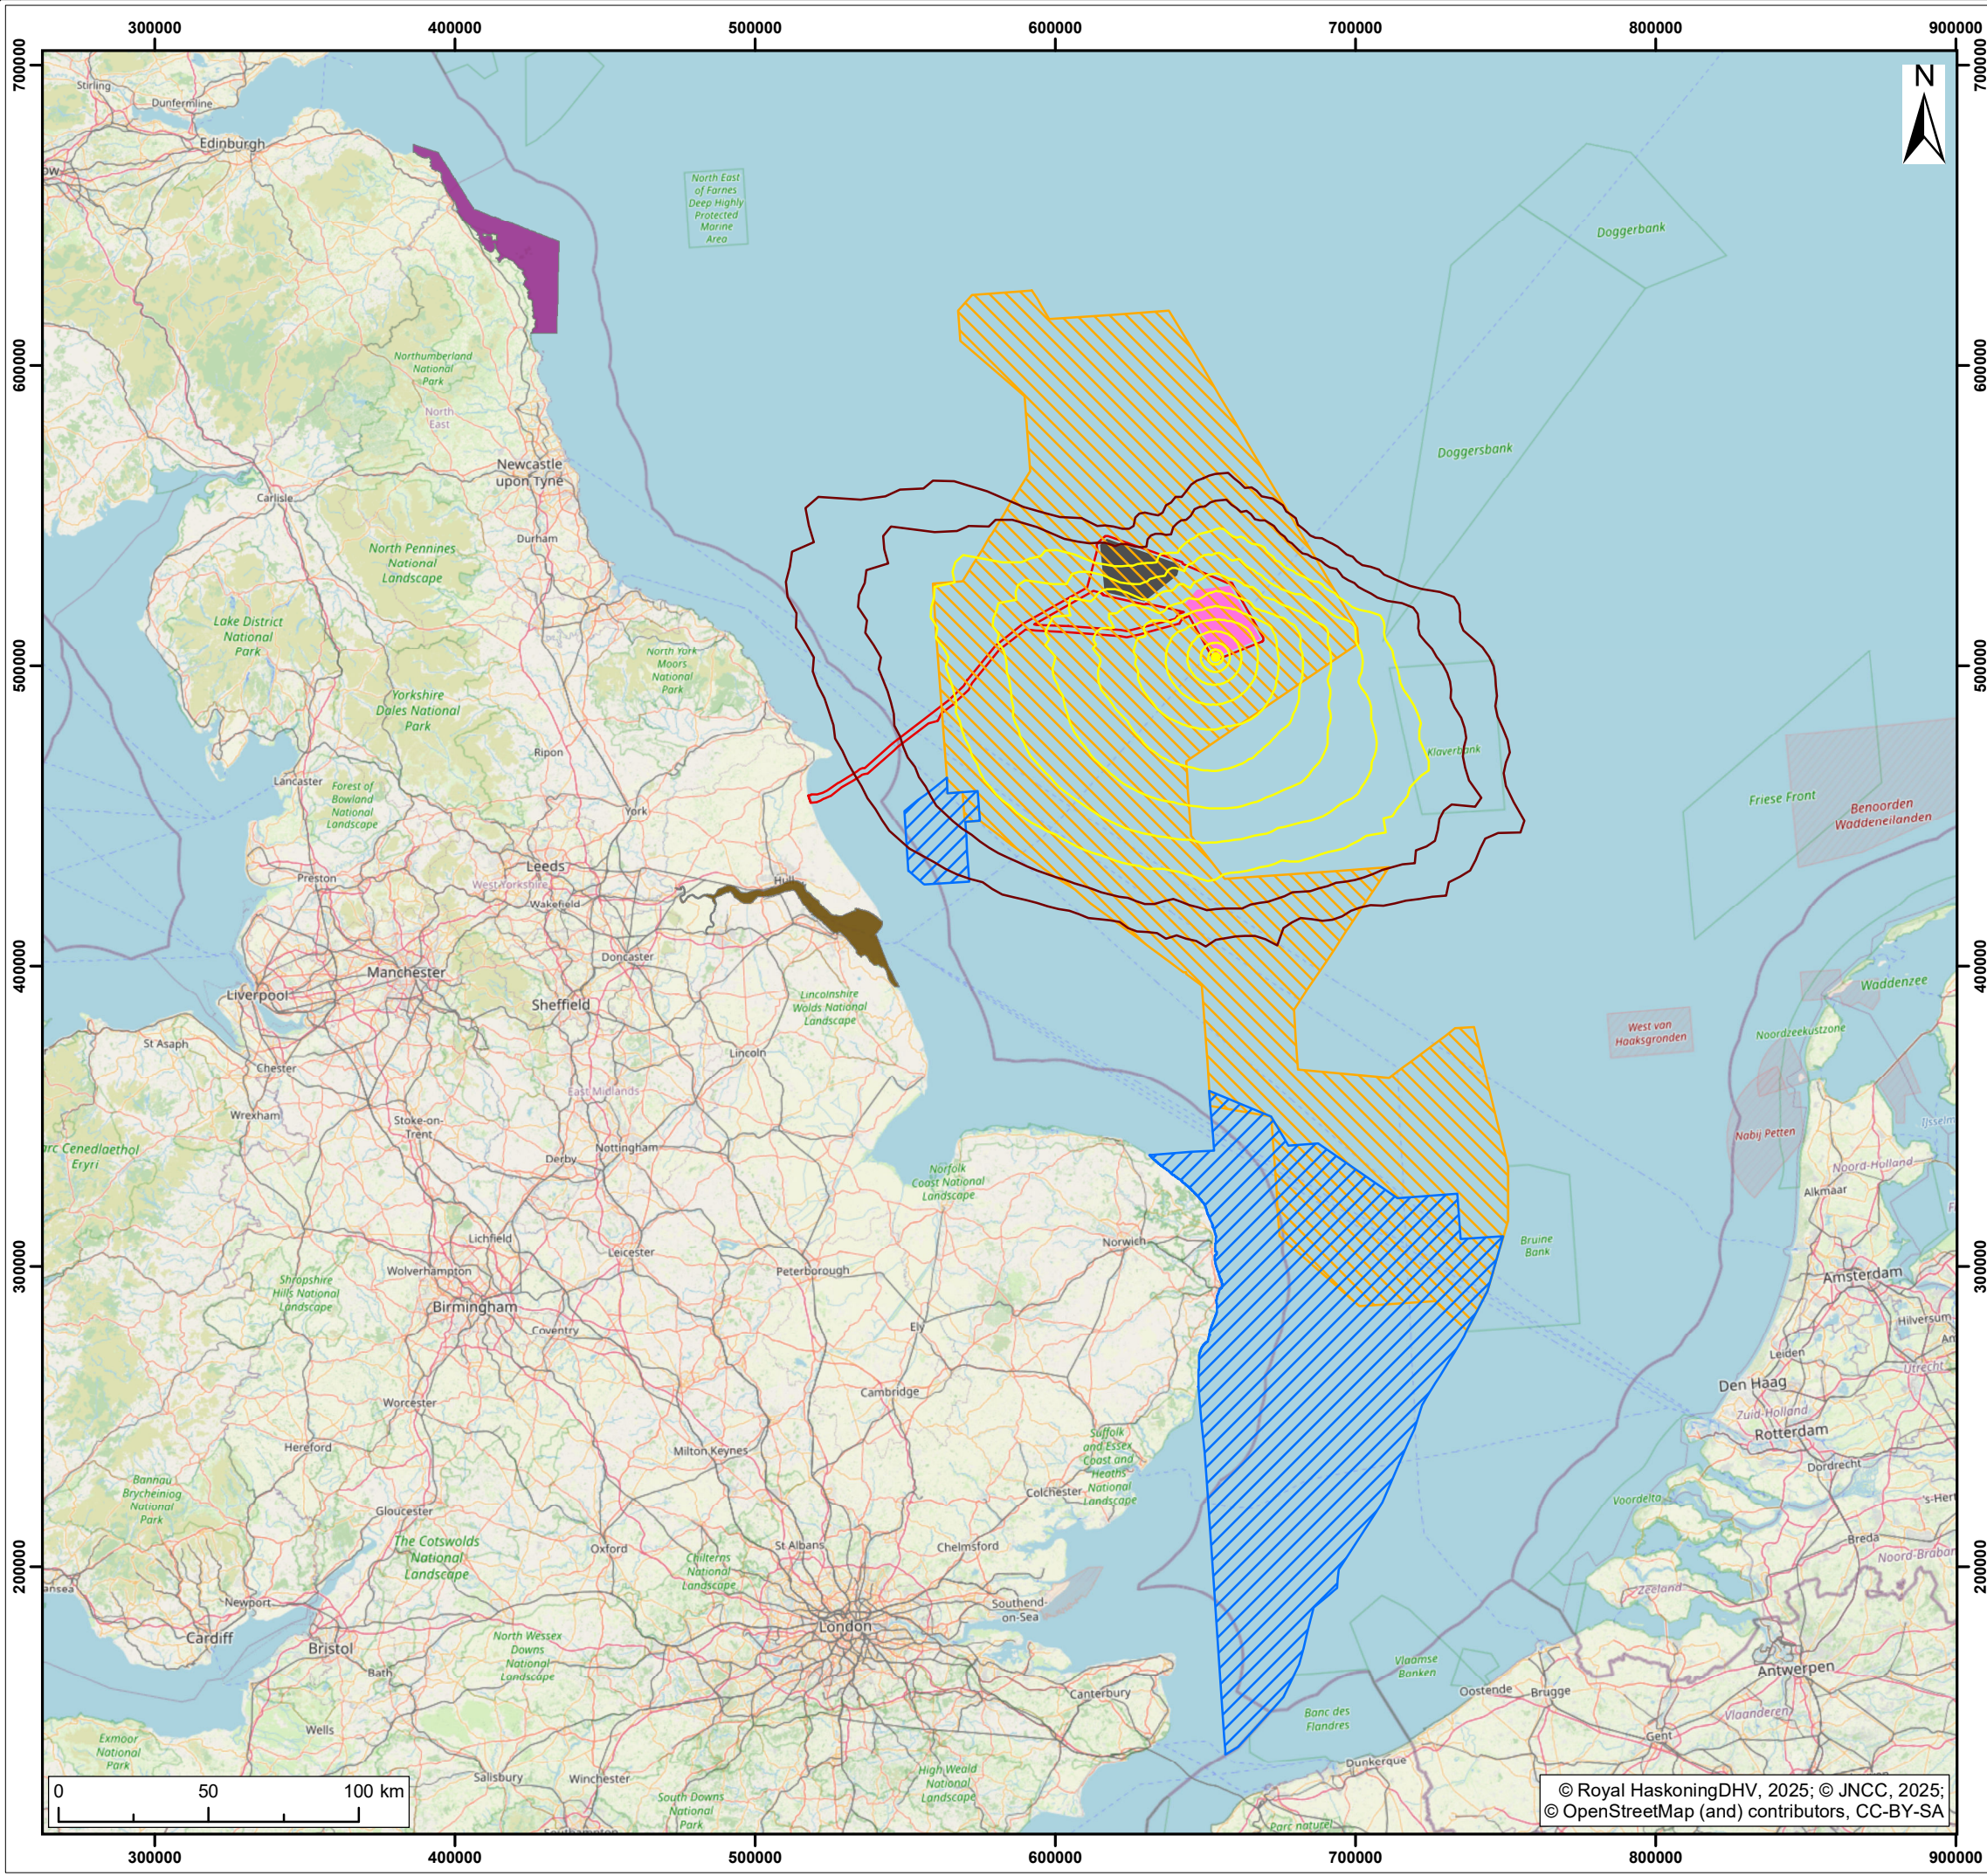

- Legend:
- Offshore Development Area
  - DBS East Array Area
  - DBS West Array Area
  - Berwickshire and North Northumberland Coast Special Area of Conservation (SAC)
  - Humber Estuary Special Area of Conservation (SAC)
  - Southern North Sea Summer Area
  - Southern North Sea Winter Area
  - DBS East Mitigated (-10dB) Unwtd SELss 5dB increments
  - DBS East Unmitigated Unwtd SELss 5dB increments


|     |     |            |                          |     |     |     |
|-----|-----|------------|--------------------------|-----|-----|-----|
|     |     |            |                          |     |     |     |
| S2  | P01 | 04/04/2025 | Suitable for information | SM  | SB  | RF  |
| SUI | REV | DATE       | DESCRIPTION              | DRW | CHK | APR |

Title:

Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS East Array Area

|                                                          |  |                                                |                       |
|----------------------------------------------------------|--|------------------------------------------------|-----------------------|
| Figure: 4-1                                              |  | Drawing No: PC2340-RHD-OF-ZZ-DR-Z-1035         |                       |
| Co-ordinate system:<br>British National Grid             |  | Page Size:<br>A3                               | Scale:<br>1:2,200,000 |
| Project:<br><br>Dogger Bank South<br>Offshore Wind Farms |  | Report:<br><br>Marine Mammal<br>Sound Contours |                       |



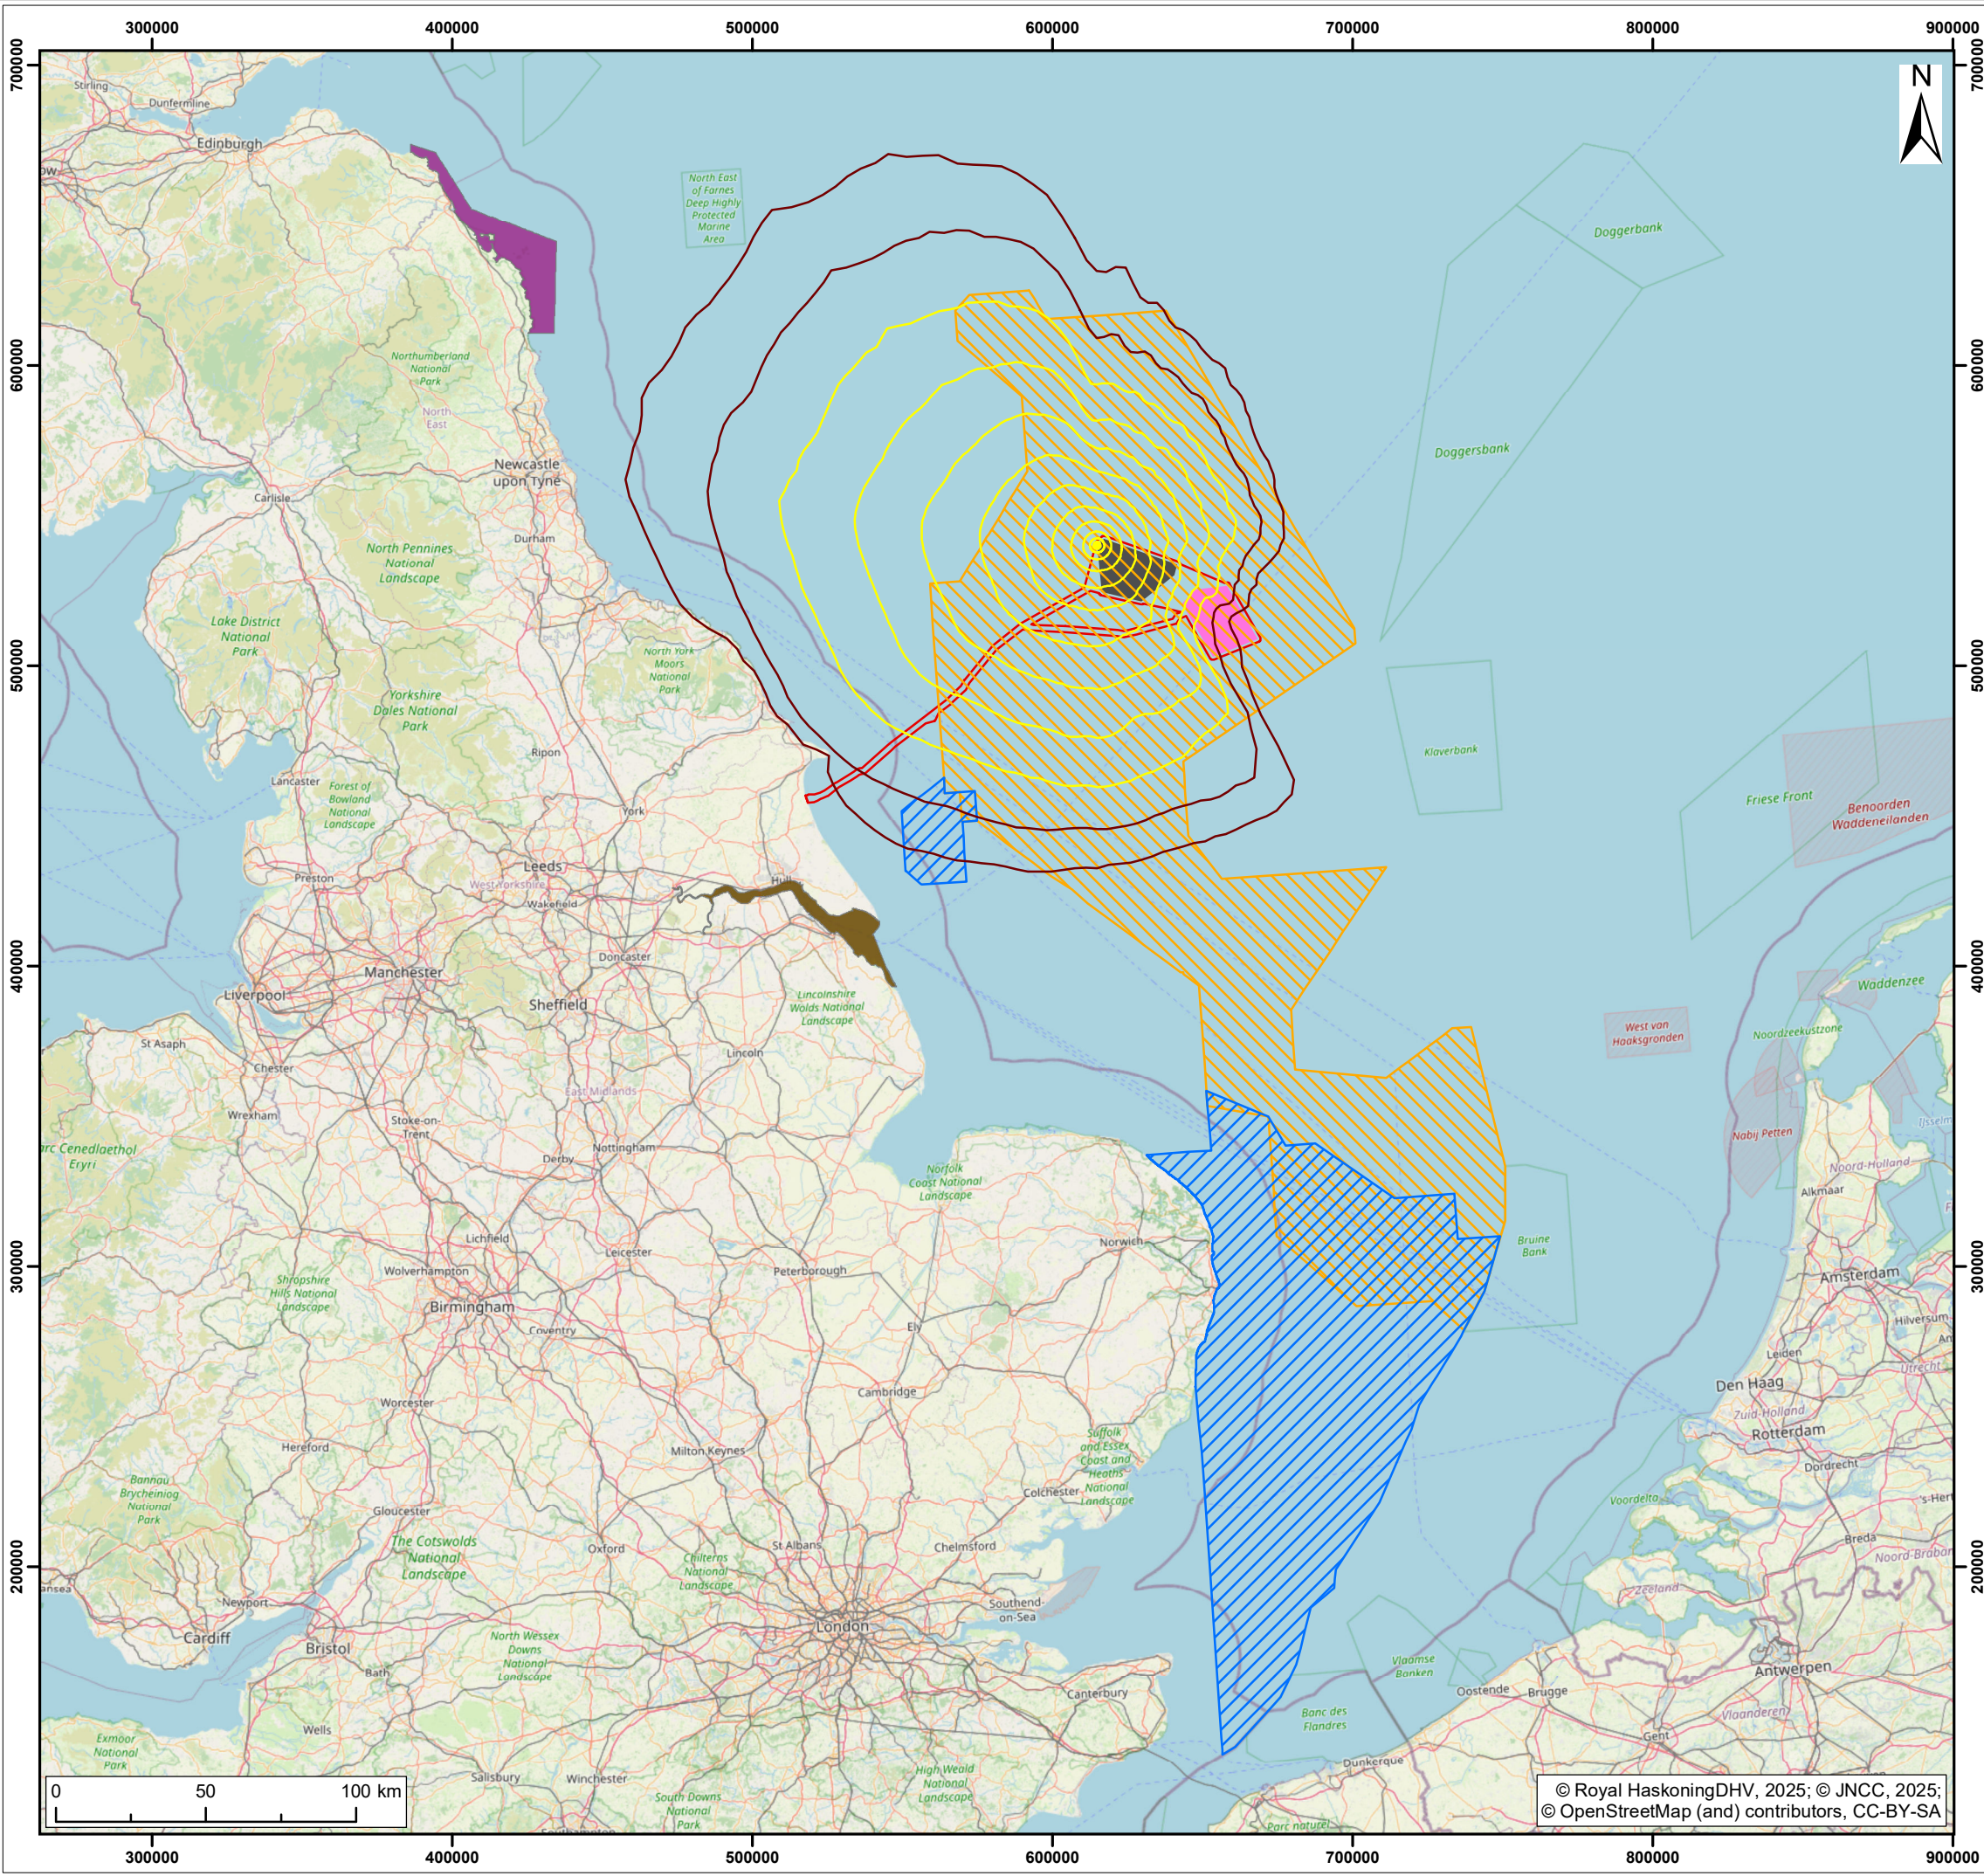


- Legend:
- Offshore Development Area
  - DBS East Array Area
  - DBS West Array Area
  - Berwickshire and North Northumberland Coast Special Area of Conservation (SAC)
  - Humber Estuary Special Area of Conservation (SAC)
  - Southern North Sea Summer Area
  - Southern North Sea Winter Area
  - DBS West Mitigated (-10dB) Unwtd SELss 5dB increments
  - DBS West Unmitigated Unwtd SELss 5dB increments

|     |     |            |                          |     |     |     |
|-----|-----|------------|--------------------------|-----|-----|-----|
|     |     |            |                          |     |     |     |
| S2  | P01 | 04/04/2025 | Suitable for information | SM  | SB  | RF  |
| SUI | REV | DATE       | DESCRIPTION              | DRW | CHK | APR |

Title:  
Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS West Array Area

|                                                          |                                        |                                                |                       |
|----------------------------------------------------------|----------------------------------------|------------------------------------------------|-----------------------|
| Figure: 4-2                                              | Drawing No: PC2340-RHD-OF-ZZ-DR-Z-1036 |                                                |                       |
| Co-ordinate system:<br>British National Grid             |                                        | Page Size:<br>A3                               | Scale:<br>1:2,200,000 |
| Project:<br><br>Dogger Bank South<br>Offshore Wind Farms |                                        | Report:<br><br>Marine Mammal<br>Sound Contours |                       |



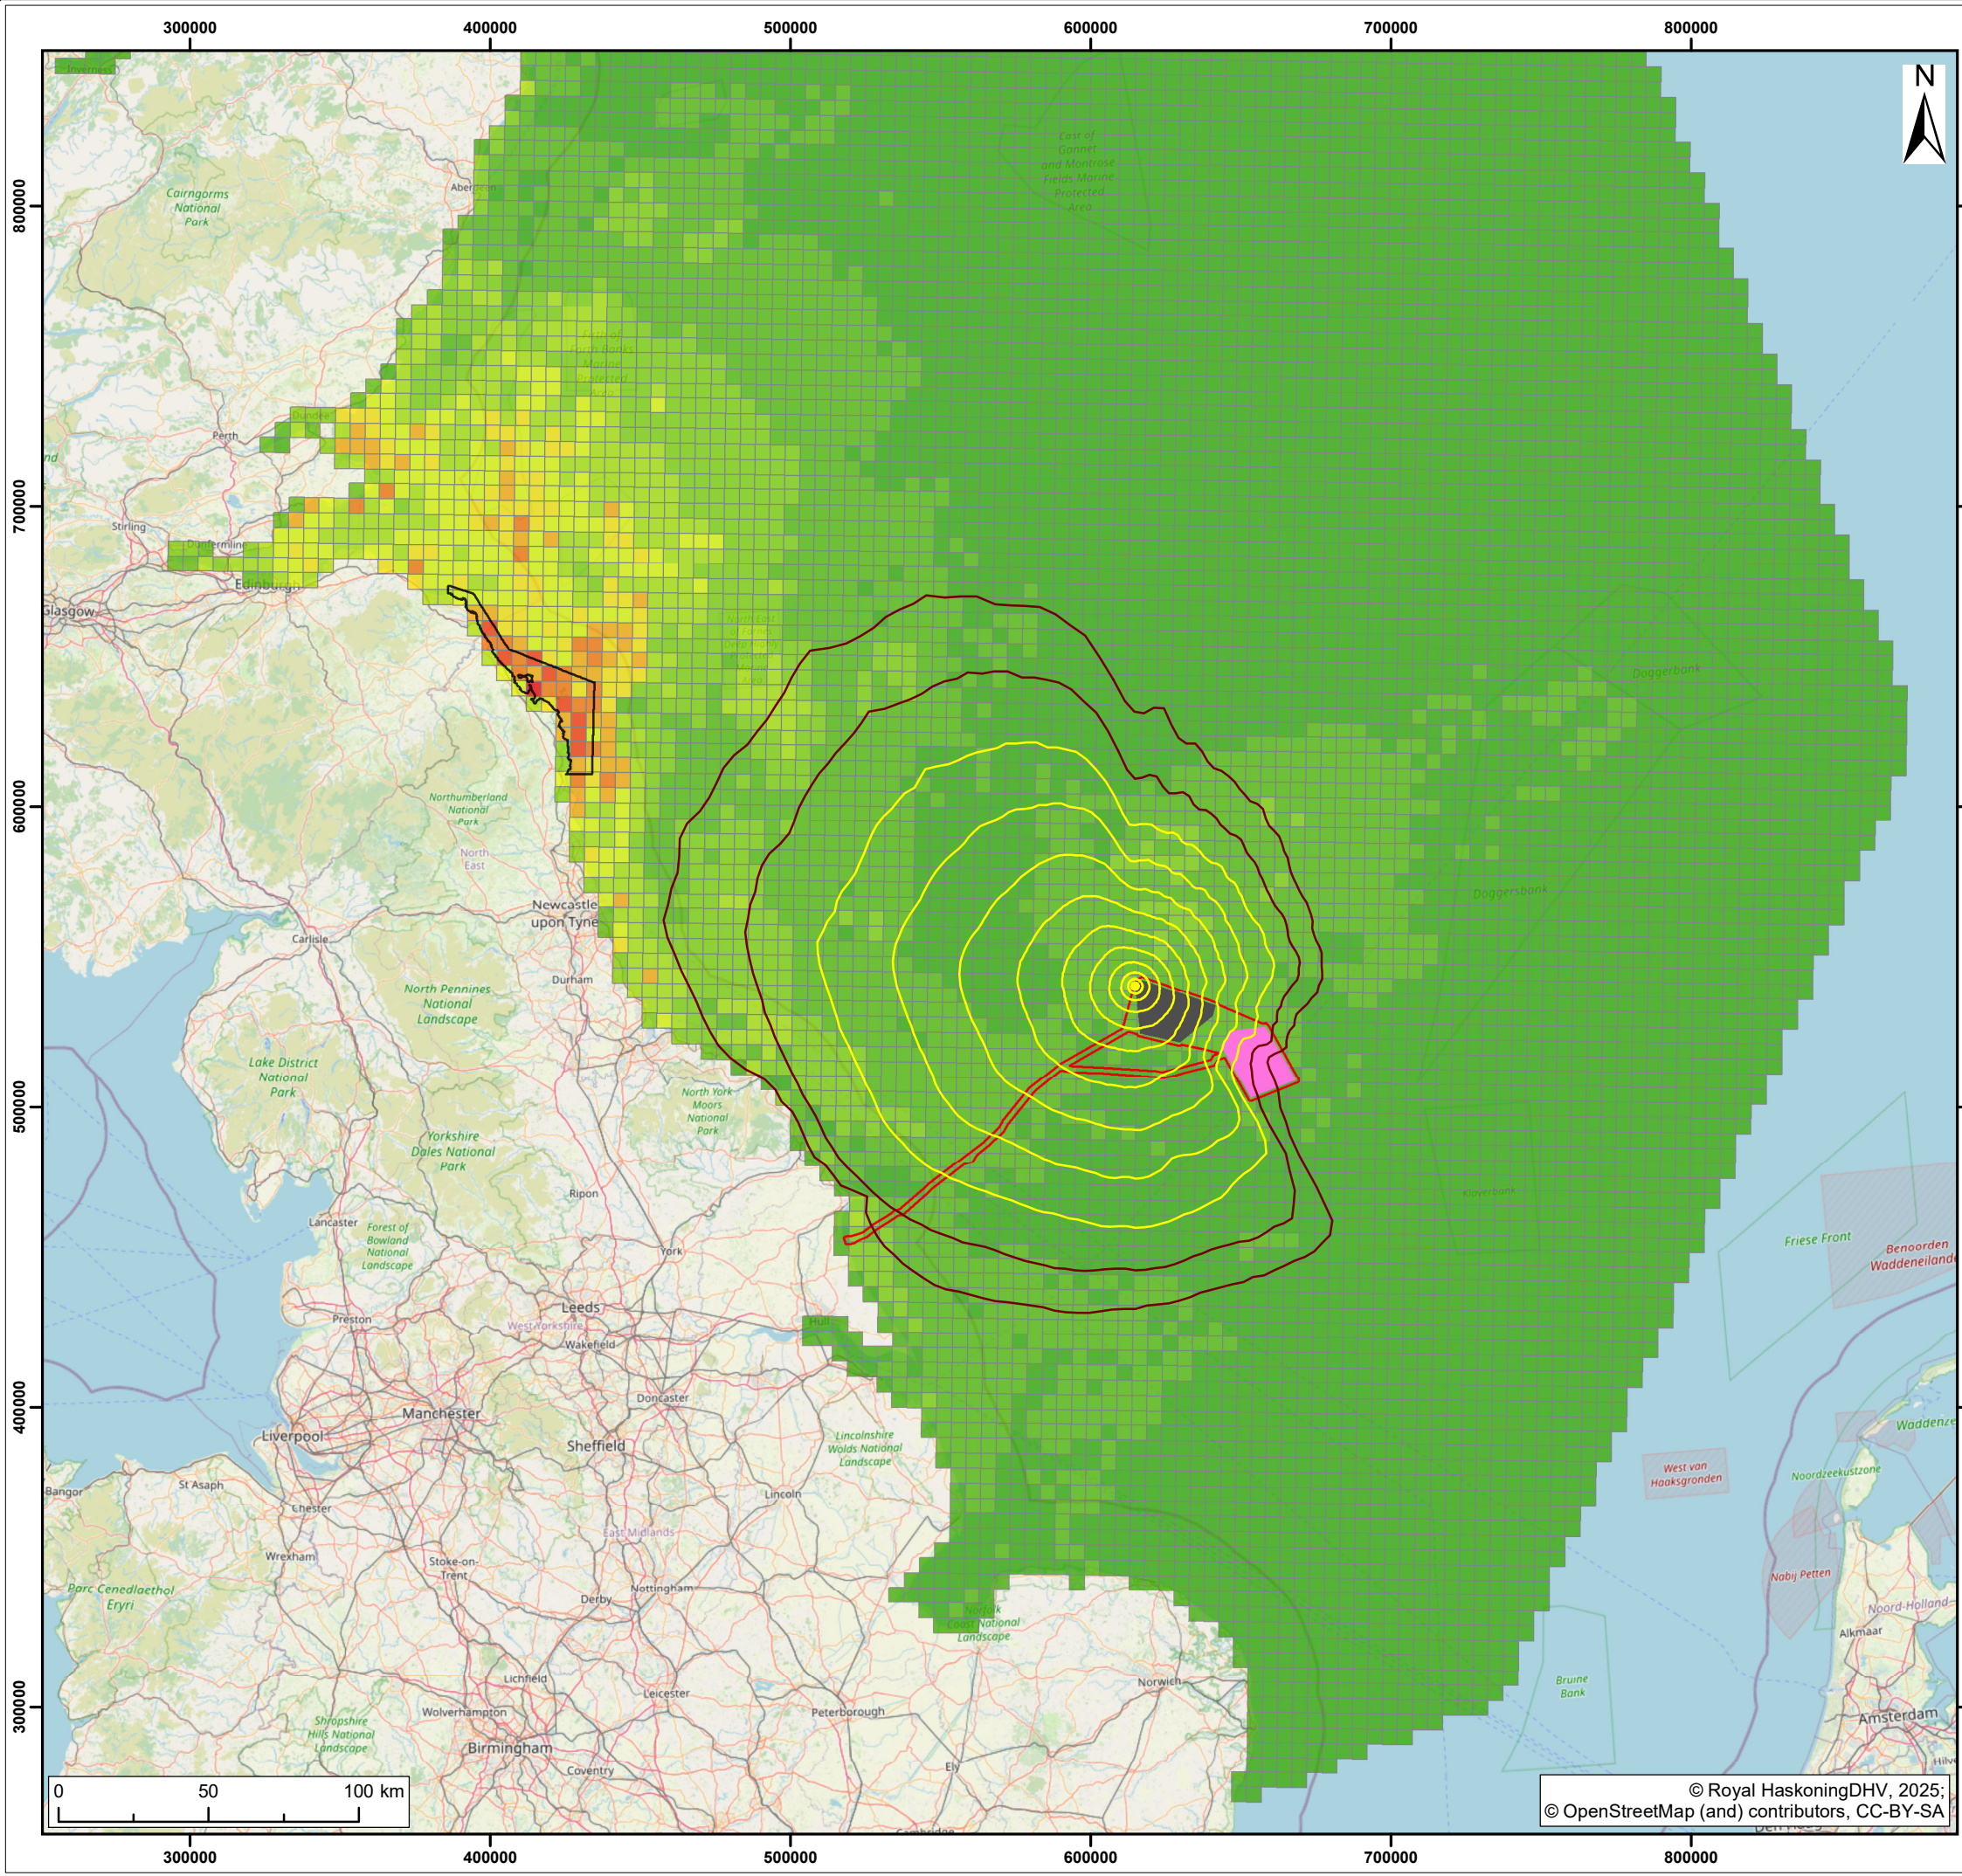

- Legend:
- Offshore Development Area
  - DBS East Array Area
  - DBS West Array Area
  - Berwickshire and North Northumberland Coast SAC
  - DBS West Mitigated (-10dB) Unwtd SELss 5dB increments
  - DBS West Unmitigated Unwtd SELss 5dB increments

**Berwickshire and North Northumberland Coast SAC**  
Proportion of the population per 25km<sup>2</sup> (as a %)

|                     |                     |
|---------------------|---------------------|
| 0.000000 - 0.004647 | 0.118942 - 0.183456 |
| 0.004648 - 0.016101 | 0.183457 - 0.288694 |
| 0.016102 - 0.039155 | 0.288695 - 0.523660 |
| 0.039156 - 0.074405 | 0.523661 - 1.012806 |
| 0.074406 - 0.118941 | 1.012807 - 1.803618 |

Maps show mean percentage of at-sea population estimated to be present in each 5 km x 5 km grid cell square at any one time, and the cellsquare-wise (Carter et al., 2022)


|     |     |            |                          |     |     |     |
|-----|-----|------------|--------------------------|-----|-----|-----|
|     |     |            |                          |     |     |     |
|     |     |            |                          |     |     |     |
| S2  | P01 | 08/04/2025 | Suitable for information | SM  | SB  | RF  |
| SUI | REV | DATE       | DESCRIPTION              | DRW | CHK | APR |

Title: Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS West Area, with the at sea foraging density of grey seal at the Berwickshire Northumberland and North Coast SAC (Carter et al. 2022)

Figure: 4-3 Drawing No: PC2340-RHD-OF-ZZ-DR-Z-1037

|                                                      |                                            |                       |
|------------------------------------------------------|--------------------------------------------|-----------------------|
| Co-ordinate system:<br>British National Grid         | Page Size:<br>A3                           | Scale:<br>1:2,200,000 |
| Project:<br>Dogger Bank South<br>Offshore Wind Farms | Report:<br>Marine Mammal<br>Sound Contours |                       |



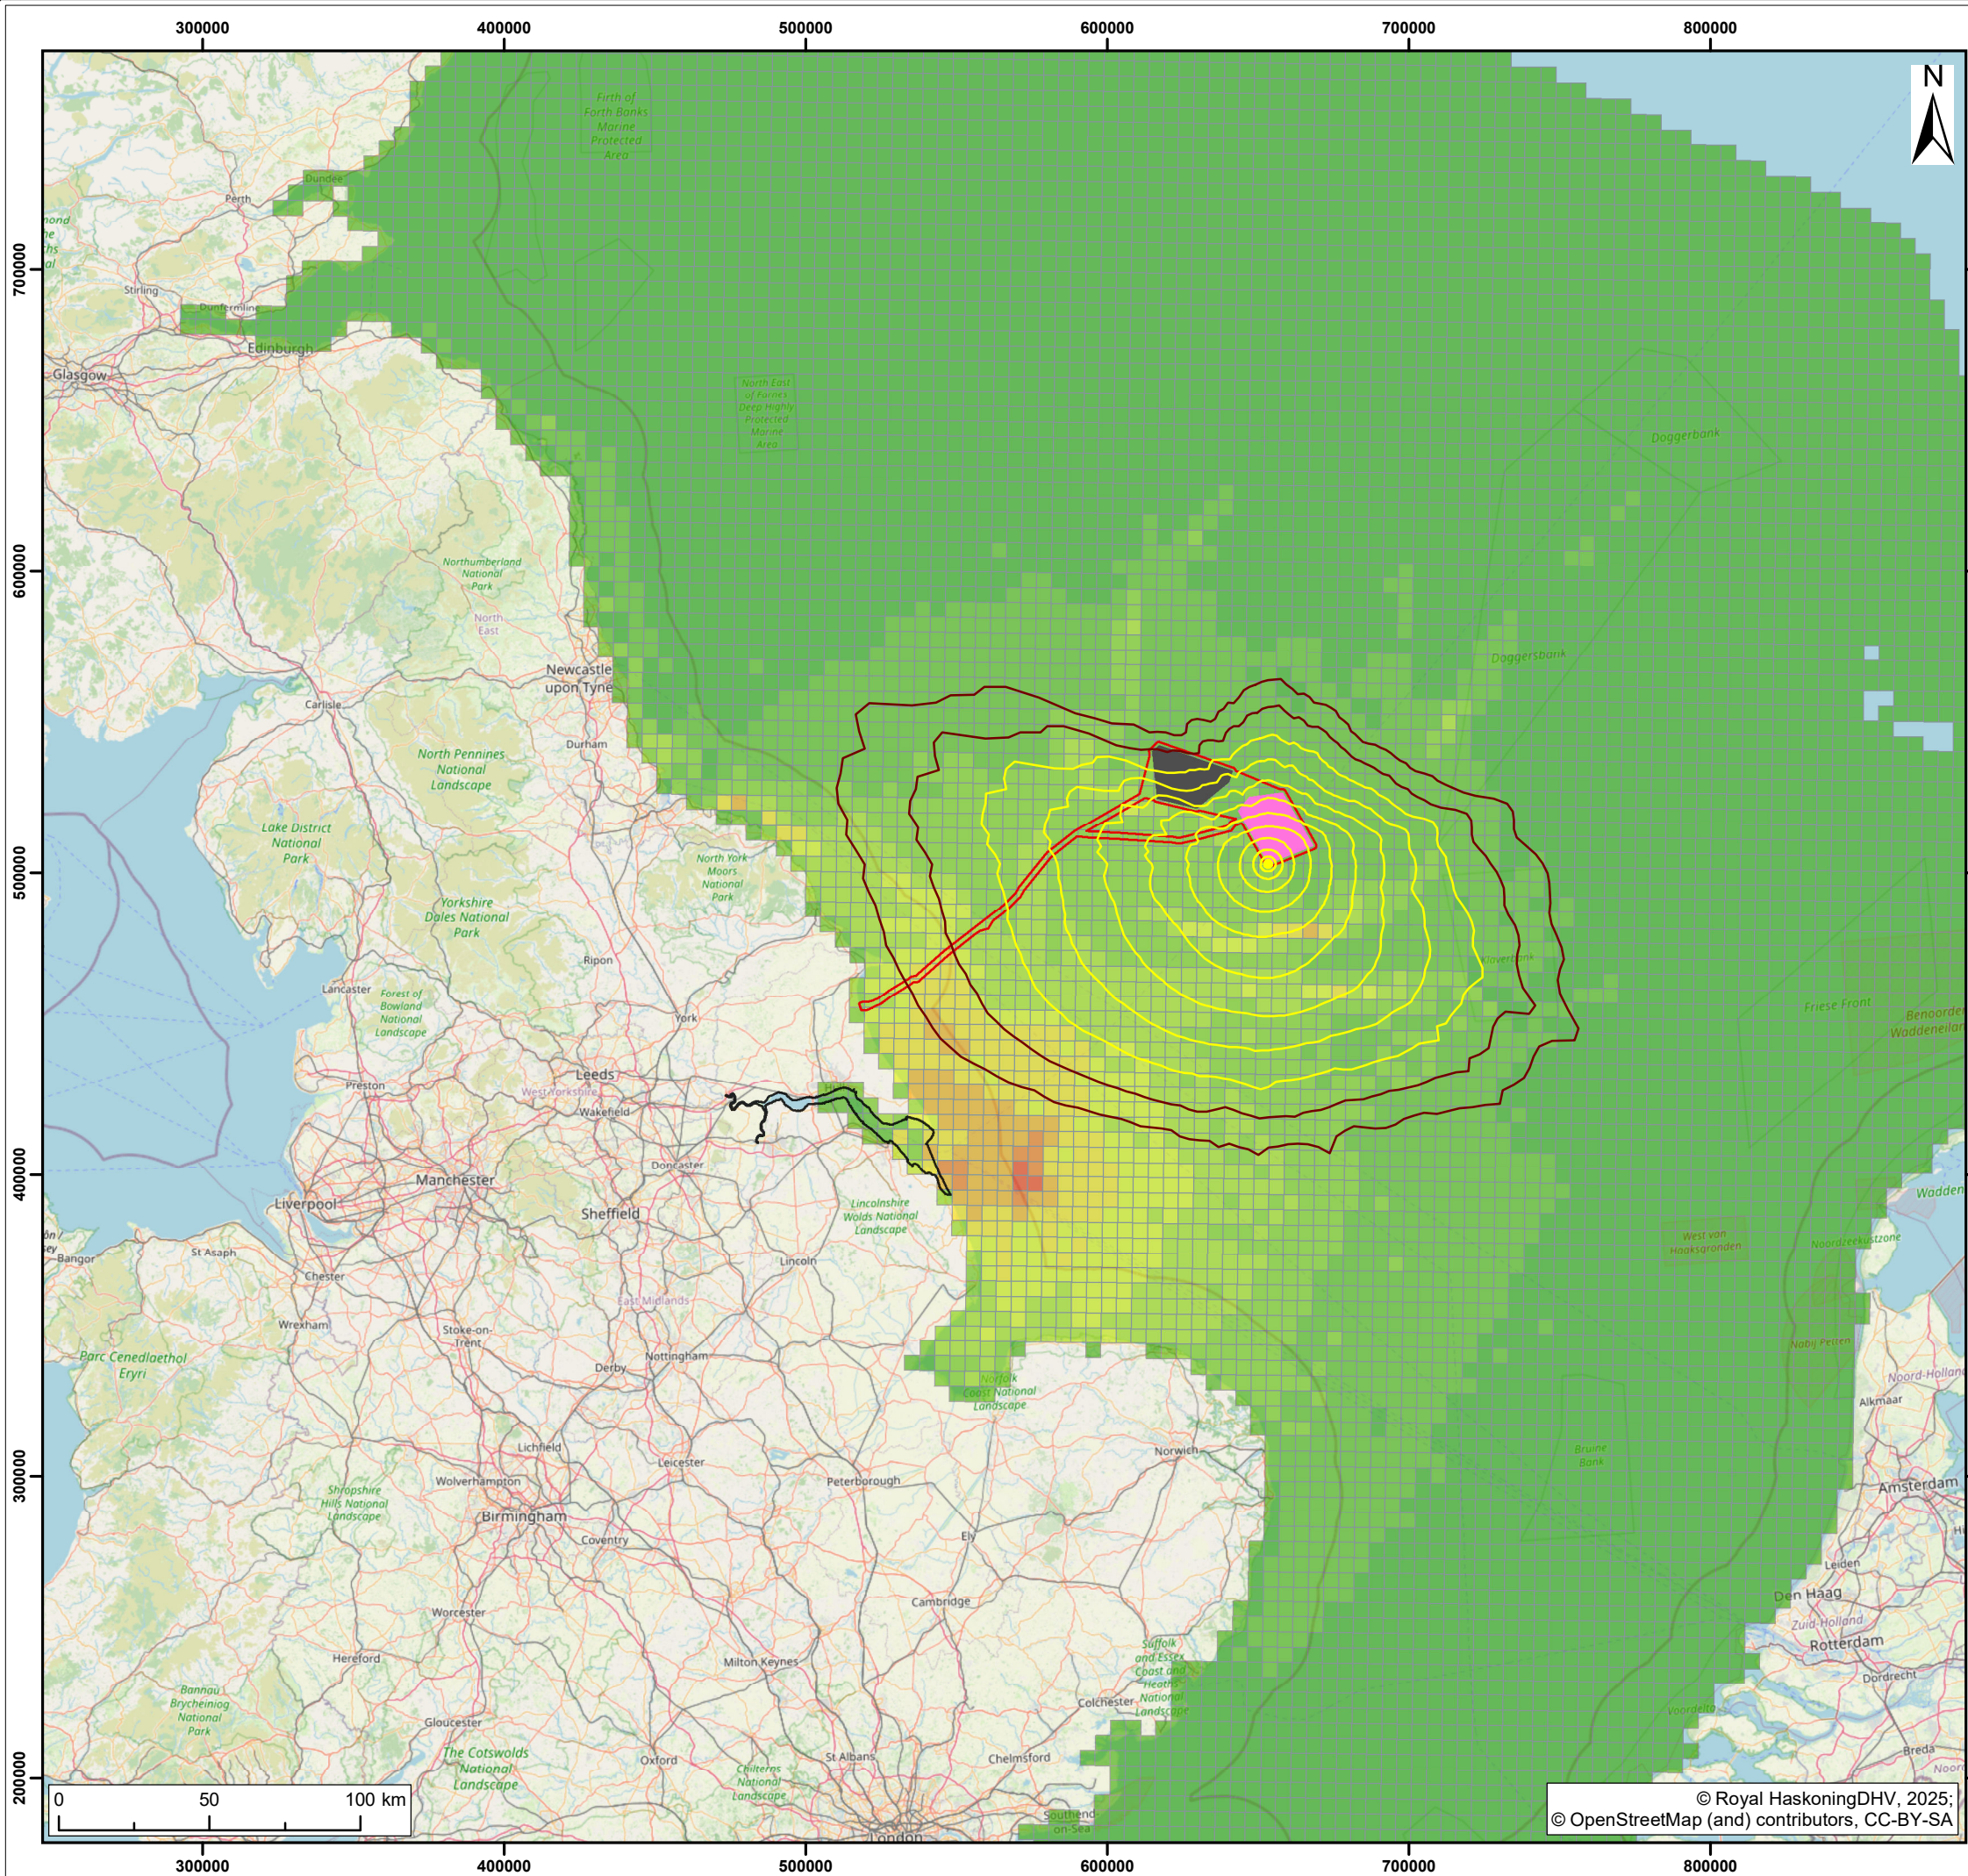

- Legend:
- Offshore Development Area
  - DBS East Array Area
  - DBS West Array Area
  - Humber SAC
  - DBS East Mitigated (-10dB) Unwtd SELss 5dB increments
  - DBS East Unmitigated Unwtd SELss 5dB increments

**Humber SAC**  
Proportion of the population per 25km² (as a %)

|                     |                     |
|---------------------|---------------------|
| 0.000000 - 0.004647 | 0.118942 - 0.183456 |
| 0.004648 - 0.016101 | 0.183457 - 0.288694 |
| 0.016102 - 0.039155 | 0.288695 - 0.523660 |
| 0.039156 - 0.074405 | 0.523661 - 1.012806 |
| 0.074406 - 0.118941 | 1.012807 - 1.803618 |

Maps show mean percentage of at-sea population estimated to be present in each 5 km x 5 km grid cell square at any one time, and the cellsquare-wise (Carter et al., 2022)

|     |     |            |                          |     |     |     |
|-----|-----|------------|--------------------------|-----|-----|-----|
|     |     |            |                          |     |     |     |
| S2  | P01 | 08/04/2025 | Suitable for information | SM  | SB  | RF  |
| SUI | REV | DATE       | DESCRIPTION              | DRW | CHK | APR |

Title: Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS East Array Area, with the at sea foraging density of grey seal at the Humber Estuary SAC (Carter et al. 2022)


Figure: 4-4 Drawing No: PC2340-RHD-OF-ZZ-DR-Z-1038

Co-ordinate system: British National Grid Page Size: A3 Scale: 1:2,200,000

Project: Dogger Bank South Offshore Wind Farms Report: Marine Mammal Sound Contours





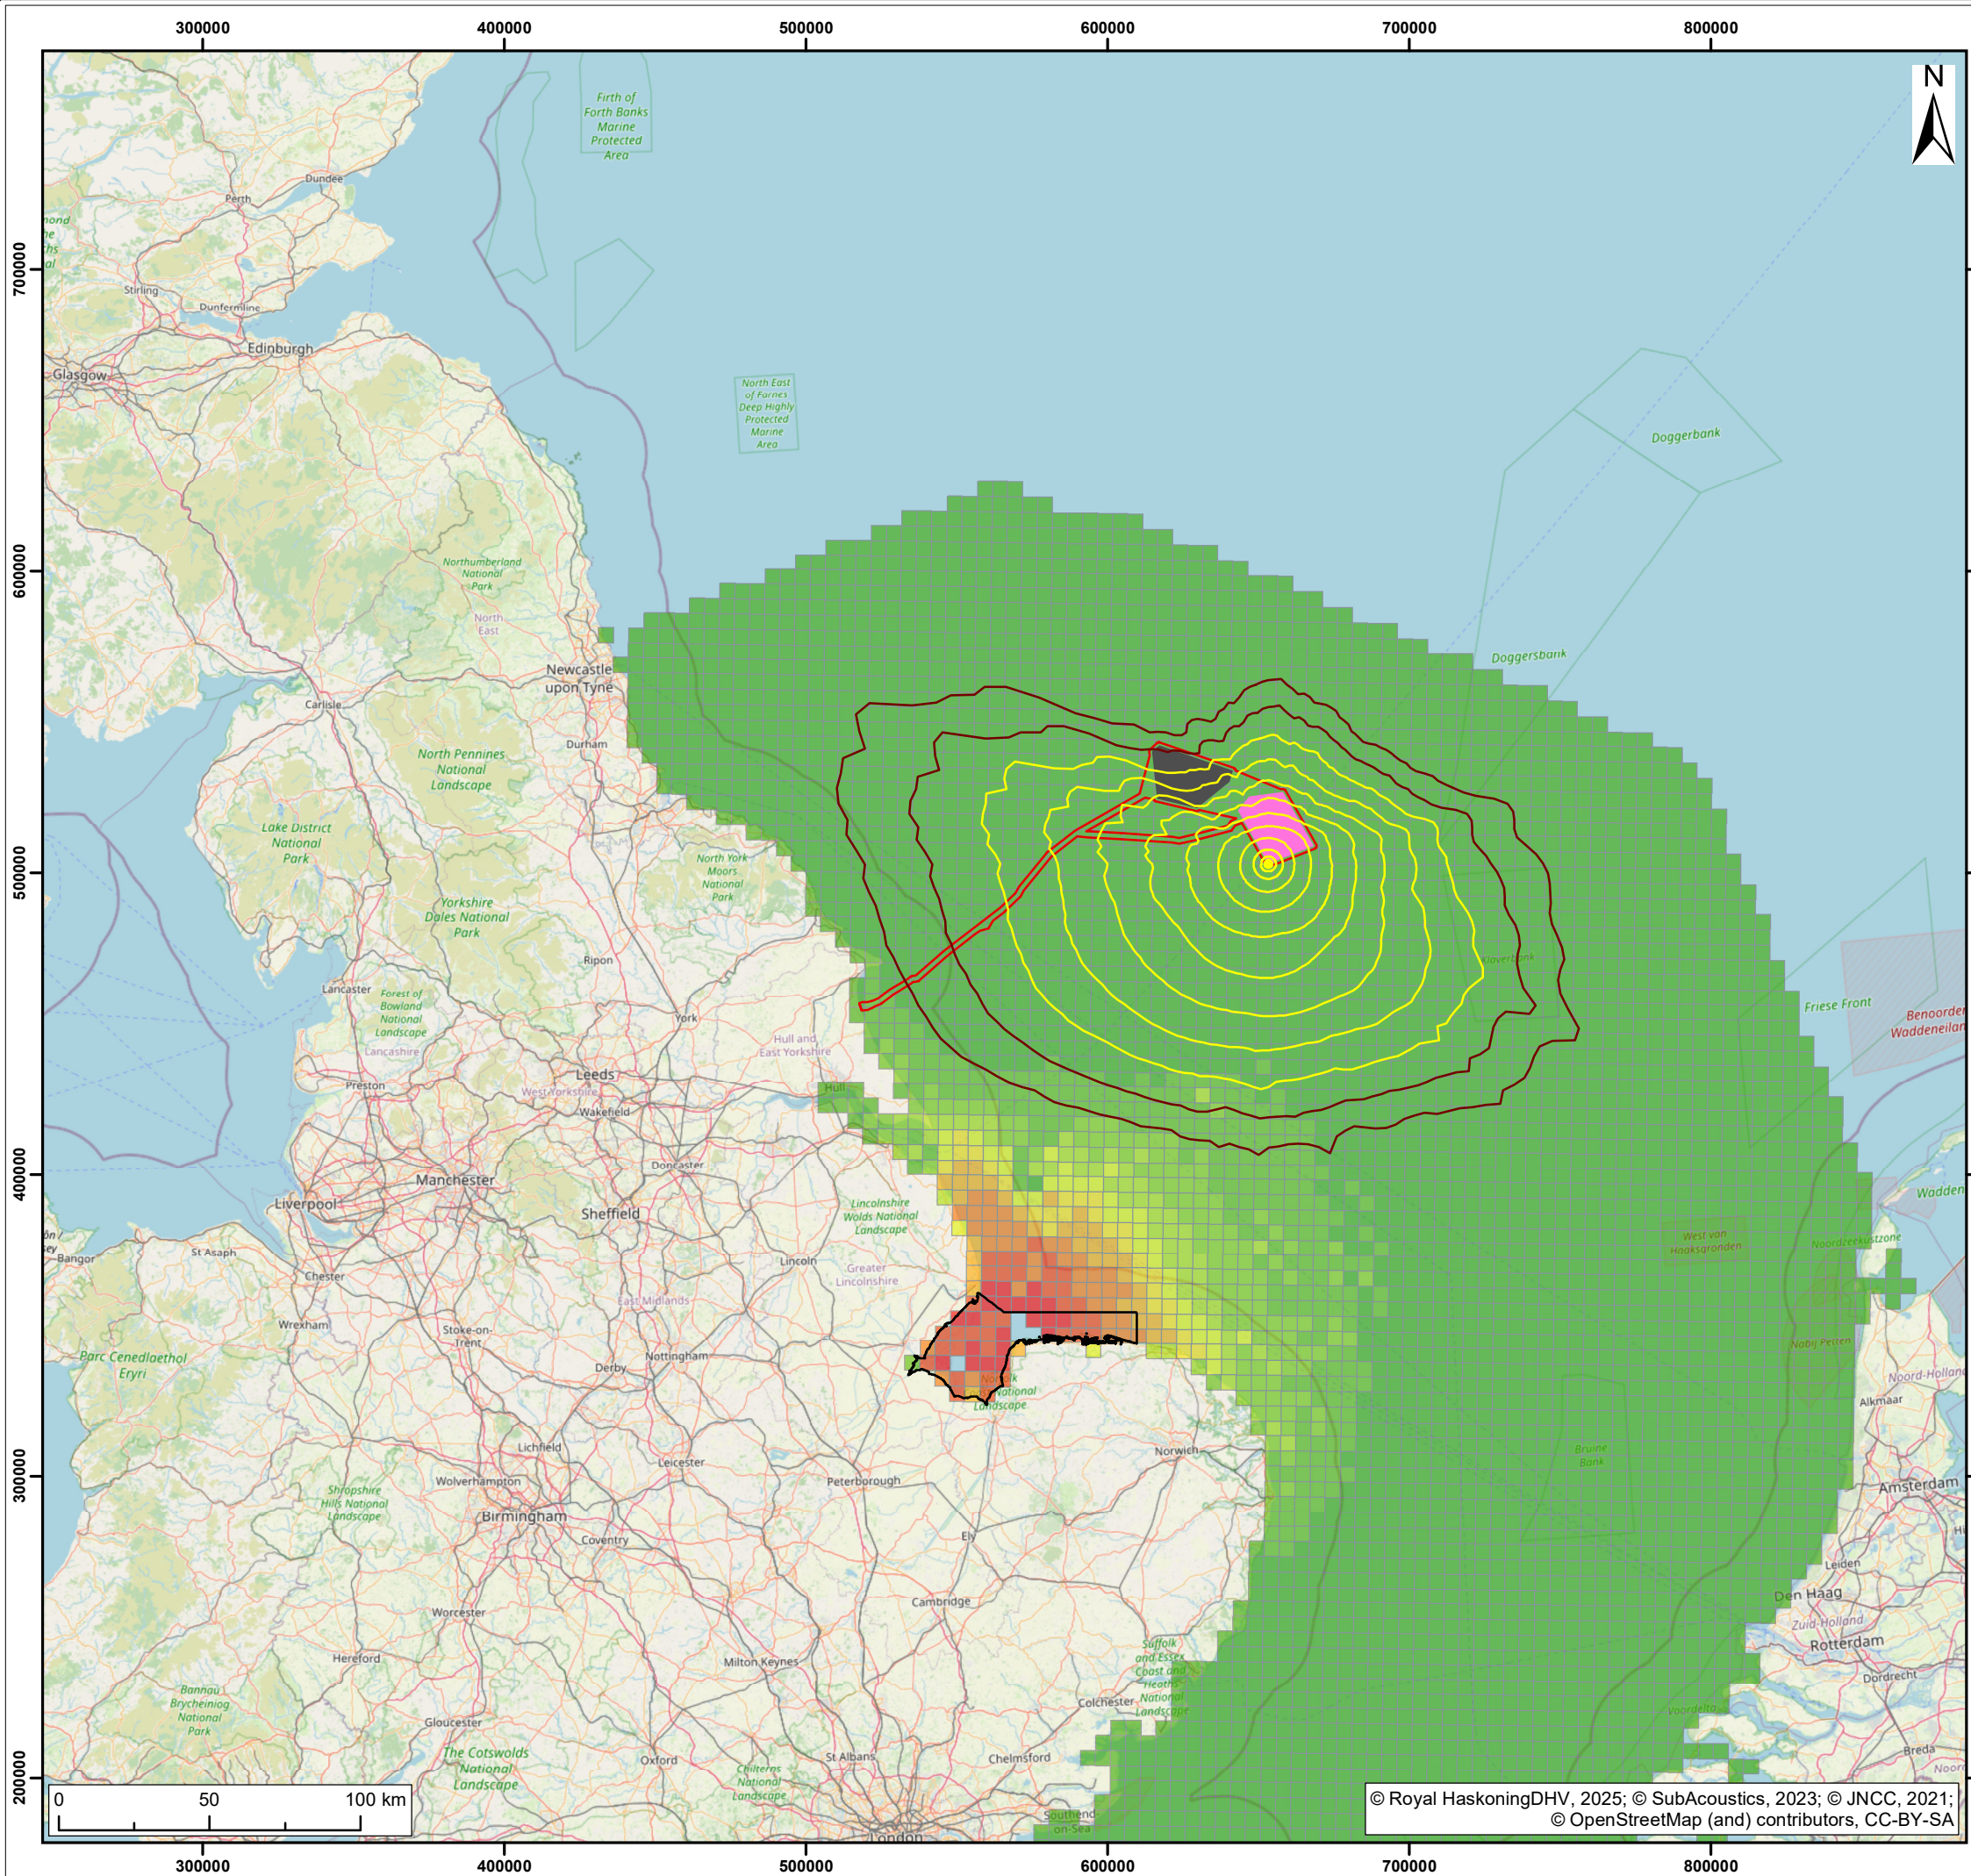

- Legend:
- Offshore Development Area
  - DBS East Array Area
  - DBS West Array Area
  - The Wash and North Norfolk Coast SAC
  - DBS East Mitigated (-10dB) Unwtd SELss 5dB increments
  - DBS East Unmitigated Unwtd SELss 5dB increments

**The Wash and North Norfolk Coast SAC**  
**Proportion of the population per 25km<sup>2</sup> (as a %)**

|                     |                     |
|---------------------|---------------------|
| 0.000000 - 0.004647 | 0.118942 - 0.183456 |
| 0.004648 - 0.016101 | 0.183457 - 0.288694 |
| 0.016102 - 0.039155 | 0.288695 - 0.523660 |
| 0.039156 - 0.074405 | 0.523661 - 1.012806 |
| 0.074406 - 0.118941 | 1.012807 - 1.803618 |

Maps show mean percentage of at-sea population estimated to be present in each 5 km x 5 km grid cell square at any one time, and the cellsquare-wise (Carter et al., 2022)

|     |     |            |                          |     |     |     |
|-----|-----|------------|--------------------------|-----|-----|-----|
|     |     |            |                          |     |     |     |
|     |     |            |                          |     |     |     |
| S2  | P01 | 20/06/2025 | Suitable for information | SM  | AS  | RF  |
| SUI | REV | DATE       | DESCRIPTION              | DRW | CHK | APR |

Title:  
Mitigated and Unmitigated Sound Contour files at 5dB increments at DBS East Array Area, with the at sea foraging density of grey seal at The Wash and North Norfolk Coast SAC (Carter et al. 2022)

Figure: 4-5      Drawing No: PC2340-RHD-OF-ZZ-DR-Z-1097

Co-ordinate system: British National Grid      Page Size: A3      Scale: 1:2,200,000

Project: Dogger Bank South Offshore Wind Farms      Report: Marine Mammal Sound Contours





## 4.2 Projects Together

### 4.2.1 PTS Impact Areas

55. Table 4-4 presents the potential impact areas from the concurrent piling monopile scenarios at DBS East and DBS West Array Areas with and without the 10dB noise reduction.
56. The potential impact areas are decreased from 2,400km<sup>2</sup> as presented in Table 11-26 of Chapter 11 Marine Mammals (Revision 2) [APP-095] to 290km<sup>2</sup> for minke whale (Table 4-4) and from 1,400km<sup>2</sup> (Table 11-26 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11]) to 180km<sup>2</sup> for harbour porpoise when considering a 10dB reduction at source (Table 4-4).

Table 4-4 Summary of the Potential Impact Areas for the Concurrent Installation of Monopile Foundations at multiple locations at the Projects, for Marine Mammals using the Impulsive Southall *et al.* (2019) criteria assuming a fleeing animal. [Table 11-26 of Chapter 11 Marine Mammals (Revision 2) [document reference 7.11]]

| Marine mammal species                                                     | Potential impact areas for PTS due to cumulative exposure |                             |
|---------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------------|
| Cumulative exposure from two sequential monopiles in both the Array Areas |                                                           |                             |
|                                                                           | Unmitigated presented in the ES                           | With -10 dB noise reduction |
| Harbour porpoise                                                          | 1,400km <sup>2</sup>                                      | 180km <sup>2</sup>          |
| Dolphin species                                                           | 0.2km <sup>2</sup>                                        | <0.1km <sup>2</sup>         |
| Minke whale                                                               | 2,400km <sup>2</sup>                                      | 290km <sup>2</sup>          |
| Seal species                                                              | 230km <sup>2</sup>                                        | <0.01km <sup>2</sup>        |

## 4.3 Summary

57. The modelling presented within the ES is based on a precautionary design envelope and without mitigation. It is likely that the DBS Projects would be developed with a less impactful envelope than that presented in the ES and that noise reduction would be provided that would deliver substantial reductions of impact ranges, benefitting marine mammals. The 10dB reduction has been shown to be achievable in practice and is a fair illustration of what might be achievable through altering the worst case scenario presented in the ES and the adoption of noise reduction measures. The illustrative results from the underwater noise modelling with noise reduction measures to present a 10dB reduction in sound levels show a decrease in the predicted impact ranges for marine mammals.
58. **The Outline MMMP (Revision 4)** [REP4-054] has been updated, and submitted at Deadline 2, in reference to the Defra Policy Paper on Reducing Marine Noise that was published on 21<sup>st</sup> January 2025 as part of Defra's Marine Noise Package.
59. In line with this policy the Projects will utilise best endeavours to deliver noise reductions, where applicable, through the use of primary and / or secondary noise reduction based on the final project design. By utilising measures of primary and / or secondary noise reduction it would ensure that the final project design and mitigation measures applied would result in no residual PTS. With a 10dB reduction the MA would be reduced, so that MMObs, PAM and the ADD could ensure the PTS range is fully cleared before the start of impact piling.
60. The decrease in impact ranges with a 10dB reduction would also minimise disturbance of all marine mammal species in the wider area and a lower effective deterrence range could be applied to the calculations for the Projects in the Southern North Sea SAC Site Integrity Plan, reducing their contribution to seasonal and daily thresholds for underwater noise.



## References

- Bellmann, M. A., Brinkmann, J., May, A., Wendt, T., Gerlach, S. and Remmers, P. (2020). 'Underwater noise during the impulse pile-driving procedure: Influencing factors on pile-driving noise and technical possibilities to comply with noise mitigation values'. Supported by the Federal Ministry for the Environment, Nature Conservation and Nuclear Safety (Bundesministerium für Umwelt, Naturschutz und nukleare Sicherheit (BMU)), FKZ UM16 881500. Commissioned and managed by the Federal Maritime and Hydrographic Agency (Bundesamt für Seeschifffahrt und Hydrographie (BSH)), Order No. 10036866. Edited by the itap GmbH.
- Bellmann, M.A., Kühler, R., Matuschek, R., Müller, M., Betke, K., Schuckenbrock, J., Gündert, S., Remmers, P. (2018). Noise mitigation for large foundations (Monopile L & XL) - Technical options for complying with noise limits, Noise mitigation for the construction of increasingly large offshore wind turbines, Berlin.
- Blix, A.S. and Folkow, L.P. (1995). Daily energy expenditure in free living minke whales. *Acta Physio. Scand.*, 153: 61-66.
- Bruns, B., Stein, P., Kuhn, C., Sychla, H., Gattermann, J. (2014). Hydro sound measurements during the installation of large diameter offshore piles using combinations of independent noise mitigation systems, Inter-Noise 2014, 16-19 November 2014, Melbourne, Australia.
- Carter, M.I.D., Boehme, L., Cronin, M.A., Duck, C.D., Grecian, W.J., Hastie, G.D., Jessopp, M., Matthiopoulos, J., McConnell, B.J., Miller, D.L., Morris, C.D., Moss, S.E.W., Thompson, D., Thompson, P.M. and Russell, D.J.F. (2022). Sympatric Seals, Satellite Tracking and Protected Areas: Habitat-Based Distribution Estimates for Conservation and Management. *Front. Mar. Sci.* 9:875869. doi: 10.3389/fmars.2022.875869.
- Defra (2025). Policy paper - Reducing marine noise. Published 21 January 2025. Available at: <https://www.gov.uk/government/publications/reducing-marine-noise/reducing-marine-noise>.
- Elmer, K.H. (2018). HSD: Effective offshore piling noise mitigation with big monopiles, Noise mitigation for the construction of increasingly large offshore wind turbines, Berlin.
- Hawkins, A.D., Roberts, L. and Cheesman, S. (2014) Responses of free-living coastal pelagic fish to impulsive sounds. *J. Acoust. Soc. Am.* 135(5), 3101-16. doi: 10.1121/1.4870697. PMID: 24926505.
- JNCC. (2010). 'Statutory nature conservation agency protocol for minimising the risk of injury to marine mammals from piling noise'. August 2010.
- JNCC, Natural England and Cefas. (2025). Position on the use of quieter piling methods and noise abatement systems when installing offshore wind turbine foundations. January 2025.

Koschinski, S. and Lüdemann, K. (2020). Noise mitigation for the construction of increasingly large offshore wind turbines. *Technical Options for Complying with Noise Limits*, p.40.

Kyle-Henney, M., Reach, I., Barr, N., Warner, I., Lowe, S., and Lloyd Jones, D. (2024). Identifying and Mapping Atlantic Herring Potential Spawning Habitat: An Updated Method Statement. Available online at

[Accessed April 2025].

Martin, S.B. and Barclay, D.R. (2019). Determining the dependence of marine pile driving sound levels on strike energy, pile penetration, and propagation effects using a linear mixed model based on damped cylindrical spreading. *The Journal of the Acoustical Society of America*, 146(1), pp.109-121.

Morecambe Offshore Windfarm (2025). [EN010121-001000-Flotation Energy - Any other updated documents, including the Guide to the Application, and statements from the Applicant deemed necessary following responses at Deadline 3 \(if required\) 27.pdf](#)

Otani, S., Naito, T., Kato, A. & Kawamura, A. (2000). Diving behaviour and swimming speed of a free-ranging harbour porpoise (*Phocoena phocoena*). *Marine Mammal Science*, Volume 16, Issue 4, pp 811-814, October 2000.

Popper A N, Hawkins A D, Fay R R, Mann D A, Bartol S, Carlson T J, Coombs S, Ellison W T, Gentry R L, Halvorsen M B, Løkkeborg S, Rogers P H, Southall B L, Zeddies D G, Tavolga W N (2014). *Sound exposure guidelines for Fishes and Sea Turtles*. Springer Briefs in Oceanography, DOI 10.1007/978-3-319-06659-2.

Robinson, S. P., Lepper, P. A., and Ablitt, J. (2007). "The measurement of the underwater radiated noise from marine piling including characterisation of a 'soft start' period," in *Oceans 2007-Europe* (IEEE, Aberdeen, UK), pp. 732–737.

Southall B L, Finneran J J, Reichmuth C, Nachtigall P E, Ketten D R, Bowles A E, Ellison W T, Nowacek D P, Tyack P L. (2019). *Marine mammal noise exposure criteria: Updated scientific recommendations for residual hearing effects*. *Aquatic Mammals* 2019, 45 (20, 125-232) DOI 10.1578/AM.45.2.2019.125.

Verfuss, U. K., Sparling, C. E., Arnot, C., Judd, A. & Coyle, M. (2016). Review of Offshore Wind Farm Impact Monitoring and Mitigation with Regard to Marine Mammals. In: Popper, N. 68 A. & Hawkins, A. (eds.) *The Effects of Noise on Aquatic Life II*. New York, NY: Springer New York

Verfuss, U.K., Sinclair, R.R. & Sparling, C.E. (2019). A review of noise abatement systems for offshore wind farm construction noise, and the potential for their application in Scottish waters. *Scottish Natural Heritage Research Report No. 1070*.

# Appendix A – Underwater Noise Modelling

## Mitigated noise levels

1. The Dogger Bank South (DBS) Offshore Windfarm Projects are located in the North Sea more than 100km off the northeast coast of England and consist of two adjacent sites, DBS East and DBS West. As part of the Environmental Impact Assessment (EIA), Subacoustech Environmental Ltd. have undertaken detailed modelling and analysis in relation to the effect of underwater noise on marine mammals and fish at the sites (**Appendix 11-3 Underwater Noise Modelling Report (Revision 2) [AS-137]**).
2. In addition, there is a possibility that impact piling will occur with mitigation measures in place. The exact mitigation to be used has not been confirmed, but a flat, broadband, 10 dB reduction in source level has been used to reflect a generic noise attenuation. A 10 dB reduction gives a conservative estimate for most types of mitigation that could be considered, as derived from data presented in Verfuss *et al.* (2019). In this paper, as an example, data for the Big Bubble Curtain (BBC), a commonly deployed noise mitigation method, show that it provides a minimum of 10dB attenuation in the frequency bands where marine mammals are most sensitive (i.e., 250 Hz and above). In a comprehensive review of pile driving with and without noise mitigation, Bellman *et al.* (2020) found that, where it was deployed in depths of 30 m or shallower, an attenuation of 10 dB was commonly achieved by a single BBC. There are many ways that noise levels can be reduced including through development of the foundation design, and the methodology to provide attenuation of this order, compared to the values in **Table A 1**, will be determined once the piling methodology is finalised.

**Table A 1 Summary of the unweighted apparent source levels used for modelling**

| Source levels             | Location              | Monopile foundation<br>15 m / 6,000 kJ | Multi-leg foundation<br>4 m / 3,000 kJ |
|---------------------------|-----------------------|----------------------------------------|----------------------------------------|
| Unwtd SPL <sub>peak</sub> | DBS East: S location  | 243.0 dB re 1 µPa @ 1m                 | 241.7 dB re 1 µPa@ 1m                  |
|                           | DBS East: NW location | 243.0 dB re 1 µPa@ 1m                  | 241.5 dB re 1 µPa@ 1m                  |
|                           | DBS West: NE location | 243.0 dB re 1 µPa@ 1m                  | 241.6 dB re 1 µPa@ 1m                  |
|                           | DBS West: W location  | 243.0 dB re 1 µPa@ 1m                  | 241.7 dB re 1 µPa@ 1m                  |
| Unwtd SEL <sub>ss</sub>   | DBS East: S location  | 224.2 dB re 1 µPa <sup>2</sup> s@ 1m   | 222.5 dB re 1 µPa <sup>2</sup> s@ 1m   |
|                           | DBS East: NW location | 224.2 dB re 1 µPa <sup>2</sup> s@ 1m   | 222.2 dB re 1 µPa <sup>2</sup> s@ 1m   |
|                           | DBS West: NE location | 224.2 dB re 1 µPa <sup>2</sup> s@ 1m   | 222.3 dB re 1 µPa <sup>2</sup> s@ 1m   |



| Source levels | Location             | Monopile foundation<br>15 m / 6,000 kJ      | Multi-leg foundation<br>4 m / 3,000 kJ      |
|---------------|----------------------|---------------------------------------------|---------------------------------------------|
|               | DBS West: W location | 224.2 dB re 1 $\mu\text{Pa}^2\text{s}$ @ 1m | 222.5 dB re 1 $\mu\text{Pa}^2\text{s}$ @ 1m |

## Mitigated impact piling

- Table A 2 to Table A 19 present the modelling results for the monopile foundation scenarios at two separate locations using a 10 dB reduction in source level to represent generic mitigation measures, as discussed above. Separate results have been considered for a single pile installation and multiple piles installed sequentially at the same location, four in the case of multi-leg foundations.
- The addition of the mitigation measures brings the maximum Southall *et al.* (2019) impact ranges for marine mammals down from 18km at the DBS West: W location for LF cetaceans, to 1.6km. For fish, recoverably injury (203 dB SEL<sub>cum</sub> threshold) impact ranges are reduced from 8.6km to 2.3km for a stationary receptor and 680m to less than 100m for a fleeing receptor.

## DBS East: S location

Table A 2 Summary of the mitigated (-10 dB) unweighted SPL<sub>peak</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation modelling at the DBS East: S location for the first pile strike

| Southall <i>et al.</i> (2019)<br>Unweighted SPL <sub>peak</sub> |              | Monopile foundation, first strike (mitigated) |               |               |            |
|-----------------------------------------------------------------|--------------|-----------------------------------------------|---------------|---------------|------------|
|                                                                 |              | Area                                          | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Impulsive)                                       | LF (219 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (230 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (202 dB) | 0.01km <sup>2</sup>                           | 70m           | 70m           | 70m        |
|                                                                 | PCW (218 dB) | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
| <b>TTS</b><br>(Impulsive)                                       | LF (213 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (224 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (196 dB) | 0.09km <sup>2</sup>                           | 180m          | 170m          | 170m       |
|                                                                 | PCW (212 dB) | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |

**Table A 3 Summary of the mitigated (-10 dB) unweighted SPL<sub>peak</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation modelling at the DBS East: S location for the maximum hammer energy**

| Southall <i>et al.</i> (2019)<br>Unweighted SPL <sub>peak</sub> |              | Monopile foundation, maximum energy (mitigated) |               |               |            |
|-----------------------------------------------------------------|--------------|-------------------------------------------------|---------------|---------------|------------|
|                                                                 |              | Area                                            | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Impulsive)                                       | LF (219 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (230 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (202 dB) | 0.07km <sup>2</sup>                             | 150m          | 150m          | 150m       |
|                                                                 | PCW (218 dB) | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
| <b>TTS</b><br>(Impulsive)                                       | LF (213 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (224 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (196 dB) | 0.48km <sup>2</sup>                             | 390m          | 390m          | 390m       |
|                                                                 | PCW (212 dB) | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |

**Table A 4 Summary of the mitigated (-10 dB) weighted SEL<sub>cum</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation (single pile installation) modelling at the DBS East: S location assuming a fleeing animal**

| Southall <i>et al.</i> (2019)<br>Weighted SEL <sub>cum</sub> |              | Monopile foundation, single pile (mitigated) |               |               |            |
|--------------------------------------------------------------|--------------|----------------------------------------------|---------------|---------------|------------|
|                                                              |              | Area                                         | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Impulsive)                                    | LF (183 dB)  | 4.6km <sup>2</sup>                           | 1.6km         | 830m          | 1.2km      |
|                                                              | HF (185 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (155 dB) | 2.4km <sup>2</sup>                           | 980m          | 780m          | 870m       |
|                                                              | PCW (185 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Impulsive)                                    | LF (168 dB)  | 1,600km <sup>2</sup>                         | 32km          | 12km          | 22km       |
|                                                              | HF (170 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (140 dB) | 750km <sup>2</sup>                           | 20km          | 11km          | 15km       |
|                                                              | PCW (170 dB) | 96km <sup>2</sup>                            | 6.3km         | 4.8km         | 5.5km      |

Table A 5 Summary of the mitigated (-10 dB) weighted  $SEL_{cum}$  impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation (2 piles installed per 24 hours) modelling at the DBS East: S location assuming a fleeing animal

| Southall <i>et al.</i> (2019)<br>Weighted $SEL_{cum}$ |              | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|-------------------------------------------------------|--------------|-----------------------------------------------------|---------------|---------------|------------|
|                                                       |              | Area                                                | Maximum range | Minimum range | Mean range |
| PTS<br>(Impulsive)                                    | LF (183 dB)  | 4.6km <sup>2</sup>                                  | 1.6km         | 830m          | 1.2km      |
|                                                       | HF (185 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | VHF (155 dB) | 2.4km <sup>2</sup>                                  | 980m          | 780m          | 880m       |
|                                                       | PCW (185 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
| TTS<br>(Impulsive)                                    | LF (168 dB)  | 1,600km <sup>2</sup>                                | 32km          | 12km          | 22km       |
|                                                       | HF (170 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | VHF (140 dB) | 780km <sup>2</sup>                                  | 20km          | 11km          | 16km       |
|                                                       | PCW (170 dB) | 100km <sup>2</sup>                                  | 6.6km         | 4.8km         | 5.7km      |

Table A 6 Summary of the mitigated (-10 dB) unweighted  $SPL_{peak}$  impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation modelling at the DBS East: S location for the first pile strike

| Popper <i>et al.</i> (2014)<br>Unweighted $SPL_{peak}$ |  | Monopile foundation, first strike (mitigated) |               |               |            |
|--------------------------------------------------------|--|-----------------------------------------------|---------------|---------------|------------|
|                                                        |  | Area                                          | Maximum range | Minimum range | Mean range |
| 213 dB                                                 |  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
| 207 dB                                                 |  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |

Table A 7 Summary of the mitigated (-10 dB) unweighted  $SPL_{peak}$  impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation modelling at the DBS East: S location for the maximum hammer energy

| Popper <i>et al.</i> (2014)<br>Unweighted $SPL_{peak}$ |  | Monopile foundation, maximum hammer energy (mitigated) |               |               |            |
|--------------------------------------------------------|--|--------------------------------------------------------|---------------|---------------|------------|
|                                                        |  | Area                                                   | Maximum range | Minimum range | Mean range |
| 213 dB                                                 |  | < 0.01km <sup>2</sup>                                  | < 50m         | < 50m         | < 50m      |
| 207 dB                                                 |  | 0.01km <sup>2</sup>                                    | 70m           | 70m           | 70m        |



Table A 8 Summary of the mitigated (-10 dB) unweighted SEL<sub>cum</sub> impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation (single pile installation) modelling at the DBS East: S location assuming both a fleeing and stationary animal

| Popper <i>et al.</i> (2014)<br>Unweighted SEL <sub>cum</sub> |        | Monopile foundation, single pile (mitigated) |               |               |            |
|--------------------------------------------------------------|--------|----------------------------------------------|---------------|---------------|------------|
|                                                              |        | Area                                         | Maximum range | Minimum range | Mean range |
| <b>Fleeing</b><br>(1.5 ms <sup>-1</sup> )                    | 219 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 216 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 210 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 207 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 203 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 186 dB | 120km <sup>2</sup>                           | 7.1km         | 5.2km         | 6.1km      |
| <b>Stationary</b>                                            | 219 dB | < 0.1km <sup>2</sup>                         | 150m          | 130m          | 140m       |
|                                                              | 216 dB | 0.1km <sup>2</sup>                           | 230m          | 200m          | 210m       |
|                                                              | 210 dB | 0.9km <sup>2</sup>                           | 550m          | 530m          | 540m       |
|                                                              | 207 dB | 2.2km <sup>2</sup>                           | 850m          | 830m          | 840m       |
|                                                              | 203 dB | 7.3km <sup>2</sup>                           | 1.6km         | 1.5km         | 1.5km      |
|                                                              | 186 dB | 560km <sup>2</sup>                           | 15km          | 12km          | 13km       |

Table A 9 Summary of the mitigated (-10 dB) unweighted SEL<sub>cum</sub> impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation (2 piles installed per 24 hours) modelling at the DBS East: S location assuming both a fleeing and stationary animal

| Popper <i>et al.</i> (2014)<br>Unweighted SEL <sub>cum</sub> |        | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|--------------------------------------------------------------|--------|-----------------------------------------------------|---------------|---------------|------------|
|                                                              |        | Area                                                | Maximum range | Minimum range | Mean range |
| <b>Fleeing</b><br>(1.5 ms <sup>-1</sup> )                    | 219 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 216 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 210 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 207 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 203 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 186 dB | 120km <sup>2</sup>                                  | 7.4km         | 5.2km         | 6.2km      |
| <b>Stationary</b><br>(0 m/s)                                 | 219 dB | 0.1km <sup>2</sup>                                  | 230m          | 200m          | 210m       |
|                                                              | 216 dB | 0.4km <sup>2</sup>                                  | 350m          | 330m          | 340m       |
|                                                              | 210 dB | 2.2km <sup>2</sup>                                  | 850m          | 830m          | 840m       |
|                                                              | 207 dB | 5.4km <sup>2</sup>                                  | 1.4km         | 1.3km         | 1.3km      |

| Popper <i>et al.</i> (2014)   |        | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|-------------------------------|--------|-----------------------------------------------------|---------------|---------------|------------|
| Unweighted SEL <sub>cum</sub> |        | Area                                                | Maximum range | Minimum range | Mean range |
|                               | 203 dB | 18km <sup>2</sup>                                   | 2.4km         | 2.4km         | 2.4km      |
|                               | 186 dB | 950km <sup>2</sup>                                  | 20km          | 14km          | 17km       |

Table A 10 Summary of the mitigated (-10 dB) and unmitigated unweighted SEL<sub>ss</sub> impact ranges for fish using the Hawkins *et al.* (2014) 135dB criteria for the monopile foundation modelling at the DBS East: S location for the first pile strike assuming a stationary animal

| Hawkins <i>et al.</i> (2014) |                          | Monopile foundation, first strike |               |               |            |
|------------------------------|--------------------------|-----------------------------------|---------------|---------------|------------|
| Unweighted SEL <sub>ss</sub> |                          | Area                              | Maximum range | Minimum range | Mean range |
|                              | 135 dB mitigated (-10dB) | 3,100km <sup>2</sup>              | 41,000m       | 20,000m       | 31,000m    |
|                              | 135dB unmitigated        | 9,200                             | 75,000m       | 30,000m       | 52,000m    |

Table A 11 Summary of the mitigated (-10 dB) and unmitigated unweighted SEL<sub>ss</sub> impact ranges for fish using the Hawkins *et al.* (2014) 135dB criteria for the monopile foundation modelling at the DBS East: S location for the maximum hammer energy assuming a stationary animal

| Hawkins <i>et al.</i> (2014) |                          | Monopile foundation, maximum hammer energy |               |               |            |
|------------------------------|--------------------------|--------------------------------------------|---------------|---------------|------------|
| Unweighted SEL <sub>ss</sub> |                          | Area                                       | Maximum range | Minimum range | Mean range |
|                              | 135 dB mitigated (-10dB) | 6,000km <sup>2</sup>                       | 59,000m       | 25,000m       | 42,000m    |
|                              | 135dB unmitigated        | 15,000km <sup>2</sup>                      | 61,000m       | 26,000m       | 43,000m    |

## DBS West: W location

Table A 12 Summary of the mitigated (-10 dB) unweighted SPL<sub>peak</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation modelling at the DBS West: W location for the first pile strike

| Southall <i>et al.</i> (2019)  |              | Monopile foundation, first strike (mitigated) |               |               |            |
|--------------------------------|--------------|-----------------------------------------------|---------------|---------------|------------|
| Unweighted SPL <sub>peak</sub> |              | Area                                          | Maximum range | Minimum range | Mean range |
| PTS<br>(Impulsive)             | LF (219 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                | HF (230 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                | VHF (202 dB) | 0.01km <sup>2</sup>                           | 70m           | 70m           | 70m        |
|                                | PCW (218 dB) | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |

| Southall <i>et al.</i> (2019)<br>Unweighted SPL <sub>peak</sub> |              | Monopile foundation, first strike (mitigated) |               |               |            |
|-----------------------------------------------------------------|--------------|-----------------------------------------------|---------------|---------------|------------|
|                                                                 |              | Area                                          | Maximum range | Minimum range | Mean range |
| <b>TTS</b><br>(Impulsive)                                       | LF (213 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (224 dB)  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (196 dB) | 0.09km <sup>2</sup>                           | 170m          | 170m          | 170m       |
|                                                                 | PCW (212 dB) | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |

Table A 13 Summary of the mitigated (-10 dB) unweighted SPL<sub>peak</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation modelling at the DBS West: W location for the maximum hammer energy

| Southall <i>et al.</i> (2019)<br>Unweighted SPL <sub>peak</sub> |              | Monopile foundation, maximum energy (mitigated) |               |               |            |
|-----------------------------------------------------------------|--------------|-------------------------------------------------|---------------|---------------|------------|
|                                                                 |              | Area                                            | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Impulsive)                                       | LF (219 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (230 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (202 dB) | 0.07km <sup>2</sup>                             | 150m          | 150m          | 150m       |
|                                                                 | PCW (218 dB) | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
| <b>TTS</b><br>(Impulsive)                                       | LF (213 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | HF (224 dB)  | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |
|                                                                 | VHF (196 dB) | 0.45km <sup>2</sup>                             | 380m          | 380m          | 380m       |
|                                                                 | PCW (212 dB) | < 0.01km <sup>2</sup>                           | < 50m         | < 50m         | < 50m      |

Table A 14 Summary of the mitigated weighted SEL<sub>cum</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation (single pile installation) modelling at the DBS West: W location assuming a fleeing animal

| Southall <i>et al.</i> (2019)<br>Weighted SEL <sub>cum</sub> |              | Monopile foundation, single pile (mitigated) |               |               |            |
|--------------------------------------------------------------|--------------|----------------------------------------------|---------------|---------------|------------|
|                                                              |              | Area                                         | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Impulsive)                                    | LF (183 dB)  | 2.5km <sup>2</sup>                           | 1.1km         | 550m          | 870m       |
|                                                              | HF (185 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (155 dB) | 1.8km <sup>2</sup>                           | 830m          | 680m          | 750m       |



| Southall <i>et al.</i> (2019)<br>Weighted SEL <sub>cum</sub> |              | Monopile foundation, single pile (mitigated) |               |               |            |
|--------------------------------------------------------------|--------------|----------------------------------------------|---------------|---------------|------------|
|                                                              |              | Area                                         | Maximum range | Minimum range | Mean range |
|                                                              | PCW (185 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Impulsive)                                    | LF (168 dB)  | 1,500km <sup>2</sup>                         | 31km          | 14km          | 21km       |
|                                                              | HF (170 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (140 dB) | 640km <sup>2</sup>                           | 17km          | 11km          | 14km       |
|                                                              | PCW (170 dB) | 73km <sup>2</sup>                            | 5.3km         | 4.1km         | 4.8km      |

Table A 15 Summary of the mitigated weighted SEL<sub>cum</sub> impact ranges for marine mammals using the Southall *et al.* (2019) impulsive criteria for the monopile foundation (2 piles installed per 24 hours) modelling at the DBS West: W location assuming a fleeing animal

| Southall <i>et al.</i> (2019)<br>Weighted SEL <sub>cum</sub> |              | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|--------------------------------------------------------------|--------------|-----------------------------------------------------|---------------|---------------|------------|
|                                                              |              | Area                                                | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Impulsive)                                    | LF (183 dB)  | 2.5km <sup>2</sup>                                  | 1.1km         | 550m          | 880m       |
|                                                              | HF (185 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (155 dB) | 1.8km <sup>2</sup>                                  | 830m          | 680m          | 760m       |
|                                                              | PCW (185 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Impulsive)                                    | LF (168 dB)  | 1,600km <sup>2</sup>                                | 31km          | 14km          | 22km       |
|                                                              | HF (170 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (140 dB) | 680km <sup>2</sup>                                  | 18km          | 11km          | 15km       |
|                                                              | PCW (170 dB) | 77km <sup>2</sup>                                   | 5.6km         | 4.1km         | 4.9km      |

Table A 16 Summary of the mitigated unweighted SPL<sub>peak</sub> impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation modelling at the DBS West: W location for the first pile strike

| Popper <i>et al.</i> (2014)<br>Unweighted SPL <sub>peak</sub> |  | Monopile foundation, first strike (mitigated) |               |               |            |
|---------------------------------------------------------------|--|-----------------------------------------------|---------------|---------------|------------|
|                                                               |  | Area                                          | Maximum range | Minimum range | Mean range |
| 213 dB                                                        |  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |
| 207 dB                                                        |  | < 0.01km <sup>2</sup>                         | < 50m         | < 50m         | < 50m      |

Table A 17 Summary of the mitigated unweighted SPL<sub>peak</sub> impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation modelling at the DBS West: W location for the maximum hammer energy

| Popper <i>et al.</i> (2014)<br>Unweighted SPL <sub>peak</sub> | Monopile foundation, maximum hammer energy (mitigated) |               |               |            |
|---------------------------------------------------------------|--------------------------------------------------------|---------------|---------------|------------|
|                                                               | Area                                                   | Maximum range | Minimum range | Mean range |
| 213 dB                                                        | < 0.01km <sup>2</sup>                                  | < 50m         | < 50m         | < 50m      |
| 207 dB                                                        | 0.01km <sup>2</sup>                                    | 70m           | 70m           | 70m        |

Table A 18 Summary of the mitigated unweighted SEL<sub>cum</sub> impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation (single pile installation) modelling at the DBS West: W location assuming both a fleeing and stationary animal

| Popper <i>et al.</i> (2014)<br>Unweighted SEL <sub>cum</sub> |        | Monopile foundation, single pile (mitigated) |               |               |            |
|--------------------------------------------------------------|--------|----------------------------------------------|---------------|---------------|------------|
|                                                              |        | Area                                         | Maximum range | Minimum range | Mean range |
| <b>Fleeing</b><br>(1.5 ms <sup>-1</sup> )                    | 219 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 216 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 210 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 207 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 203 dB | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | 186 dB | 91km <sup>2</sup>                            | 6.1km         | 4.4km         | 5.4km      |
| <b>Stationary</b>                                            | 219 dB | < 0.1km <sup>2</sup>                         | 150m          | 130m          | 140m       |
|                                                              | 216 dB | 0.1km <sup>2</sup>                           | 230m          | 200m          | 210m       |
|                                                              | 210 dB | 0.8km <sup>2</sup>                           | 530m          | 500m          | 510m       |
|                                                              | 207 dB | 2.1km <sup>2</sup>                           | 830m          | 800m          | 810m       |
|                                                              | 203 dB | 6.8km <sup>2</sup>                           | 1.5km         | 1.5km         | 1.5km      |
|                                                              | 186 dB | 470km <sup>2</sup>                           | 13km          | 11km          | 12km       |

Table A 19 Summary of the mitigated unweighted SEL<sub>cum</sub> impact ranges for fish using the Popper *et al.* (2014) pile driving criteria for the monopile foundation (2 piles installed per 24 hours) modelling at the DBS West: W location assuming both a fleeing and stationary animal

| Popper <i>et al.</i> (2014)<br>Unweighted SEL <sub>cum</sub> |        | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|--------------------------------------------------------------|--------|-----------------------------------------------------|---------------|---------------|------------|
|                                                              |        | Area                                                | Maximum range | Minimum range | Mean range |
| <b>Fleeing</b><br>(1.5 ms <sup>-1</sup> )                    | 219 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 216 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 210 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |

| Popper <i>et al.</i> (2014)<br>Unweighted SEL <sub>cum</sub> |        | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|--------------------------------------------------------------|--------|-----------------------------------------------------|---------------|---------------|------------|
|                                                              |        | Area                                                | Maximum range | Minimum range | Mean range |
| Stationary<br>(0 m/s)                                        | 207 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 203 dB | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                              | 186 dB | 96km <sup>2</sup>                                   | 9.6km         | 4.5km         | 5.5km      |
|                                                              | 219 dB | 0.1km <sup>2</sup>                                  | 230m          | 200m          | 210m       |
|                                                              | 216 dB | 0.4km <sup>2</sup>                                  | 350m          | 330m          | 340m       |
|                                                              | 210 dB | 2.1km <sup>2</sup>                                  | 830m          | 800m          | 810m       |
|                                                              | 207 dB | 5.1km <sup>2</sup>                                  | 1.3km         | 1.3km         | 1.3km      |
|                                                              | 203 dB | 16km <sup>2</sup>                                   | 2.3km         | 2.2km         | 2.3km      |
|                                                              | 186 dB | 810km <sup>2</sup>                                  | 18km          | 14km          | 16km       |

Table A 20 Summary of the mitigated (-10 dB) and mitigated unweighted SEL<sub>ss</sub> impact ranges for fish using the Hawkins *et al.* (2014) 135dB criteria for the monopile foundation modelling at the DBS West:W location for the first pile strike assuming a stationary animal

| Hawkins <i>et al.</i> (2014)<br>Unweighted SEL <sub>ss</sub> |  | Monopile foundation, first strike (mitigated) |               |               |            |
|--------------------------------------------------------------|--|-----------------------------------------------|---------------|---------------|------------|
|                                                              |  | Area                                          | Maximum range | Minimum range | Mean range |
| 135 dB mitigated (-10dB)                                     |  | 3,000km <sup>2</sup>                          | 39,000m       | 23,000m       | 30,000m    |
| 135dB unmitigated                                            |  | 11,000km <sup>2</sup>                         | 81,000m       | 34,000m       | 56,000m    |

Table A 21 Summary of the mitigated (-10 dB) and mitigated unweighted SEL<sub>ss</sub> impact ranges for fish using the Hawkins *et al.* (2014) 135dB criteria for the monopile foundation modelling at the DBS West:W location for the maximum hammer energy assuming a stationary animal

| Hawkins <i>et al.</i> (2014)<br>Unweighted SEL <sub>ss</sub> |  | Monopile foundation, maximum hammer energy |               |               |            |
|--------------------------------------------------------------|--|--------------------------------------------|---------------|---------------|------------|
|                                                              |  | Area                                       | Maximum range | Minimum range | Mean range |
| 135 dB mitigated (-10dB)                                     |  | 6,300km <sup>2</sup>                       | 61,000m       | 28,000m       | 44,000m    |
| 135dB unmitigated                                            |  | 19,000km <sup>2</sup>                      | 109,000m      | 40,000m       | 74,000m    |



## Non-impulsive criteria

5. Following from the Southall *et al.* (2019) modelled impact ranges presented in Mitigated impact piling section, the modelling results for the non-impulsive criteria from impact piling noise at DBS, as discussed in section 2.2.1 of **Appendix 11-3 Underwater Noise Modelling Report (Revision 2)** [AS-137], are presented below. The predicted ranges here fall well below the impulsive criteria previously presented.
6. **Table A 22** to **Table A 25** expand on the results presented above for the mitigated impact piling scenarios, covering the non-impulsive criteria from Southall *et al.* (2019) for marine mammals.

**Table A 22 Summary of the mitigated weighted SEL<sub>cum</sub> impact ranges for marine mammals using the Southall *et al.* (2019) non-impulsive criteria for the monopile foundation (single pile installation) modelling at the DBS East: S location assuming a fleeing animal**

| Southall <i>et al.</i> (2019)<br>Weighted SEL <sub>cum</sub> |              | Monopile foundation, single pile (mitigated) |               |               |            |
|--------------------------------------------------------------|--------------|----------------------------------------------|---------------|---------------|------------|
|                                                              |              | Area                                         | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Non-impulsive)                                | LF (199 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | HF (198 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (173 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | PCW (201 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Non-impulsive)                                | LF (179 dB)  | 77km <sup>2</sup>                            | 6.2km         | 3.6km         | 4.9km      |
|                                                              | HF (178 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                              | VHF (153 dB) | 10km <sup>2</sup>                            | 2.0km         | 1.7km         | 1.8km      |
|                                                              | PCW (181 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |

Table A 23 Summary of the mitigated weighted  $SEL_{cum}$  impact ranges for marine mammals using the Southall *et al.* (2019) non-impulsive criteria for the monopile foundation (2 piles installed per 24 hours) modelling at the DBS East: S location assuming a fleeing animal

| Southall <i>et al.</i> (2019)<br>Weighted $SEL_{cum}$ |              | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|-------------------------------------------------------|--------------|-----------------------------------------------------|---------------|---------------|------------|
|                                                       |              | Area                                                | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Non-impulsive)                         | LF (199 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | HF (198 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | VHF (173 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | PCW (201 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Non-impulsive)                         | LF (179 dB)  | 78km <sup>2</sup>                                   | 6.2km         | 3.6km         | 4.9km      |
|                                                       | HF (178 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | VHF (153 dB) | 10km <sup>2</sup>                                   | 2.0km         | 1.7km         | 1.8km      |
|                                                       | PCW (181 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |

Table A 24 Summary of the mitigated weighted  $SEL_{cum}$  impact ranges for marine mammals using the Southall *et al.* (2019) non-impulsive criteria for the monopile foundation (single pile installation) modelling at the DBS West: W location assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted $SEL_{cum}$ |              | Monopile foundation, single pile (mitigated) |               |               |            |
|----------------------------------------------------|--------------|----------------------------------------------|---------------|---------------|------------|
|                                                    |              | Area                                         | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Non-impulsive)                      | LF (199 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                    | HF (198 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                    | VHF (173 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                    | PCW (201 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Non-impulsive)                      | LF (179 dB)  | 55km <sup>2</sup>                            | 5.0km         | 3.1km         | 4.1km      |
|                                                    | HF (178 dB)  | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |
|                                                    | VHF (153 dB) | 8.2km <sup>2</sup>                           | 1.7km         | 1.5km         | 1.6km      |
|                                                    | PCW (181 dB) | < 0.1km <sup>2</sup>                         | < 100m        | < 100m        | < 100m     |

Table A 25 Summary of the mitigated weighted  $SEL_{cum}$  impact ranges for marine mammals using the Southall *et al.* (2019) non-impulsive criteria for the monopile foundation (2 piles installed per 24 hours) modelling at the DBS West: W location assuming a fleeing animal

| Southall <i>et al.</i><br>(2019) Weighted $SEL_{cum}$ |              | Monopile foundation, 2 sequential piles (mitigated) |               |               |            |
|-------------------------------------------------------|--------------|-----------------------------------------------------|---------------|---------------|------------|
|                                                       |              | Area                                                | Maximum range | Minimum range | Mean range |
| <b>PTS</b><br>(Non-impulsive)                         | LF (199 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | HF (198 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | VHF (173 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | PCW (201 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
| <b>TTS</b><br>(Non-impulsive)                         | LF (179 dB)  | 55km <sup>2</sup>                                   | 5.0km         | 3.1km         | 4.1km      |
|                                                       | HF (178 dB)  | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |
|                                                       | VHF (153 dB) | 8.4km <sup>2</sup>                                  | 1.8km         | 1.5km         | 1.6km      |
|                                                       | PCW (181 dB) | < 0.1km <sup>2</sup>                                | < 100m        | < 100m        | < 100m     |

## References

Bellman, M., May, A., Wendt, T., Gerlach, S., Remmers, P., Brinkmann, J. (2020). Underwater noise during percussive pile-driving noise and technical possibilities to comply with noise mitigation values. Report by Institute of Technical and Applied Physics (itap) GmbH. Report for German Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB).

Southall, B. L., Finneran, J. J., Reichmuth, C., Nachtigall, P. E., Ketten, D. R., Bowles, A. E., Ellison, W. T., Nowacek, D. P., Tyack, P. L. (2019). Marine mammal noise exposure criteria: Updated scientific recommendations for residual hearing effects. *Aquatic Mammals* 2019, 45 (20, 125-232) DOI 10.1578/AM.45.2.2019.125.

Verfuss, U. K., Sinclair, R. R., Sparling, C. E. (2019). A review of noise abatement systems for offshore wind farm construction noise, and the potential for their application in Scottish waters. Scottish Natural Heritage Research Report No. 1070.



RWE Renewables UK Dogger Bank  
South (West) Limited

RWE Renewables UK Dogger Bank  
South (East) Limited

Windmill Business Park  
Whitehill Way  
Swindon  
Wiltshire, SN5 6PB

**RWE**

MASDAR 