

SUNNICA ENERGY FARM

EN010106

Environmental Statement

Volume 6

6.7 Biodiversity Net Gain Assessment

APFP Regulation 5(2)(a)

Planning Act 2008

Infrastructure Planning (Applications: Prescribed Forms and
Procedure) Regulations 2009



Planning Act 2008

**The Infrastructure Planning
(Applications: Prescribed Forms and
Procedure) Regulations 2009**

Sunnica Energy Farm

**Environmental Statement
6.7 Biodiversity Net Gain Assessment**

Regulation Reference:	Regulation 5(2)(a)
Planning Inspectorate Scheme Reference	EN010106
Application Document Reference	EN010106/APP/6.7
Author	Sunnica Energy Farm Project Team

Version	Date	Status of Version
Rev 00	19 November 2021	Application Version
Rev 01	01 September 2022	Update to river metric 3.1
Rev 02	11 January 2023	Updated to new Order Limits
Rev 03	30 January 2023	Annex D inserted
Rev 04	01 March 2023	Updated to address stakeholder comments
Rev 05	24 March 2023	Updated to address stakeholder comments

Table of contents

Chapter	Pages
1 Introduction	3
1.2 Supporting Documents	3
1.3 The Scheme	3
1.4 Site description	5
2 Relevant Legislation and Policy for BNG	6
3 Methods	9
3.2 Biodiversity Metric 3.1	9
3.3 Baseline Data	9
3.4 River Habitats	10
3.5 Post-development Data	11
3.6 Strategic Significance	11
3.7 Assumptions and limitations	11
4 Results	14
4.1 On-site baseline habitats	14
4.2 On-site biodiversity value	19
4.3 On-site Post-development Retained Habitats	24
4.4 On-site Post-development Created and Enhanced Habitats	29
4.5 Summary of Results	32
5 Conclusions	34
6 References	35
Appendix A Order Limits	36
Appendix B Phase 1 Habitat Plan	37
Appendix C Post Development Biodiversity Net Gain Plans	38
Appendix D Natural England's Biodiversity Metric 3.1 Calculation	39

Table of Tables

Table 2-1: Relevant BNG sections within local policies	6
Table 4-1: Baseline area-based habitats	23
Table 4-2: Hedgerow baseline habitats.....	24
Table 4-3: River baseline habitats	26
Table 4-4: Retained on-site area-based habitats	29
Table 4-5: Retained on-site linear habitats (hedgerows and trees).....	30
Table 4-6: Retained on-site linear habitats (rivers)	32
Table 4-7: Created on-site area-based habitats.....	36



Table 4-8: Created hedgerow habitats.....37

Table 4-9: Created on-site river habitats.....37

Table 4-10: Enhanced on-site linear-based habitats (rivers).....37

Table 4-11: Biodiversity Metric 3.1 Calculation Tool Output39

1 Introduction

- 1.1.1 AECOM Ltd was commissioned by Sunnica Limited to undertake a Biodiversity Net Gain (BNG) assessment for Sunnica Energy Farm (hereafter referred to as the Scheme). This report has been prepared as part of the Development Consent Order (DCO) Application for the Scheme.
- 1.1.2 This BNG assessment has been undertaken using Defra's Biodiversity Metric 3.1 (Ref 1 and Ref 2) to quantify the overall effect of the Scheme on biodiversity and to be a factor in informing habitat design as part of the Scheme. The report sets out the results of the BNG assessment that have been updated following discussions with stakeholders. It also accounts for changes made to the Scheme, including the proposed changes submitted at Deadline 5 of the Examination. Relevant legislation and policy, pertinent to BNG are presented in Section 2, the method for the assessment is outlined in Section 3, the results in Section 4, and the conclusions are provided in Section 5.

1.2 Supporting Documents

- 1.2.1 The following documents have been used to inform the BNG assessment, reported in this document:
- a. **Chapter 8: Ecology and Nature Conservation** of the Environmental Statement [EN010106/APP/6.1];
 - b. **Appendix 10I Outline Landscape and Ecology Management Plan (OLEMP)** of the Environmental Statement [EN010106/APP/6.2];
 - c. **Works Plans** [EN010106/APP/2.2]
 - d. **Figure 3-1: Sunnica East Site A and B Parameter Plan** and **Figure 3-2: Sunnica West A and B Parameter Plan** of the Environmental Statement [EN010106/APP/6.3];
 - e. **Appendix 8B: Preliminary Ecological Appraisal report** of the Environmental Statement [EN010106/APP/6.2];
 - f. **Appendix 8C: Terrestrial habitats and flora report** of the Environmental Statement [EN010106/APP/6.2]; and
 - g. **Appendix 8E: Aquatic Ecology report** of the Environmental Statement [EN010106/APP/6.2].

1.3 The Scheme

- 1.3.1 The Scheme is a new solar energy farm proposal that will deliver electricity to the national electricity transmission network. Sunnica Limited is proposing to install ground mounted solar photovoltaic (PV) panel arrays to generate electrical energy from the sun and combine these with a Battery Energy Storage System (BESS) which will connect to Burwell National Grid Substation in Cambridgeshire.
- 1.3.2 Electricity will be generated at Sunnica East Site A, near Isleham in Cambridgeshire; Sunnica East Site B, near Worlington and Freckenham in Suffolk; and Sunnica West Site A near Chippenham and Kennett in

Cambridgeshire. All locations will comprise ground mounted solar PV panel arrays, supporting electrical infrastructure and a BESS.

- 1.3.3 Supporting electrical infrastructure will include on-site substations on Sunnica East Site A and Sunnica East Site B and Sunnica West Site A, and on-site cabling between the different electrical elements across the Scheme. The generating equipment of the Scheme will be fenced and protected via security measures such as Closed-Circuit Television. Inside the fenced areas, in addition to the generating equipment will be, internal access tracks, and drainage. It is not proposed for any area to be continuously lit.
- 1.3.4 Visual, ecological, and archaeological mitigation is proposed which includes proposed grassland planting and new woodland; retention of existing woodland, wetlands, and other vegetation; provision of replacement habitat; and offsetting areas, where there will be no development. The BESS' will consist of a compound and battery array to allow for the importation, storage, and exportation of energy to the National Grid. There will also be areas at Sunnica East Site A and Sunnica East Site B for office and storage facilities for use during the Scheme's operation.
- 1.3.5 The Scheme will be connected to the existing Burwell National Grid Substation, using cables buried underground, of 400 kilovolt (kV) capacity. The cables will run between Sunnica East Site A, Sunnica East Site B and Sunnica West Site A (Grid Connection Route A), and then from Sunnica West Site A onwards to the Burwell National Grid Substation (Grid Connection Route B).
- 1.3.6 The Scheme will have two main access points, one north of Elms Road at Sunnica East Site B and one south of La Hogue Road at Sunnica West Site A. The main access route to Sunnica West Site A will be via the Chippenham junction of the A11, to the north of junction 38 of the A14. Sunnica East Site B will be accessed via the A11 and B1085. A number of secondary access points are proposed to access the individual land parcels through construction, operation, and decommissioning phases.
- 1.3.7 The Scheme is defined as a Nationally Significant Infrastructure Project (NSIP) and will require a Development Consent Order (DCO) from the Secretary of State for Business, Energy, and Industrial Strategy (Secretary of State), due to its generating capacity exceeding 50 megawatts (MW).
- 1.3.8 The Scheme comprises the following key areas:
 - a. solar farm sites:
 - i. East Site A;
 - ii. East Site B; and
 - iii. West Site A
 - b. associated electrical infrastructure for connection to the national transmission system, and for the purposes of this BNG assessment, Grid Connection Routes A and B have each been split in to two sections which comprise:
 - i. Grid Connection Route A ('A1' – connecting East Site A with East Site B and then 'A2' connecting East Site B to West Site A); and

- ii. Grid Connection Route B ('B1' – connecting West Site A to the existing Burwell National Grid Substation.

1.3.9 **Figure 1** in Appendix A shows the locations of these key areas.

1.4 Site description

- 1.4.1 The area of the Order limits area is 1,057.57 ha and the land use dominated by arable fields. There are mature trees and hedges, small, wooded copses, ponds, rivers and ditches present within the Site. The surrounding habitat is also mainly arable with small areas of mature broadleaved woodland (plantation, semi-natural). There are individual and clusters of residential properties located within and adjacent to the Order Limits
- 1.4.2 Several Water Framework Directive (WFD) waterbodies are present within the Order limits area including the Kennett-Lee Brook, Lee Brook, River Snail (Soham Lode), New River and Burwell Lode. Intrusive works are to be undertaken on four ditches within the Order limits, including tributaries of the River Snail, River Lark and in the New River catchment.

2 Relevant Legislation and Policy for BNG

- 2.1.1 It is government policy that planning decisions should minimise impacts on and provide net gain for biodiversity (National Planning Policy Framework 2021). In addition, the Environment Act 2021 includes provisions to make biodiversity net gain (BNG) a mandatory requirement within the town and country planning system in England.
- 2.1.2 As a Nationally Significant Infrastructure Project (NSIP), the Scheme will require consent via a Development Consent Order (DCO) which is not currently subject to any mandatory biodiversity net gain requirements. It is however anticipated that secondary legislation mandating the need for NSIP's to provide a minimum of 10% net gain in biodiversity through development will become mandatory in the mid-2020s.
- 2.1.3 It is government policy that planning decisions should minimise impacts on and provide net gains for biodiversity (National Planning Policy Framework (NPPF) 2021) (Ref 3).
- 2.1.4 Paragraph 174, where specific to BNG, of the NPPF states that: *“planning policies and decisions should contribute to and enhance the natural and local environment by: protecting and enhancing valued landscapes, sites of biodiversity or geological value and soils (in a manner commensurate with their statutory status or identified quality in the development plan.... Minimising impacts on and providing net gains for biodiversity, including by establishing coherent ecological networks that are more resilient to current and future pressures”*.
- 2.1.5 Section 4.5 of the draft Overarching National Policy Statement for Energy (EN-1) states: *“Although achieving biodiversity net gain is not an obligation for projects under the Planning Act 2008, energy NSIP proposals should seek opportunities to contribute to and enhance the natural environment by providing net gains for biodiversity where possible”*.
- 2.1.6 Relevant policies and summary sections on BNG, taken from local policy documents, are presented in **Table 2-1**.

Table 2-1: Relevant BNG sections within local policies

Relevant Document	Relevant policies on BNG	Policy Summary on BNG
East Cambridgeshire District Council Local Plan Adopted April 2015 (Ref 4)	Policy ENV7: Biodiversity and Geology	<i>All development proposals will be required to:</i> <i>Protect the biodiversity and geological value of land and buildings and minimise harm to or loss of environmental features, such as trees, hedgerows, woodland, wetland and ponds.</i> <i>Provide appropriate mitigation measures, reinstatement or replacement of features and/ or compensatory work that will enhance or recreate habitats on or off site where harm to environmental features and habitat is unavoidable; and</i>

Relevant Document	Relevant policies on BNG	Policy Summary on BNG
		Maximise opportunities for creation, restoration, enhancement and connection of natural habitats as an integral part of development proposals.
East Cambridgeshire District Council Supplementary Planning Document Natural Environment September 2020 (Ref 5)	Policy SPD.NE6 Biodiversity Net Gain	<i>In addition to the provisions set out in the Local Plan, all development proposals should contribute to and enhance the natural and local environment by firstly avoiding impacts where possible, where avoidance isn't possible minimising impacts on biodiversity and providing measurable net gains for biodiversity. If and when a nationally mandated mechanism to secure 'net gains' is introduced, then the following policy will not be implemented. In the absence of any nationally mandated mechanism to secure such 'net gains', the following policy applies: All development proposals (except householder applications – see below) must provide clear and robust evidence setting out: (a) information about the steps taken, or to be taken, to avoid and minimise the adverse effect of the development on the biodiversity of the onsite habitat and any other habitat, (b) the pre-development biodiversity value of the onsite habitat based on an up to date survey and ideally using the Defra metric, (c) the post-development biodiversity value of the onsite habitat ideally using the Defra metric; and (d) the ongoing management strategy for any proposals. Proposals which do not demonstrate that the post-development biodiversity value of the onsite habitat will not significantly exceed the pre-development biodiversity value of the onsite habitat will be refused.</i>
East Cambridgeshire District Council: Biodiversity Net Gain: East Cambridgeshire November 2022 (Ref 6)	In late 2022 East Cambridgeshire District Council (ECDC) published "Biodiversity Net Gain: East Cambridgeshire". The document provides interim guidance on the application of BNG prior to it becoming mandatory. The guidance builds upon Net Gain policies set out in ECDC's 2020 Natural Environment SPD. The guidance sets out the approach ECDC expects developers to take to delivering BNG locally and establishes when the delivery of 10% BNG is expected and instances when developments will be exempt.	

Relevant Document	Relevant policies on BNG	Policy Summary on BNG
East Cambridgeshire District Council Supplementary Planning Documents Renewable Energy Development (Commercial Scale) October 2014 (Ref 7)	Section 5: Biodiversity and geology	<i>Biodiversity enhancement: Applicants for renewable energy development will be expected to provide robust evidence as part of their planning application to demonstrate that the proposal will result in a net biodiversity gain as outlined in the National Planning Policy Framework. Opportunities to create or improve existing biodiversity should form part of renewable energy proposals. Biodiversity enhancement can include habitat restoration, improved links between sites and the inclusion of new environmental features within the development. For example, there is the potential to create new grasslands and hedgerows on the area around solar panels. Where environmental features are removed appropriate compensation measures will be required by the District Council. Applicants should have regard to the best practice guidance for renewable energy developments and biodiversity enhancement measures which has been produced by Natural England, the RSPB and the Solar Trade Association.</i>
Forest Heath District Council Core Strategy Adopted 2010 (Ref 8)	Policy CS2: Natural Environment	<i>Areas of landscape, biodiversity and geodiversity interest and local distinctiveness within the District will be protected from harm and their restoration, enhancement and expansion will be encouraged and sought through a variety of measures.</i>
Forest Heath and St Edmundsbury Local Plan: Joint Development Management Policies Document (last updated February 2015) (Ref 9)	Policy DM12: Mitigation, Enhancement, Management and Monitoring of Biodiversity	<i>In addition to, or as part of the requirements of other policies in this Development Policy Document measures should be included, as necessary and where appropriate, in the design for all developments for the protection of biodiversity and the mitigation of any adverse impacts. Additionally, enhancement for biodiversity should be included in all proposals, commensurate with the scale of the development. For example, such enhancement could include watercourse improvements to benefit biodiversity and improve water quality, habitat creation, wildlife links (including as part of green or blue infrastructure) and building design which creates wildlife habitat (e.g., green roofs, bird and/or bat boxes).</i>
Fordham Neighbourhood Plan (made December 2018) (Ref 10)	Policy 8: Wildlife and Habitats	<i>Development proposals should, wherever possible, seek to enhance connectivity of green networks through the inclusion of strong landscaping schemes that include trees, shrubs, hedgerows, green roofs and green walls, for example.</i> <i>Wherever possible, development proposals should avoid the loss of wildlife habitats or natural features such as trees, hedgerows, watercourses or ponds. Where the loss of a feature is unavoidable, mitigation may be acceptable through the introduction of new features that will result in at least a neutral impact on the wildlife.</i> <i>Overall, a net gain in biodiversity should be achieved, demonstrated by appropriate evidence prepared by a suitably qualified person on behalf of the applicant.</i>

3 Methods

3.1.1 This report has been produced in accordance with the methods set out in the following guidance documents:

- a. Biodiversity Metric 3.1 User Guide (Ref 1); and
- b. Biodiversity Metric 3.1 – Technical Supplement (Ref 2).

3.1.2 Calculations for BNG within the following sections were made using the 'Biodiversity Metric 3.1 – Calculation Tool'.

3.2 Biodiversity Metric 3.1

3.2.1 A BNG assessment involves making a comparison between the biodiversity value of habitats present within the Order Limits prior to development (*i.e.*, the 'baseline') and the predicted biodiversity value of habitats following the completion of the development (*i.e.*, 'post-development'). The comparison is made in terms of 'biodiversity units', with a 'biodiversity metric' providing the mechanism to allow biodiversity values to be calculated and compared.

3.2.2 Biodiversity Metric 3.1 calculates the overall loss or gain of biodiversity of development projects by assessing the distinctiveness (*i.e.*, type of habitat and its value), condition, extent, and strategic significance of habitats on site pre- and post-development. To achieve biodiversity net gain, the biodiversity unit score must have a post-development score higher than the baseline score. When calculating the post-development biodiversity units, the metric includes a series of standard risk multipliers to account for the inherent risk of creating and restoring habitats, the time taken to establish habitats and the location of the mitigation in relation to the habitats lost on site. The risk multipliers have the effect of reducing the value of the proposed habitats, which means larger areas, habitats of higher distinctiveness, and/or condition are required to achieve net gain.

3.2.3 The metric assesses and generates separate outputs for area-based habitats (measured in habitat units) and linear based habitats, including hedgerows (measured in hedgerow units) and rivers (measured in river units).

3.2.4 The information required to undertake the calculation is described below.

3.3 Baseline Data

3.3.1 All baseline and post-development habitats within the Order Limits have been included within the calculation to provide the baseline and post-development biodiversity values.

3.3.2 Phase 1 habitat data collected in November 2018 and updated throughout 2019, 2020 and 2022 (hereafter referred to as the 'baseline') have been utilised to determine the extent of baseline area-based and linear habitats. All baseline habitats defined within the Order limits were assigned a condition, using criteria outlined in the Biodiversity Metric 3.1 – Technical Supplement (Ref 2).

3.3.3 The Baseline Phase 1 Habitat Map (Appendix A) was digitised in Geographic Information System (GIS) to provide area and length measurements of each

habitat type. The habitats recorded during the Phase 1 habitat survey (see **Appendix 8B: Preliminary Ecological Appraisal report** of the Environmental Statement [EN010106/APP/6.2] and **Chapter 8: Ecology and Nature Conservation** of the Environmental Statement [EN010106/APP/6.1]) were converted into UK Habitat Classification (UKHab) categories, for the purposes of the BNG Assessment. These data were then combined and entered into the metric to calculate the baseline biodiversity units.

3.4 River Habitats

- 3.4.1 Habitat categories, associated distinctiveness, and condition scores are approached differently for watercourses. In line with current guidance (Ref 1), a desk study was undertaken to identify all watercourse habitats present within the Order Limits using the 'Discovering Priority Habitat in England' river data map (Ref 11). If the riparian zone is within the Order Limits boundary, the watercourse is assessed in Metric 3.1. Following this, watercourse habitats were assigned a habitat category (according to the criteria: Priority Habitat, Other Rivers and Streams, Ditches, Canals, Culvert) and distinctiveness using Section 41 of the NERC Act's Priority Habitat descriptions (Ref 12).
- 3.4.2 All aquatic habitats to be directly impacted by the Scheme, i.e., through intrusive crossing along the cable corridor or culverting, in this instance were considered to be ditches. Ditches are assessed separately to rivers and streams and are defined for Biodiversity Metric 3.1 as *"artificially-created, linear water-conveyancing features that are less than 5m wide and are likely to hold water for more than four months of the year. Their hydraulic function is primarily for land drainage and although partially or fully connected to a river system, they would not have been present without human intervention"* (Ref 2).
- 3.4.3 Any watercourses that have been scoped into the assessment as ditches under this definition are therefore subjected to a Ditch Condition Assessment, which involves conducting a survey in the field that uses eight criteria to assess condition, which was undertaken. These criteria include water quality and levels, macrophyte abundance and morphotype diversity, presence of marginal vegetation, physical damage, shading and presence of invasive non-native species. The greater the number of criteria the ditch achieves, the better the condition score attributed to it.
- 3.4.4 Several watercourses within the Order limits that are not being impacted by the Scheme, were scoped in as potential areas of enhancement. These were surveyed in August 2022 and include both river and ditch habitats.
- 3.4.5 To assess condition of rivers and streams, Modular River Physical (MoRPh) surveys were undertaken in line with Natural England Guidance. The survey utilises the MoRPh5 survey methodology (Ref 2), to record the physical and vegetation structural features across the riverbed, bank face and riparian zone (up to 10 m from the bank top). Using an online tool, the results of the field survey are combined with a desk-based assessment of the indicative geomorphic type of the river to generate a watercourse condition.
- 3.4.6 Habitat classification, length measurement values, strategic significance, condition data and watercourse and riparian encroachment information were then

inputted to the metric to determine the baseline biodiversity units for river habitats within the Order Limits boundary.

3.5 Post-development Data

- 3.5.1 The proposed landscape and habitat planting for the Scheme (shown in **Figure 3-1: Sunnica East Site A and B Parameter Plan** and **Figure 3-2: Sunnica West A and B Parameter Plan** of the Environmental Statement [EN010106/APP/6.3] and in the Outline Landscape Environmental Management Plan (OLEMP) were digitised in GIS to create the post-development habitat data, which were used to provide the measurements of the habitats to be retained and created within the Scheme.
- 3.5.2 The post-development habitat data were utilised to determine the post-development biodiversity units. Target conditions have been selected in accordance with the Natural England Biodiversity Metric 3.1 User Guide and Technical Supplement.
- 3.5.3 On receipt of the DCO, long-term ecological management and maintenance for the Order limits will be implemented through detailed Landscape and Ecological Management Plans (LEMP) in accordance with the OLEMP. Therefore, target condition scores for the proposed habitats have been predicted in accordance with Biodiversity Metric 3.1 User Guide and Technical Supplement (Ref 2) and using professional judgement to ensure the condition scores selected were realistic and achievable.

3.6 Strategic Significance

- 3.6.1 Metric 3.1 requires that the strategic significance of all baseline and post-development habitats be defined. Strategic significance refers to areas of local priority for biodiversity and nature improvement, identified within local planning policies. As part of this assessment, the relevant local planning policy documents (see Table 2-1) were reviewed to determine the strategic significance of the habitats on Site. In this instance the application of strategic significance has been guided by the habitats presence within the East Cambridgeshire Nature Recovery Network (ECNRN). Table 2-2 sets out the habitats present within and outside the East Cambridgeshire Nature Recovery Network and the rationale for assigning Strategic Significance values.

2-2 Strategic Significance (ECNRN = East Cambridgeshire Nature Recovery Network)

Habitats	Within NRN	Rationale	Outside NRN	Rationale
Lowland mixed deciduous woodland	High	Contributes to ECNRN	Medium	Mapped as priority habitat but not mapped in local strategy
Lowland calcareous grassland	None Present	NA	Medium	Mapped as priority habitat but not mapped in local strategy

Habitats	Within NRN	Rationale	Outside NRN	Rationale
Lowland dry acid grassland	None Present	NA	Medium	Mapped as priority habitat but not mapped in local strategy
Mixed scrub	High	Contributes to ECNRN	Low	Not in local strategy/ no local strategy
Other coniferous woodland	High	Contributes to ECNRN	Low	Not in local strategy/ no local strategy
Other lowland acid grassland	High	Contributes to ECNRN	Low	Not in local strategy/ no local strategy
Other neutral grassland	High	Contributes to ECNRN	Low	Not in local strategy/ no local strategy
Other woodland; broadleaved	High	Contributes to ECNRN	Low	Not in local strategy/ no local strategy
Other woodland; mixed	High	Contributes to ECNRN	Low	Not in local strategy/ no local strategy
Ponds (Priority Habitat)	None Present	NA	Medium	Mapped as priority habitat but not mapped in local strategy
Cereal crops	Low	Does not contribute to the ECNRN	Low	Not in local strategy/ no local strategy
Developed land; sealed surface	Low	Does not contribute to the ECNRN	Low	Not in local strategy/ no local strategy
Modified grassland	Low	Does not contribute to the ECNRN	Low	Not in local strategy/ no local strategy
Ruderal/Ephemeral	Low	Does not contribute to the ECNRN	Low	Not in local strategy/ no local strategy
Vacant/derelict land/ bare ground	Low	Does not contribute to the ECNRN	Low	Not in local strategy/ no local strategy

3.7 Assumptions and limitations

- 3.7.1 All habitat areas and lengths have been measured manually using ArcGIS based on the Phase 1 Habitat Plan (shown in Figure 8-3 of Chapter 8 of the Environmental Statement [EN010106/APP/6.1]) and the proposed landscape and habitat planting for the Scheme shown in **Figures 3-1 and 3-2** of the Environmental Statement [EN010106/APP/6.3] and the OLEMP. Habitat areas are therefore considered to be approximations only.
- 3.7.2 The total areas of the baseline and post-development plans may vary slightly within the metric calculation. This difference is caused by the rounding of areas of individual habitats within the dataset to two decimal places and the merging of third-party spatial datasets. This has a negligible impact on the BNG Assessment as a whole.
- 3.7.3 It is acknowledged that future changes to the metric will occur during the pre-construction iteration of the BNG calculation. These changes may include elements such as refining advanced or delayed habitat creation timings and the accounting for the creation of potential sustainable drainage features.
- 3.7.4 It is understood that habitats created and enhanced as part of the Scheme will be subject to appropriate ongoing management and monitored to enable correct establishment and growth, and that remedial action will be taken if this does not proceed as expected, otherwise the target conditions used in the calculations may not be met. The OLEMP will be the mechanism for delivering this monitoring and management.

The treatment of under panel grassland

- 3.7.5 Guidance published by BRE (Ref 13) recognises that on average 95% of a site used for solar farm development is “still accessible for plant growth and potentially for wildlife enhancements and complementary agricultural activities such as conservation grazing”. As such 95% of the solar array footprint has been categorised as ‘modified grassland’ in ‘Moderate’ condition with the remaining 5% allocated within the metric as ‘developed land – sealed surface’ to consider array infrastructure.
- 3.7.6 Seed mixes specified for these areas within any long-term management and monitoring plan should favour nectar and pollen rich species that are both stress and shade tolerant. This approach is supported by RSPB (Ref 14) which states “biodiversity gains are possible where intensively cultivated arable or grassland is converted to extensive grassland and/or wildflower meadows between and/or beneath solar panels and in field margins”.
- 3.7.7 Areas of modified grassland under panels have been assigned a post-development target condition of ‘moderate’ to acknowledge both the prolonged levels of shading these areas will receive over the lifetime of the Scheme and the seed mixes and management prescriptions as specified in the OLEMP.

The approach to woodland loss

3.7.8 This assessment considered all habitat losses, including those during construction from the temporary location of compounds, access routes and other activities associated with the Scheme. It is recognised that the Arboricultural Impact Assessment (AIA) [EN010106/APP/8.46] identifies, that in a worse-case scenario, 15,650m² of tree canopy cover will potentially be lost to facilitate construction of the Scheme, e.g., to widen existing access points and internal roads. However, at Gate 5 the position presented in the Ecological Impact Assessment and version 003 of the BNG report, considered that there was sufficient flexibility in the Works Plans to avoid woodland loss at the detailed design stage and that the level of impact will not be realised.

3.7.9 However, at Gate 7 woodland loss has been incorporated into the BNG calculations.

The approach to Stone Curlew mitigation

3.7.10 Provisional locations of 10 Stone Curlew Mitigation plots have been proposed within ECO1 (3 plots), ECO2 (3 plots) and ECO3 (4 plots). These areas will be 'micro-sited' within these areas in response to each plots, archaeological features. Within the metric calculation it has therefore been assumed that 20ha of ephemeral habitats are present across these three field units.

3.7.11 To ensure transparency between the mitigation provided for Stone Curlew and the additionality of wider habitat enhancements intended to ensure the delivery of BNG the scheme has sought to ensure that at least 10% of the BNG delivered is delivered through habitat retention, enhancement or creation activities that is not required to mitigate or compensate for protected species impacts. Defra, when summarising their feedback on the recent BNG consultation, have provided the following example (Ref 15):

"If a development has a baseline score of 10 biodiversity units and needs to achieve a score of 11 units, at least 1 unit should come from separate, non-species mitigation, activities".

3.7.12 Therefore, as Sunnica has a baseline score of 2998 biodiversity units it would need to achieve a unit value of 3298 units to deliver a 10% net gain of which at least 300 units would need to be delivered by non-mitigation related habitat enhancement, mitigation or creation to demonstrate the required approach to additionality.

The approach to temporary impacts

3.7.13 Where temporary access points or visibility splays are proposed, hedgerows have been assumed to be temporarily lost and subsequently reinstated.

3.7.14 Where permanent access points or visibility splays are proposed, permanent hedgerow loss has been assumed.

The approach to created grassland types

3.7.15 The post-development plan assumes the creation and retention of grassland of varying condition and type. This variation is a reflection of the varying soil types

across the 1,057 ha site. Where grassland is proposed to be created over soils with a calcareous influence 'Poor' condition 'Lowland calcareous grassland' has been selected as a target habitat for creation. Similarly, where underlying soils display an acid influence 'Moderate' condition 'Other lowland acid grassland' is the target habitat for creation. This variation in condition has been included in the metric to take into account the lack of an 'other calcareous grassland' option within the metric.

The approach to Arable Flora

- 3.7.16 The BNG technical note (Ref 2) states: "Where field margins meet the definition of a 'better' or higher distinctiveness habitat they should be mapped as such within the metric".
- 3.7.17 As such in the baseline and post development calculations all high value arable margins have been captured within their associated grassland habitat categories.
- 3.7.18 Of those areas of cropland identified as supporting arable flora ranging from 'Site' to 'County' importance the metric calculation assumes that 5% of each cropland compartment comprises an arable flora element. The calculation therefore assumes a total of 4.16 ha of arable flora within the ECNRN and 13.98 ha outside the ECNRN. For the purposes of the metric calculation these areas are presumed to be lost and recreated as a grassland type of equal or higher distinctiveness and condition value. The environmental masterplan also illustrates a further 1.13 ha of indicative arable margin. As these are mapped indicatively these have been captured as created lower distinctiveness "Cropland - Arable field margins game bird mix" with its associated condition score of 1 (Condition Assessment N/A).

Assumptions relating to river and stream habitats

- 3.7.19 The Scheme will only result in those impacts to the watercourses as described in this report within the post-development section below.
- 3.7.20 There are some watercourses and ditches within the Order limits that are not included within this BNG assessment as there will be no impacts to these watercourses or their riparian zones (10 m) from the bank-top either side, or ditches. However, these are assessed in the WFD assessment presented in Appendix 9B of this Environmental Statement [EN010106/APP/6.2].
- 3.7.21 The MoRPh and ditch condition assessment surveys assess watercourse condition based on physical and morphological features, not biological elements of watercourse condition. These are assessed in Appendix 8E of this Environmental Statement [EN010106/APP/6.2].
- 3.7.22 Some ditches were scoped out of the river metric based on the assessment that they likely do not hold water for four months of the year (Ref 2), and therefore they are assessed as part of the adjacent terrestrial area-based habitats or associated features.
- 3.7.23 Enhancements to the impacted wet ditches will consist of soft engineering techniques and improvements to the riparian corridor to improve channel diversity

and biodiversity. These measures will be defined at detailed design stage, following grant of the DCO and prior to construction.

- 3.7.24 Reinstatement of watercourses and ditches after intrusive works (culverting or open trenching) will aim to provide an improved channel form with enhancement works to be carried out (where relevant and appropriate to do so) up to 10 m upstream and downstream of the open trench or culvert. The River Metric assessment assumes (“a best-case scenario”) that 10 m upstream and 10 m downstream of the works will be enhanced.
- 3.7.25 Lee Brook (WFD water body ID: GB105033042970), which runs alongside the Order limits boundary at West Site A, was identified as an area of potential enhancement. However, at the time of survey, the watercourse was dry with terrestrial vegetation growing in the channel following a long period of extreme dry weather in summer 2022. As a result, a MoRPh survey could not be completed, and Lee Brook was scoped out of the river metric.
- 3.7.26 MoRPh and ditch condition assessment surveys for areas of potential enhancement were undertaken in August 2022 during a period of extreme dry weather in the United Kingdom, resulting in very low flows. Therefore, suggested enhancement measures are tailored to the prevailing habitat conditions, which are likely to become more normal as such extreme weather events increase in frequency. Therefore, this is not considered to have had an adverse effect on the watercourse condition generated, or the enhancement measures recommended as a result.

4 Results

4.1 On-site baseline habitats

- 4.1.1 The Order limits covers an area of 1,057.57 ha and the land use is dominated by arable fields. There are mature trees, small, wooded copses, and ponds. In addition, there are approximately 30.82 km of hedgerows and 2.47 km of river and ditch habitats within the Order Limits.

Area-based habitats

- 4.1.2 A description of the area-based habitats present within the Order limits is provided below. The habitats listed in the following sections are presented in their UKHab classification.

Woodland and forest – other woodland; broadleaved

- 4.1.3 Small areas of newly planted broad-leaved woodland are present in the Sunnica East sites A and B and mostly consisted of Field Maple *Acer campestre*, Cherry *Prunus avium* and Ash *Fraxinus excelsior*. Many of the plantation woodlands found scattered along the Grid Connection Routes consisted of mixed broad-leaved and coniferous species.

Woodland and forest - other coniferous woodlands

- 4.1.4 This habitat was predominantly found within the Sunnica East Site B, with larger blocks present in the eastern section. These areas of woodland either solely consisted of or were dominated by Scots Pine *Pinus sylvestris*. In the western section of the Sunnica East Site, strips of mature Scots Pine formed field boundaries; planted as wind breaks and typical of the Breckland landscape. Dominant species of the ground flora in these areas were Chickweed *Stellaria media*, Common Nettle *Urtica dioica* and Dog's Mercury *Mercurialis perennis*. A few small areas of young conifer plantation woodland were present within the Sunnica West Sites and along the Grid Connection Routes, which either solely consisted of, or were dominated, by Scots Pine.

Woodland and forest – lowland mixed deciduous woodland

- 4.1.5 A number of mature semi-natural broad-leaved woodland blocks are present across the Sunnica West A and along the Grid Connection Routes. These woodland blocks typically included species such as Oak *Quercus robur*, Silver Birch *Betula pendula*, Field Maple, Beech *Fagus sylvatica*, Walnut *Juglans regia* and Ash with an understory of Privet *Ligustrum vulgare* and Hawthorn *Crataegus monogyna*.

- 4.1.6 A few areas of semi-natural broad-leaved woodland are present across the Sunnica East Sites A and B. These typically included species such as Beech and Ash with an understory of Snowberry *Symphoricarpos alba*, Privet and Hawthorn.

Heathland and shrub – mixed scrub

- 4.1.7 Pockets of dense and scattered scrub are throughout the Order Limits, consisting predominantly of Hawthorn and Blackthorn *Prunus spinosa*.

Woodland and forest – other woodland: mixed

- 4.1.8 Many of the woodlands found scattered across the Sunnica East Sites A and B consisted of mixed mature broad-leaved and coniferous specimens. Coniferous species were predominantly planted Scots Pine, but a wide variety of broad-leaved species were present, including Field Maple, Cherry, Buckthorn *Rhamnus cathartica*, Oak, Sycamore *Acer pseudoplatanus*, Beech and Ash. Many of the woodlands found scattered across the Sunnica West Site A consisted of mixed mature broad-leaved and coniferous specimens. Coniferous species were predominantly planted Scots Pine, but a wide variety of broad-leaved species were present, Field Maple, Cherry, Buckthorn, Oak, Sycamore, Beech and Ash.

Acid Grassland – lowland dry acid grassland

- 4.1.9 Approximately 6.41 ha of the site is categorised as U1 *Festuca ovina*-*Agrostis capillaris*-*Rumex acetosa* grassland or categorised as SD10 *Carex arenaria* dune community. All are examples of lowland dry acid grassland Priority Habitat.

Acid Grassland – other lowland acid grassland

- 4.1.10 Approximately 5.77 ha, two small areas within Sunnica East Site B, of the site is categorised as 'other lowland acid grassland'. These areas include a semi-improved grassland strip 10-20 m wide between a conifer woodland and arable

fields of light acidic sandy soil with some calcareous influence: and a small area of unmanaged grassland and ephemeral/short perennial vegetation outside a corner of a livestock field.

Grassland – lowland calcareous grassland

- 4.1.11 This habitat is found around an irrigation reservoir on the Sunnica East Site B and is surrounded by arable fields. It comprises tall unmanaged grassland and ruderal herbs with calcareous influences (from chalk exposed through creation of the reservoir). The flora has frequent to abundant Wild Marjoram *Origanum vulgare*, Lady's Bedstraw *Galium verum*, False-oat Grass *Arrhenatherum elatius*, Mugwort *Artemisia vulgaris*, Common Nettle and Bramble *Rubus fruticosus*, with rare to occasional Clustered Bellflower *Campanula glomerata*, Greater Knapweed *Centaurea scabiosa*, Dropwort *Filipendula vulgaris* and Small Scabious *Scabiosa columbaria*.

Grassland – other neutral grassland

- 4.1.12 Small areas of semi-improved neutral grassland, marshy grassland and semi-improved grassland are found across the Order Limits.

Grassland – modified grassland

- 4.1.13 A number of agricultural fields across the Order Limits consisted of Perennial Ryegrass *Lolium perenne* dominated improved grasslands. Isolated areas of semi-improved grassland are also present across Sunnica West A including clearings within mixed woodland in Sunnica West Site A, with dominant Cock's-foot *Dactylis glomerata*, False Oat-grass and Yorkshire-fog *Holcus lanatus*, along with Knapweed *Centaurea* sp. and frequent Tormenitil *Potentilla erecta* and Agrimony *Agrimonia eupatoria*.

Sparsely Vegetated Land – ruderal / ephemeral

- 4.1.14 Small areas of tall ruderal and ephemeral habitat are present throughout the Order Limits and a number of the areas of hardstanding present across the Sunnica West Site A have ephemeral vegetation and bryophyte communities, including Silver Moss *Bryum argenteum*.

Cropland – cereal crops

- 4.1.15 The majority of the Order Limits consists of arable land with bordering grassland and hedgerows.

Ponds – Non-priority habitat

- 4.1.16 Several ponds located throughout the Order Limits, associated with woodland and scrub along arable boundaries.

Urban – vacant / derelict land / bare ground

- 4.1.17 Areas of bare ground can be found throughout the Order Limits, with larger areas of bare ground on the Sunnica East Sites A and B, with disturbed ground, which forms a pig farm on both sites.

Urban – developed land: sealed surface

- 4.1.18 Small areas of hardstanding are scattered throughout the Order Limits, consisting mainly of roads and access tracks. A small building is also present on Sunnica East Site B.

Linear-based habitats (hedgerows and trees)

- 4.1.19 A description of hedgerows and trees present within the Order Limits, summarised below. The habitats listed in the following sections are presented in their UKHab classification.

Line of trees

- 4.1.20 Individual trees are present across the Order Limits. Individual trees have been categorised in UK Habitats as 'Line of Trees'.

Native hedgerow

- 4.1.21 Native species-poor hedgerows can be found at field boundaries across the Order Limits. These species-poor hedgerows have been categorised in UKHab as 'Native Hedgerow'.

Native species-rich hedgerow with trees

- 4.1.22 One native species-rich hedgerow with trees includes Elm sp., Field Rose *Rosa arvensis*, Beech, Common Hawthorn, Wild Privet *Ligustrum vulgare* and Blackthorn.

Native hedgerow with trees

- 4.1.23 Native species-poor hedgerows with trees can be found at field boundaries across the Order Limits. These species-poor hedgerows have been categorised in UK Habitats as 'Native Hedgerow with Trees'.

Linear-based habitats (rivers and ditches)

- 4.1.24 A total of 2.47 km of river/ditch habitats were scoped in and assessed within the baseline habitats, consisting of 0.03 km of culvert impacted by the Scheme and 1.03 km of ditch habitat and 1.41 km of Priority Habitat Stream.

- 4.1.25 The directly impacted habitats are comprised of:

- i. 393 m of a tributary ditch of the River Lark at TL 66870 74570 (between E01 and E02, as shown in **Figure 3-1** of the Environmental Statement [EN010106/APP/6.3]);
- ii. 96 m of a tributary ditch of the River Snail at TL 63328 69099 (W7); and
- iii. 66 m of a tributary ditch in the New River catchment at TL 60273 68642 (W13).

- 4.1.26 Habitats identified as areas of potential enhancement are comprised of:

- i. 1,414 m of the Kennett – Lee Brook (Lee Brook) between TL 66465 74887 and TL 66396 72945; and

- i. 500 m of a tributary ditch of the River Lark at TL 66431 74677 (referred to as Ditch 02 in **Appendix 8E** of the Environmental Statement [EN010106/APP/6.2]).

Impacted ditches

- 4.1.27 The tributary of the River Lark (E01-E02) is a linear drainage ditch bordered by pasture fields in The Fen. It held approximately 20 to 30 cm of clear water at the time of survey. A mixture of emergent, submerged, and floating macrophytes were present in the tributary and it was generally unshaded and dominated by silt substrate. No non-native plant species were recorded along the stretch surveyed. It is culverted for 11 m under a track between fields. This culverted section is automatically assigned 'Poor' condition within the metric. The tributary fits the definition of a ditch and is therefore not a Priority River habitat and is not mentioned in the Local Plan, River Basin Management Plan or Catchment Plans. It is therefore classed as 'Low potential/action not identified in any plan' within the metric, which equates to a low strategic significance. The ditch condition assessment showed that the remaining 382 m of ditch was in moderate condition within the Scheme boundary and is therefore included within the baseline habitats metric calculation as such.
- 4.1.28 The tributary of the River Snail (W7) is a ditch that drains from the Fordham Woods Nature Reserve, although in the stretch surveyed it was bordered by pasture fields. Access was limited to a small stretch of this tributary, however the water that was observed was clear, heavily shaded by trees and the bed was dominated by leaf litter and silt. No non-native plant species were recorded along the stretch surveyed. It was culverted for 6 m under a track between fields. This culverted section is automatically assigned 'Poor' condition within the metric. The tributary fits the definition of a ditch and is therefore not a Priority River habitat and is not mentioned in the Local Plan, River Basin Management Plan or Catchment Plans. It is therefore classed as 'Low potential/action not identified in any plan' within the metric, which equates to a low strategic significance. The ditch condition assessment on the remaining open section of the tributary showed that it was in poor condition. A total of 90 m of this ditch was present within the Scheme boundary. This is therefore included within the baseline habitats metric calculation.
- 4.1.29 The tributary of the New River (W13) runs parallel to the B1102 Ness Road and is bordered by pasture fields to the right. At the time of survey, it was mostly dry and unshaded, although some wetted areas were dominated by bulrush. It has steep banks, likely due to historic dredging and its bank tops had been recently cut back at the time of survey. No non-native plant species were recorded along the stretch surveyed. It is culverted for 8 m under a track. This culverted section is automatically assigned 'Poor' condition within the metric. The tributary fits the definition of a ditch and is therefore not a Priority River habitat and is not mentioned in the Local Plan, River Basin Management Plan or Catchment Plans. It is therefore classed as 'Low potential/action not identified in any plan' within the metric, which equates to a low strategic significance. The ditch condition assessment showed that the remaining open section of the tributary is in poor condition and a total of 58 m of this is present within the Order Limits and was therefore included within the baseline habitats metric calculation.

Watercourses and ditches identified for enhancement opportunities

- 4.1.30 The following watercourses were scoped in as potential enhancement opportunities with the aim of achieving a 10% net gain in the river metric.
- 4.1.31 The Kennett – Lee Brook (Lee Brook) (WFD water body ID: GB105033043020) flows north from Freckenham through Lee Farm until it joins the River Lark; 240 m of the river lies within the Order Limits, plus an additional 1,174 m² of its riparian zone. At the southern end of the reach near Beck Road, substrate consisted of a gravel and sand bed with areas of fine silt deposits. At the northern end of the reach there was no perceived flow and a layer of floating macrophytes covering the whole width of the river. Substrate here consisted of silt and leaf litter. The river is bordered by arable fields for most of its length and its riparian zone consists mainly of grassy banks and short reaches of trees. An area of marshy reedbed is present towards the northern end of the reach. The Kennett – Lee Brook (Lee Brook) is assigned as having major watercourse encroachment, due to the presence of a weir directly upstream of the bridge at Beck Road. Based on the MoRPh survey, the river is considered to be in “Moderate” condition. The section of the Kennett – Lee Brook (Lee Brook) within the Order Limits is a Priority River habitat and is mentioned within the Chalk Stream Restoration Strategy (Ref 16). The Kennett – Lee Brook (Lee Brook) has been recorded in the metric as “Within River Basin Management Plans” and is therefore classed as being of high strategic significance.
- 4.1.32 The tributary to the River Lark (Ditch 02) runs parallel to the Kennett – Lee Brook (Lee Brook) and is bordered by arable fields and marshy grassland. At the time of survey, the water was clear, heavily shaded by bankside vegetation and the bed was dominated by leaf litter and silt. The ditch has steep banks, likely due to historic dredging, with un-managed bank tops. No non-native plant species were recorded in the reach surveyed. The tributary fits the definition of a ditch and is therefore not a Priority River habitat and is not mentioned in the Local Plan, River Basin Management Plan or Catchment Plans. It is therefore classed as ‘Low potential/action not identified in any plan’ within the metric, which equates to a low strategic significance.

4.2 Summary of BNG Results

- 4.2.1 The site totals 1057.57 ha and for ease of assessment has been subdivided into 50 individual field compartments.
- 4.2.2 Capturing the occupancy and extent of habitats within each field compartment has resulted in metric calculations with over 600 individual data points.
- 4.2.3 Therefore, data is not reproduced within this report in full but within the following annotated BNG metric calculator excel files:
- Sunnica BNG Metric 1: All field parcels within the East Cambs Nature Recovery Network
 - Sunnica BNG Metric 2: All field parcels outside the East Cambs Nature Recovery Network

- Sunnica BNG Metric 3: Hedgerows and individual trees
- Sunnica BNG Metric 4: River Metric

4.2.4 A summary of the results is shown in **Tables 4-3 to 4-6**. Based on the current Post-Development Plan, the Scheme would result in an estimated net gain of 40.25% in habitats, a net gain of 28.09% in hedgerows, and a net gain of 11.37% rivers.

Table 4-3: Summary Habitat Area Changes

Habitats	Baseline Area	Area Retained	Area Enhanced	Area Created
Arable field margins game bird mix	na	na	na	1.13
Cereal crops	799.94	98.17	na	na
Developed land; sealed surface	12.46	11.80	na	77.45
Lowland calcareous grassland	0.91	0.91	na	93.77
Lowland dry acid grassland	6.41	6.41	na	na
Lowland mixed deciduous woodland	10.53	na	9.68	12.97
Mixed scrub	4.68	3.48	na	2.24
Modified grassland	53.92	15.22	na	444.95
Other coniferous woodland	5.76	5.71	na	na
Other lowland acid grassland	5.77	4.54	na	150.39
Other neutral grassland	63.64	15.07	na	20.91
Other woodland; broadleaved	3.40	3.26	na	31.53
Other woodland; mixed	16.13	16.06	na	na
Ponds (Priority habitat)	1.58	1.58	na	na
Purple moor grass and rush pastures	na	na	na	4.83
Ruderal/Ephemeral	4.14	0.63	na	20.00
Vacant/derelict land/ bare ground	68.28	4.88	na	na
Urban Trees*	0.77	0.77	na	1.25
Total	1,057.57	187.73	9.68	860.17

* Urban tree areas are excluded from total area to prevent double counting of area; however, the unit contributions are included within the habitat unit total.

Table 4-4: Summary Hedgerow Length Changes (km)

Habitats	Baseline Length	Length Retained	Length Enhanced	Length Created
Line of trees	5.15	4.91	na	na
Line of Trees - Associated with bank or ditch	0.04	0.04	na	na
Native hedgerow	21.41	20.07	na	0.38
Native Hedgerow - Associated with bank or ditch	1.08	0.98	na	0.09
Native Hedgerow with trees	2.60	2.56	na	0.03
Native Hedgerow with trees - Associated with bank or ditch	0.54	0.51	na	0.03
Native Species Rich Hedgerow	na	na	na	5.56
Total	30.82	29.08	0.00	6.09

Table 4-5: Summary River Length Changes (km)

Habitats	Baseline Length	Length Retained	Length Enhanced	Length Created
Culvert	0.03	0.03	0.00	0.01
Ditches	1.03	0.96	0.06	na
Priority Habitat	1.41	0.00	1.41	na
Total	2.47	0.99	1.47	0.01

Table 4-6: Summary Biodiversity Unit Changes

Area / Linear Units	On-Site Baseline	On-Site Post-Intervention	Total Unit Net Change	Total Net % Change
Habitat Units	3050.95	4193.444,204.51	1142.50	37.45%
Hedgerow Units	153.57	196.71	43.14	28.09%
River Units	18.71	20.83	2.13	11.37%


5 Conclusions

- 5.1.1 Based on the current proposals and outlined assumptions, the Scheme is predicted to result in an overall net gain of approximately 37% habitat units, 28% hedgerow units and 11% river units. These values exceed the 10% net gain target for habitat, hedgerow and river units set out in the Environment Act. As the Scheme is expected to achieve the 10% BNG target across all three measures, no further recommendations for habitat creation or enhancement are provided for these habitats.
- 5.1.2 The trading rules within the metric are a set of rules that try to prevent the trading down of habitat distinctiveness. Under the trading rules, losses of habitat are to be compensated for on a “like for like” or “like for better” basis. The trading rules within the Metric are currently satisfied for each level of habitat distinctiveness.
- 5.1.3 Mitigation and compensation measures for protected species may be counted towards a scheme’s biodiversity net gain calculation but those measures should not make up all of a development’s biodiversity net gain. At least 10% of the gain should be delivered through separate activities which are not required to directly mitigate or compensate for protected species impacts. In this instance units generated through the mitigation interventions designed for Stone Curlew deliver a total of 79 units, 6.92% of the 1142 habitat unit uplift delivered by the scheme. As such, the overall net gain of 37.45% has taken into account the need for additionality when considering the schemes wider environmental planning policy and legislative requirements.
- 5.1.4 It is important to note that the outputs of the metric are dependent on all created and retained and enhanced habitats meeting the target conditions, subject to the criteria outlined within Natural England’s Biodiversity Metric 3.1 Technical Note and within the allotted time to condition. Management methods to meet this condition target have been outlined within the Landscape and Ecology Management Plan brought forward to include the measures set out in the OLEMP. The OLEMP is presented as **Appendix 10I** of the Environmental Statement **[EN010106/APP/6.2]**.
- 5.1.5 All of the habitat enhancement/creation options taken forward will need to be monitored to ensure their correct establishment. Remedial action will need to be undertaken if this does not proceed as expected, otherwise the target conditions used in the calculations may not be met and the predicted biodiversity units might not be achieved. Long-term monitoring and management will therefore be secured through the OLEMP.

6 References

- Ref 1. Natural England's Biodiversity Metric 3.1 User Guide
- Ref 2. Natural England (2022). The Biodiversity Metric 3.1 – Technical Supplement.
- Ref 3. Her Majesty's Stationery Office (2021) National Planning Policy Framework
- Ref 4. East Cambridgeshire District Council Local Plan. Adopted April 2015
- Ref 5. East Cambridgeshire District Council Supplementary Planning Document Natural Environment September 2020
- Ref 6. East Cambridgeshire District Council 2022 Biodiversity Net Gain
- Ref 7. East Cambridgeshire District Council Supplementary Planning Documents Renewable Energy Development (Commercial Scale) October 2014
- Ref 8. Forest Heath District Council Core Strategy Adopted 2010
- Ref 9. Forest Heath and St Edmundsbury Local Plan: Joint Development Management Policies Document (last updated February 2015)
- Ref 10. Fordham Neighbourhood Plan (made December 2018)
- Ref 11. Discovering Priority Habitats in England. River data
- Ref 12. Natural Environment and Rural Communities Act (2006) Section 41.
- Ref 13. BRE (2014) Biodiversity Guidance for Solar Developments. Eds G E Parker and L Greene
- Ref 14. RSPB Policy Briefing on Solar Energy. December 2014
- Ref 15. DEFRA (2023) Government response and summary of responses: Biodiversity Net Gain (<https://www.gov.uk/government/consultations/consultation-on-biodiversity-net-gain-regulations-and-implementation/outcome/government-response-and-summary-of-responses>)
- Ref 16. Catchment Based Approach (CaBA). Chalk Stream Restoration Strategy 2021

Appendix A Order Limits

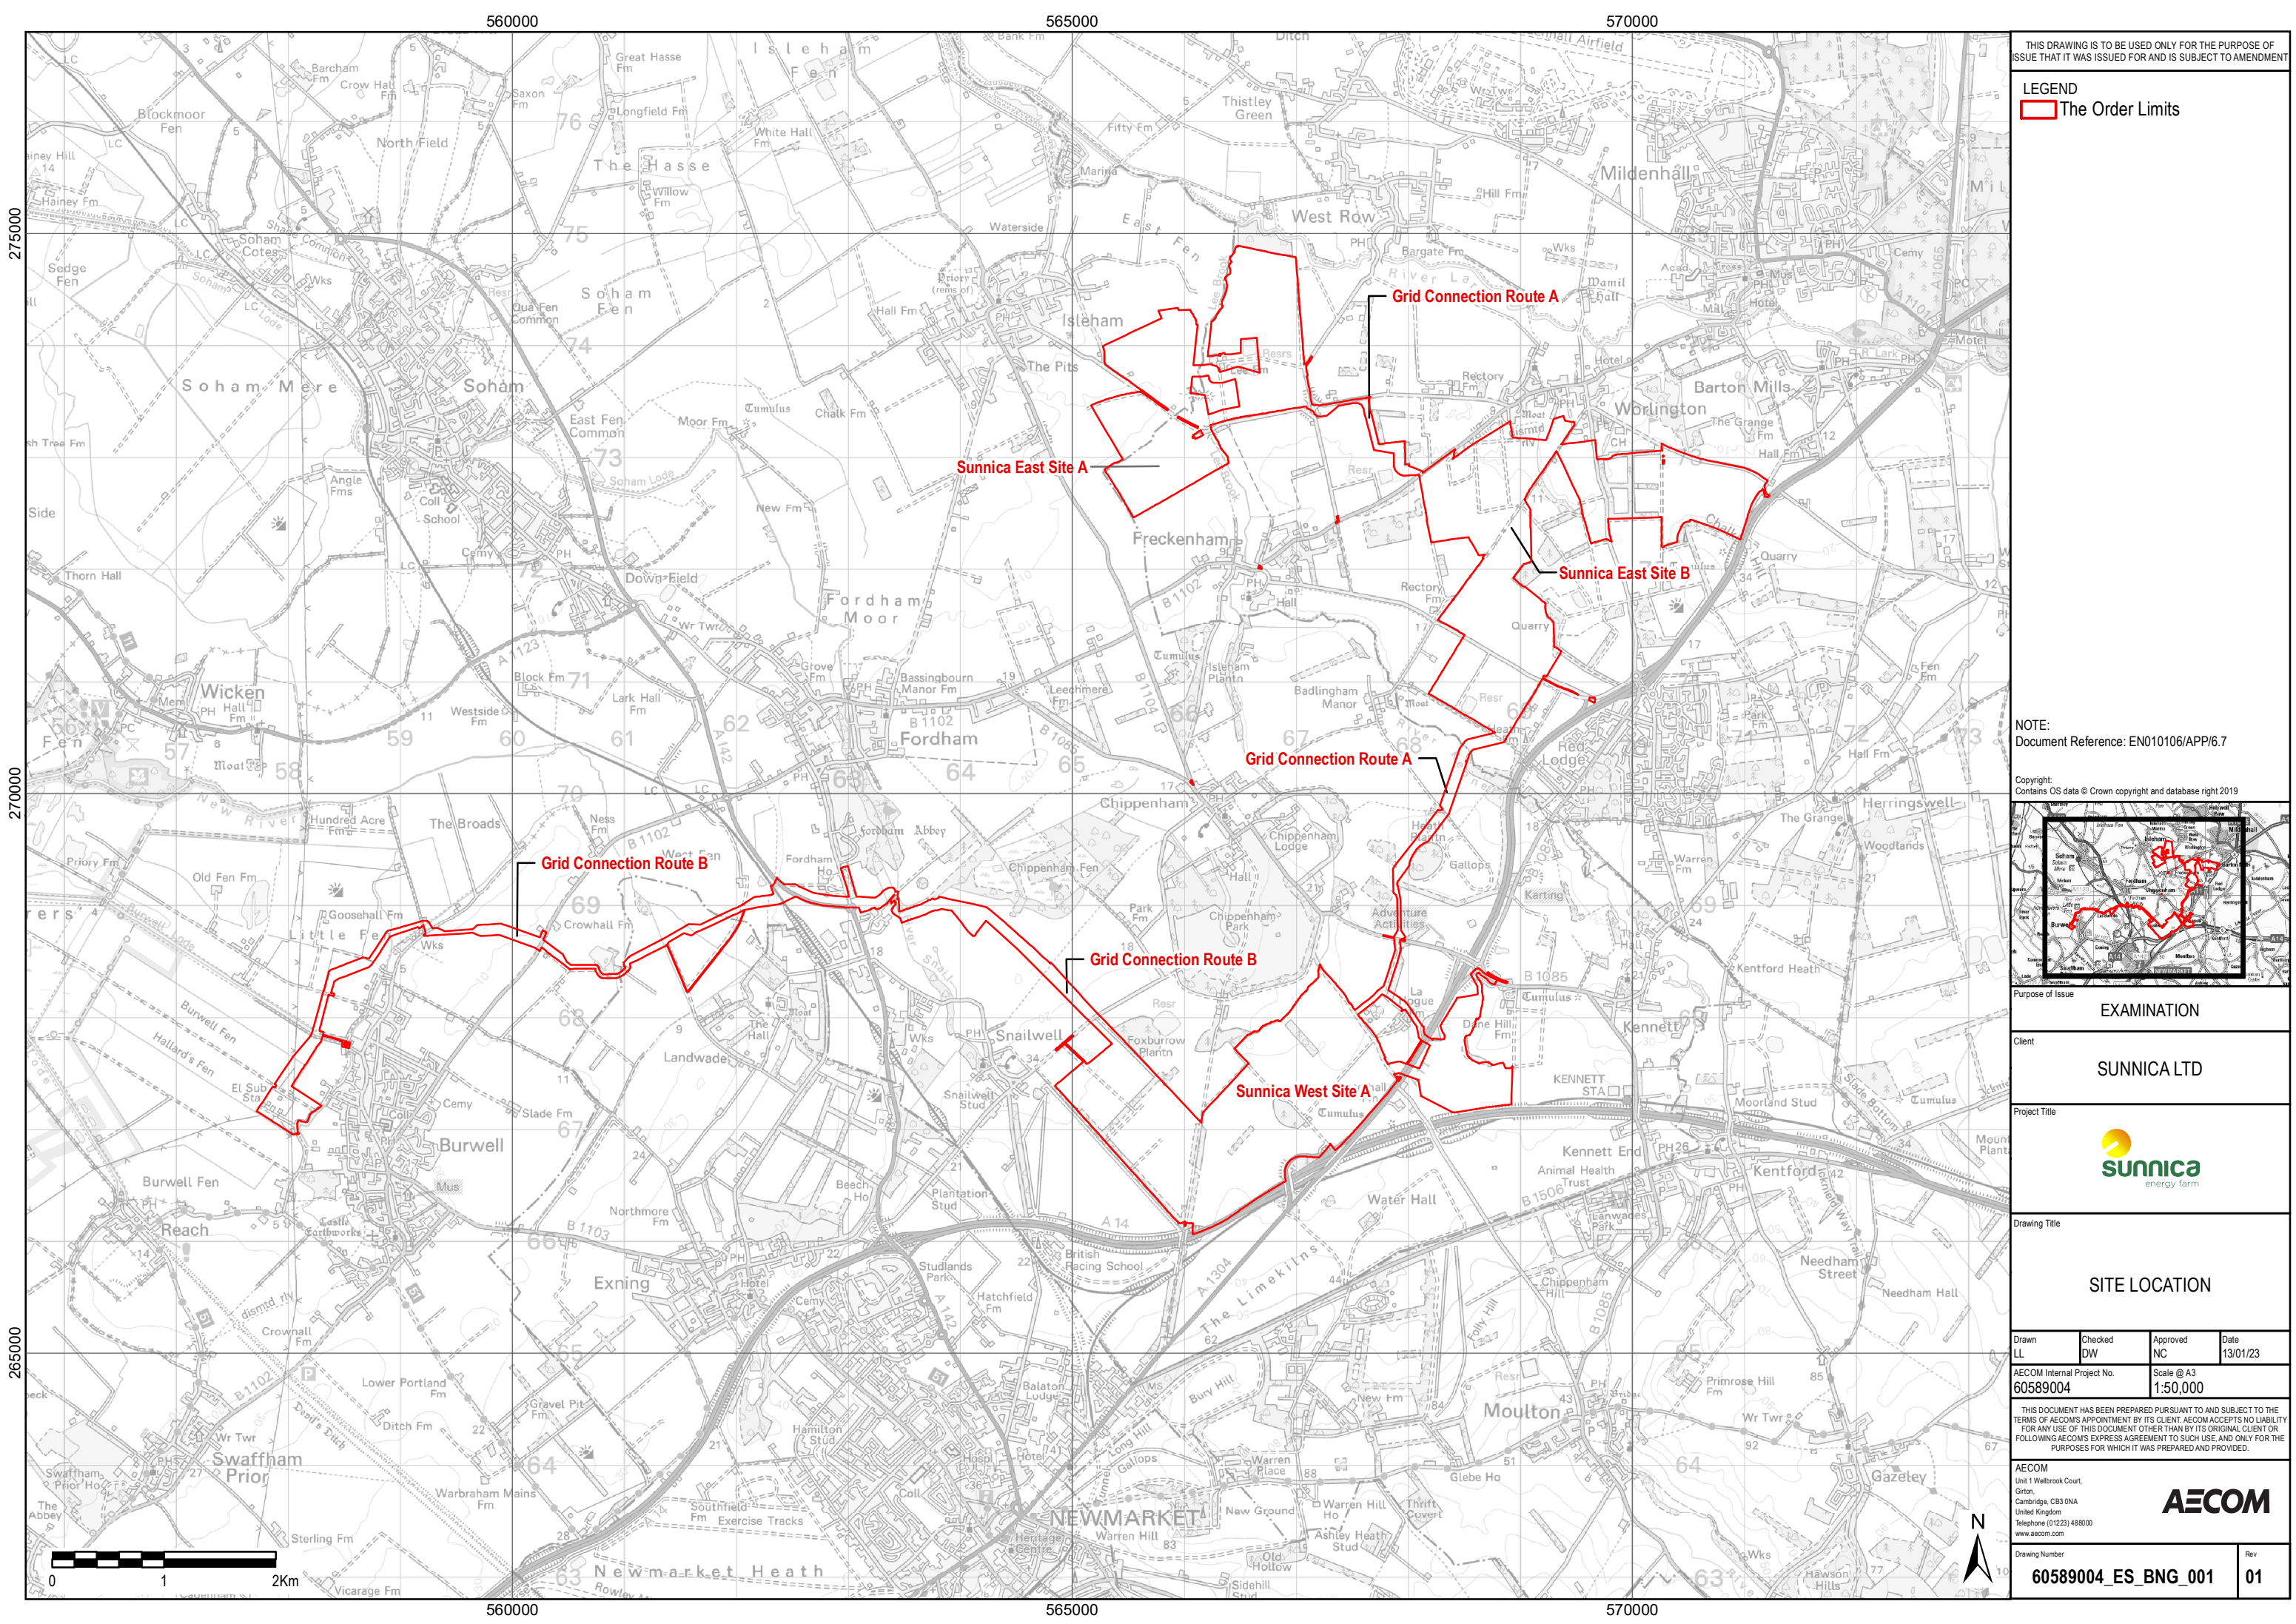


THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF
ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND
The Order Limits

NOTE:
Document Reference: EN010106/APP/6.7

Copyright:
Contains OS data © Crown copyright and database right 2019



Purpose of Issue
EXAMINATION

Client
SUNNICA LTD

Project Title



Drawing Title
SITE LOCATION

Drawn LL	Checked DW	Approved NC	Date 13/01/23
AECOM Internal Project No. 60589004		Scale @ A3 1:50,000	


THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE
TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY
FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR
FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE AND ONLY FOR THE
PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number 60589004_ES_BNG_001	Rev 01
---------------------------------------	-----------

Appendix B Phase 1 Habitat Plan

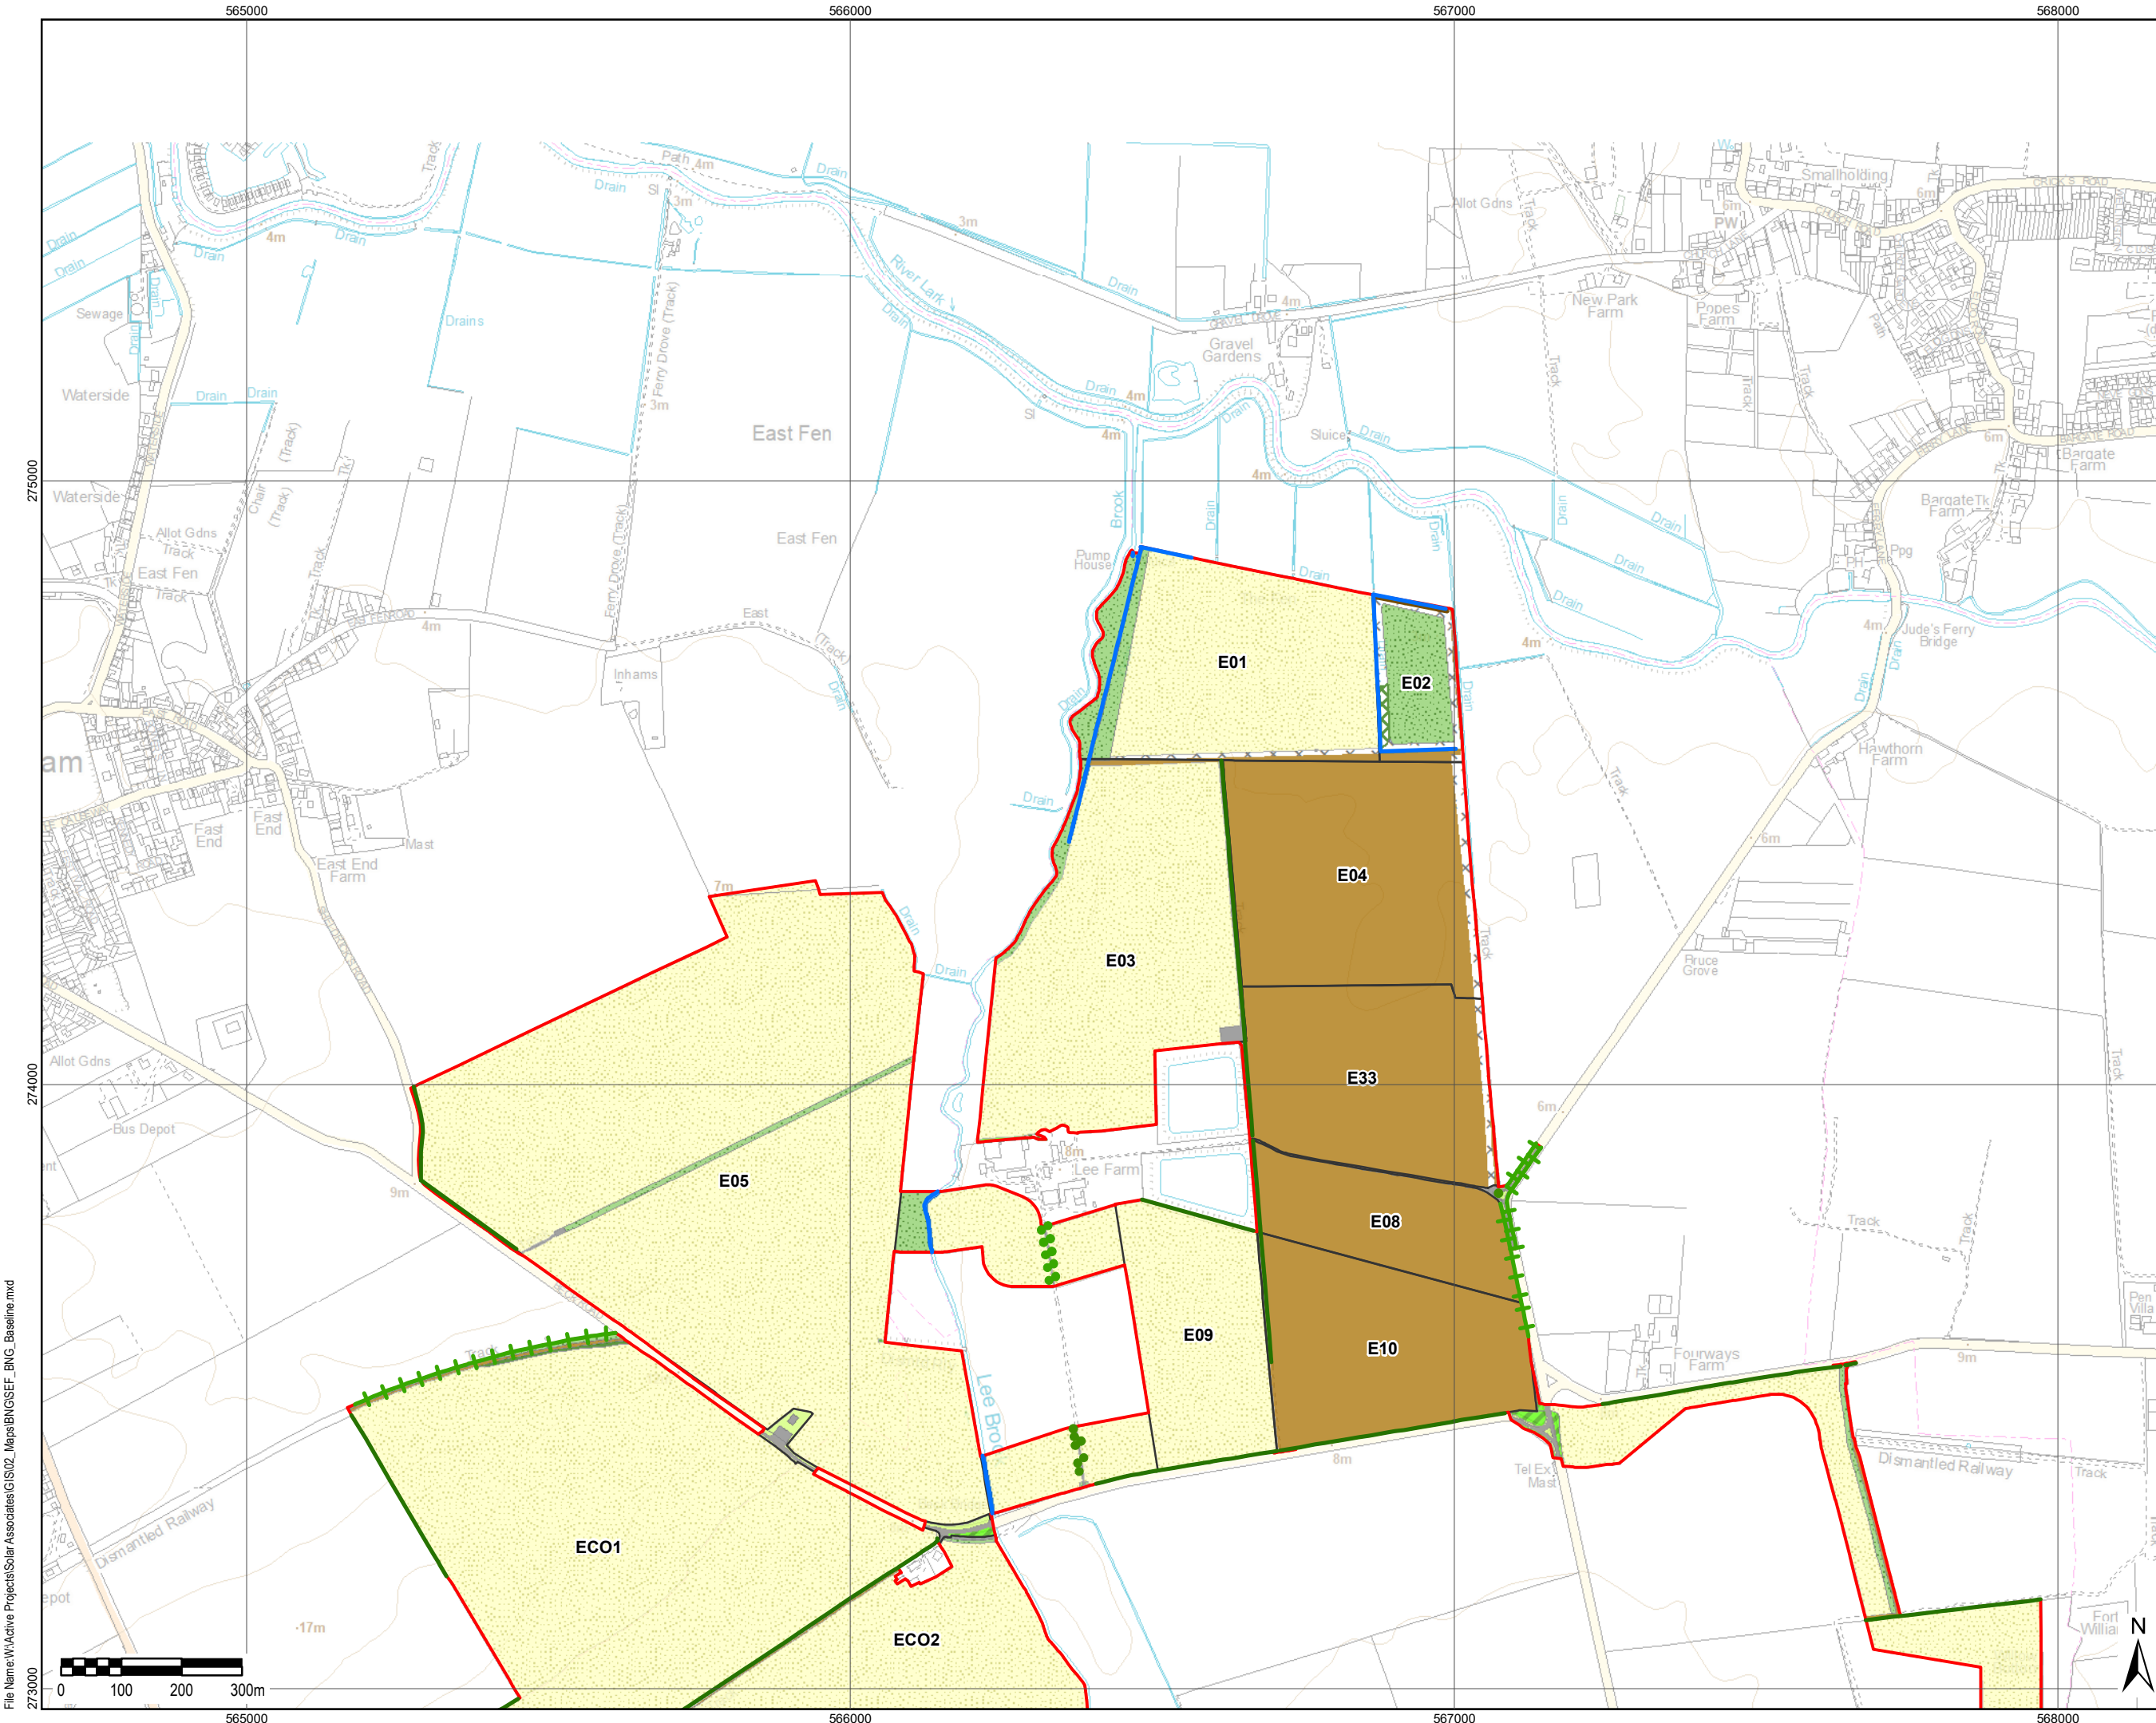

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Mixed scrub
 - Other neutral grassland
 - Modified grassland
 - Ruderal/Ephemeral
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Line of trees
 - Native hedgerow
 - Native hedgerow; with ditch
 - Native hedgerow with trees
 - Other rivers and streams
 - Urban tree

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title

Drawing Title
BIODIVERSITY NET GAIN BASELINE

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.


AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number
FIGURE 1.1

Rev
0

File Name: \\Active Projects\\Solar Associates\\GIS02_Maps\\BINGSEF_BNG_Baseline.mxd

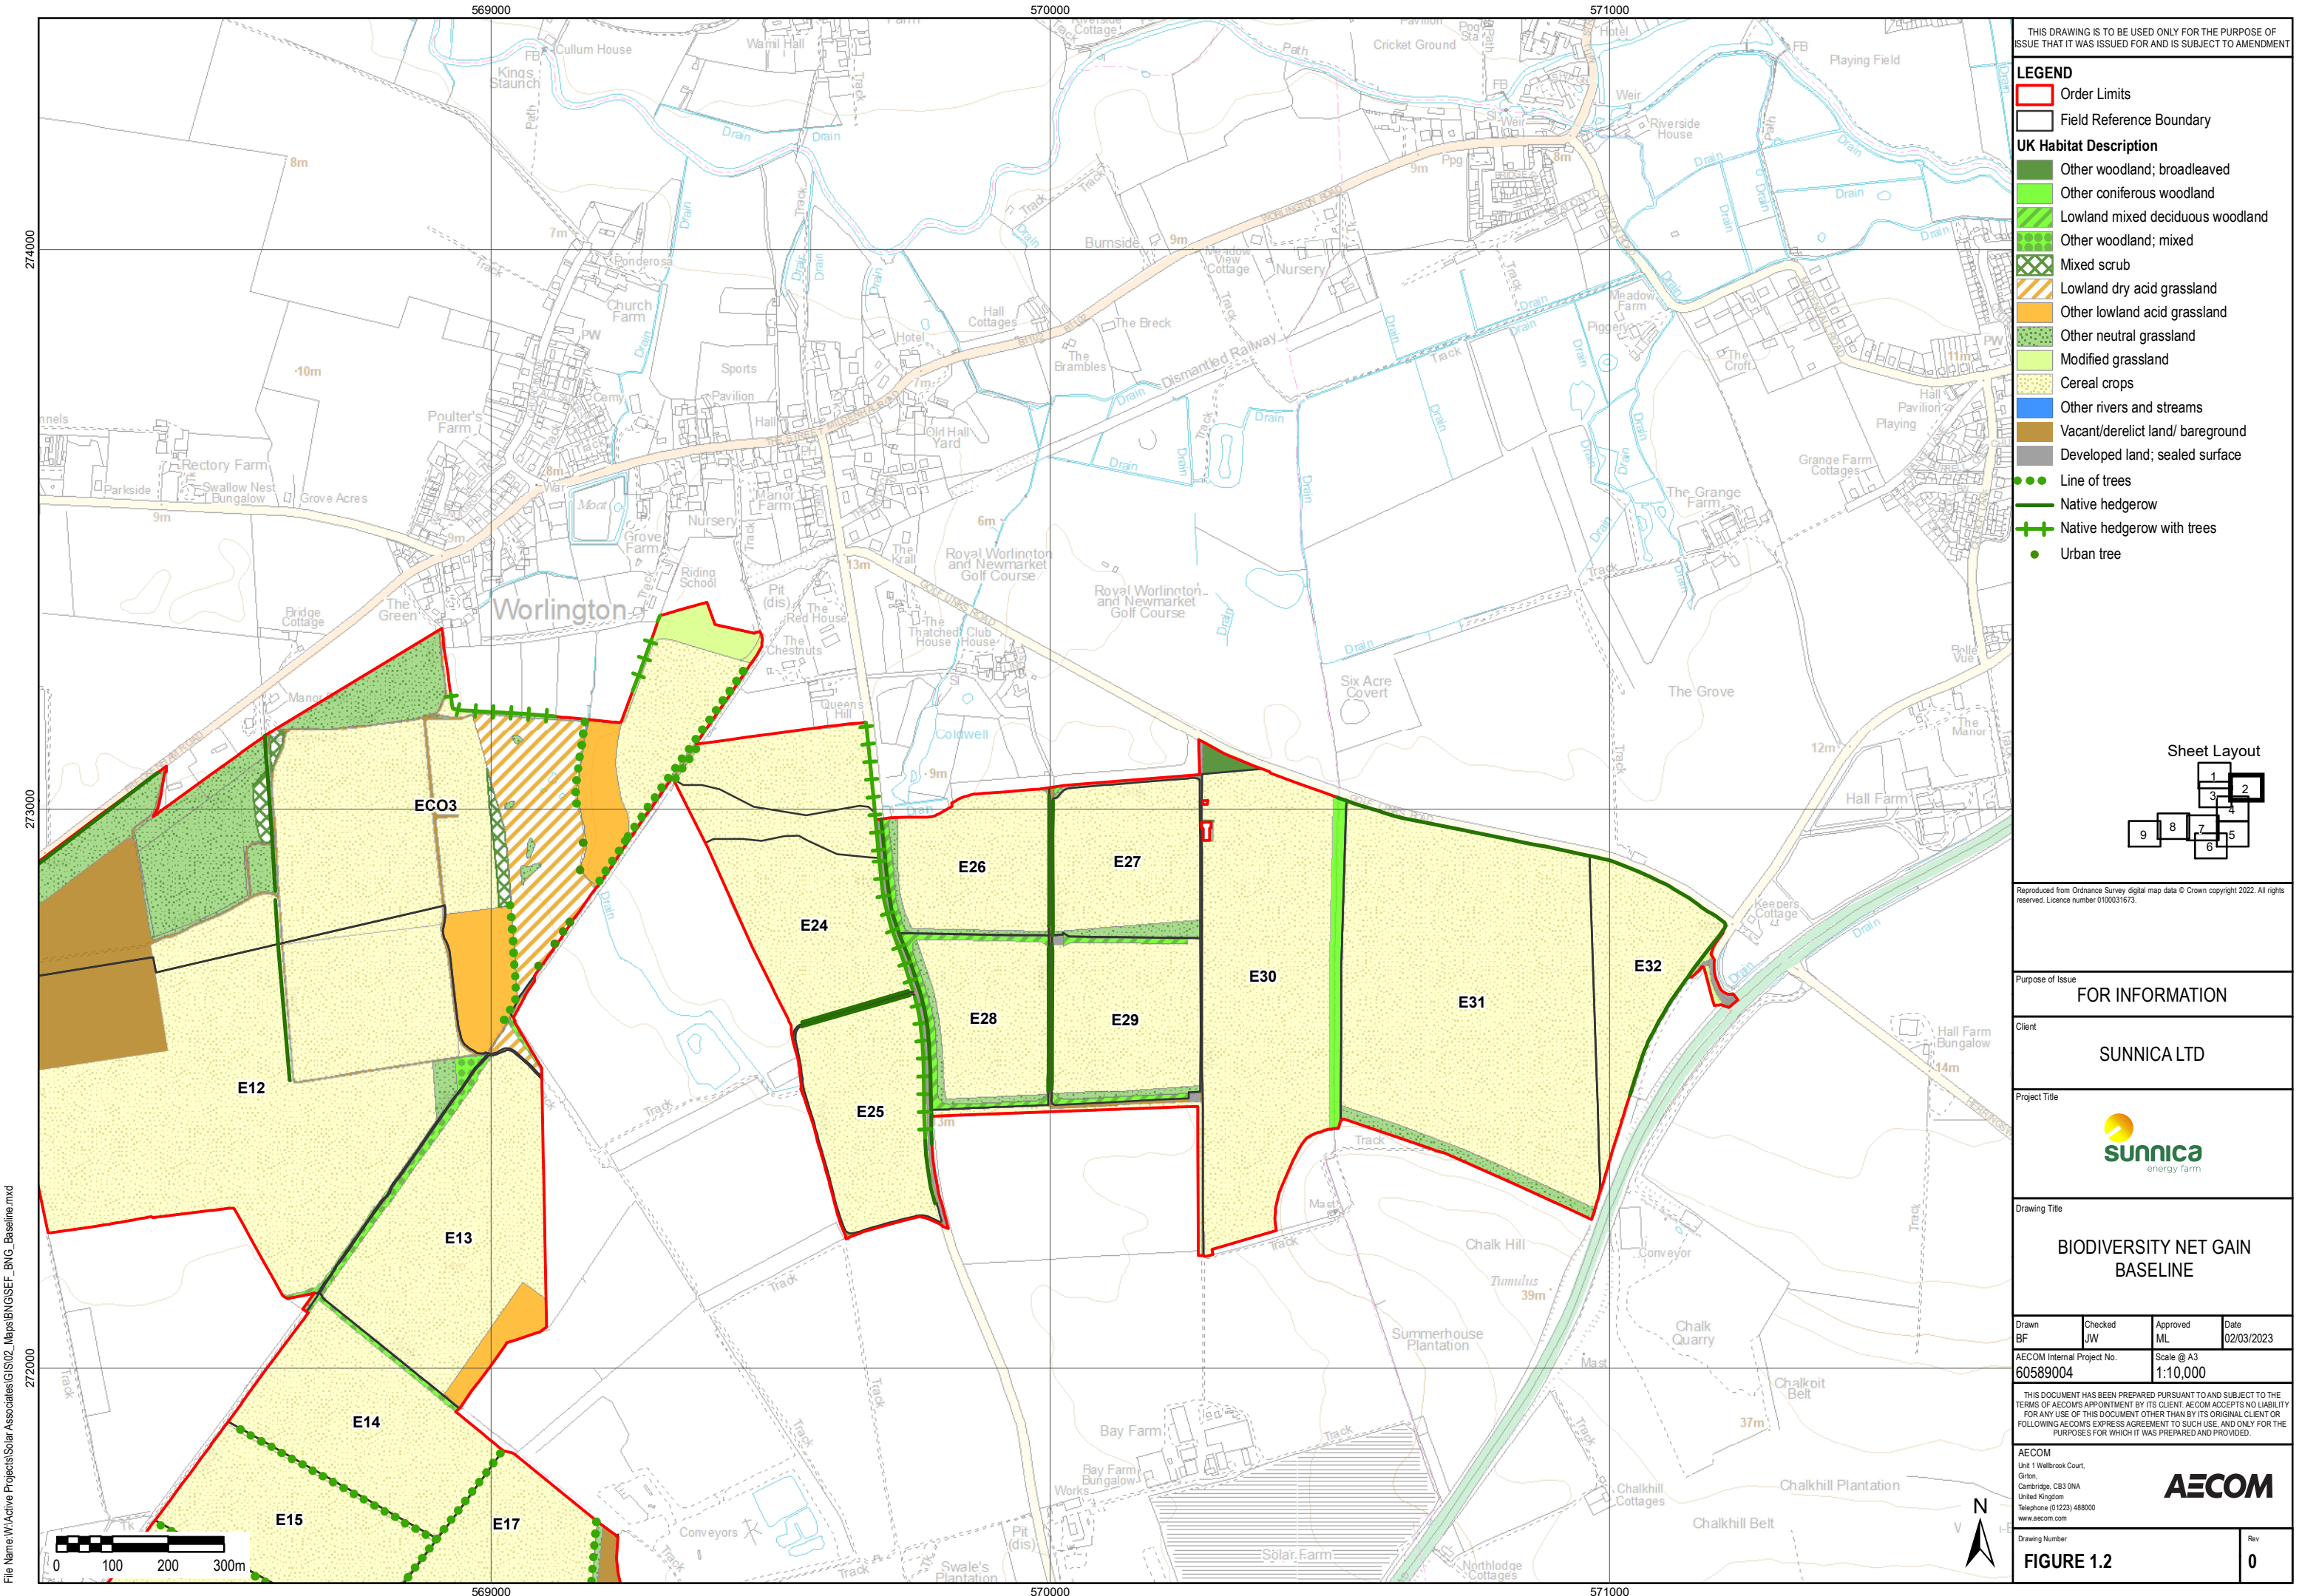


THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Mixed scrub
 - Lowland dry acid grassland
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
- Line of trees
- Native hedgerow
- Native hedgerow with trees
- Urban tree

Sheet Layout



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title

Drawing Title
BIODIVERSITY NET GAIN
BASELINE


Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 11 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com


AECOM

Drawing Number FIGURE 1.2	Rev 0
-------------------------------------	-----------------

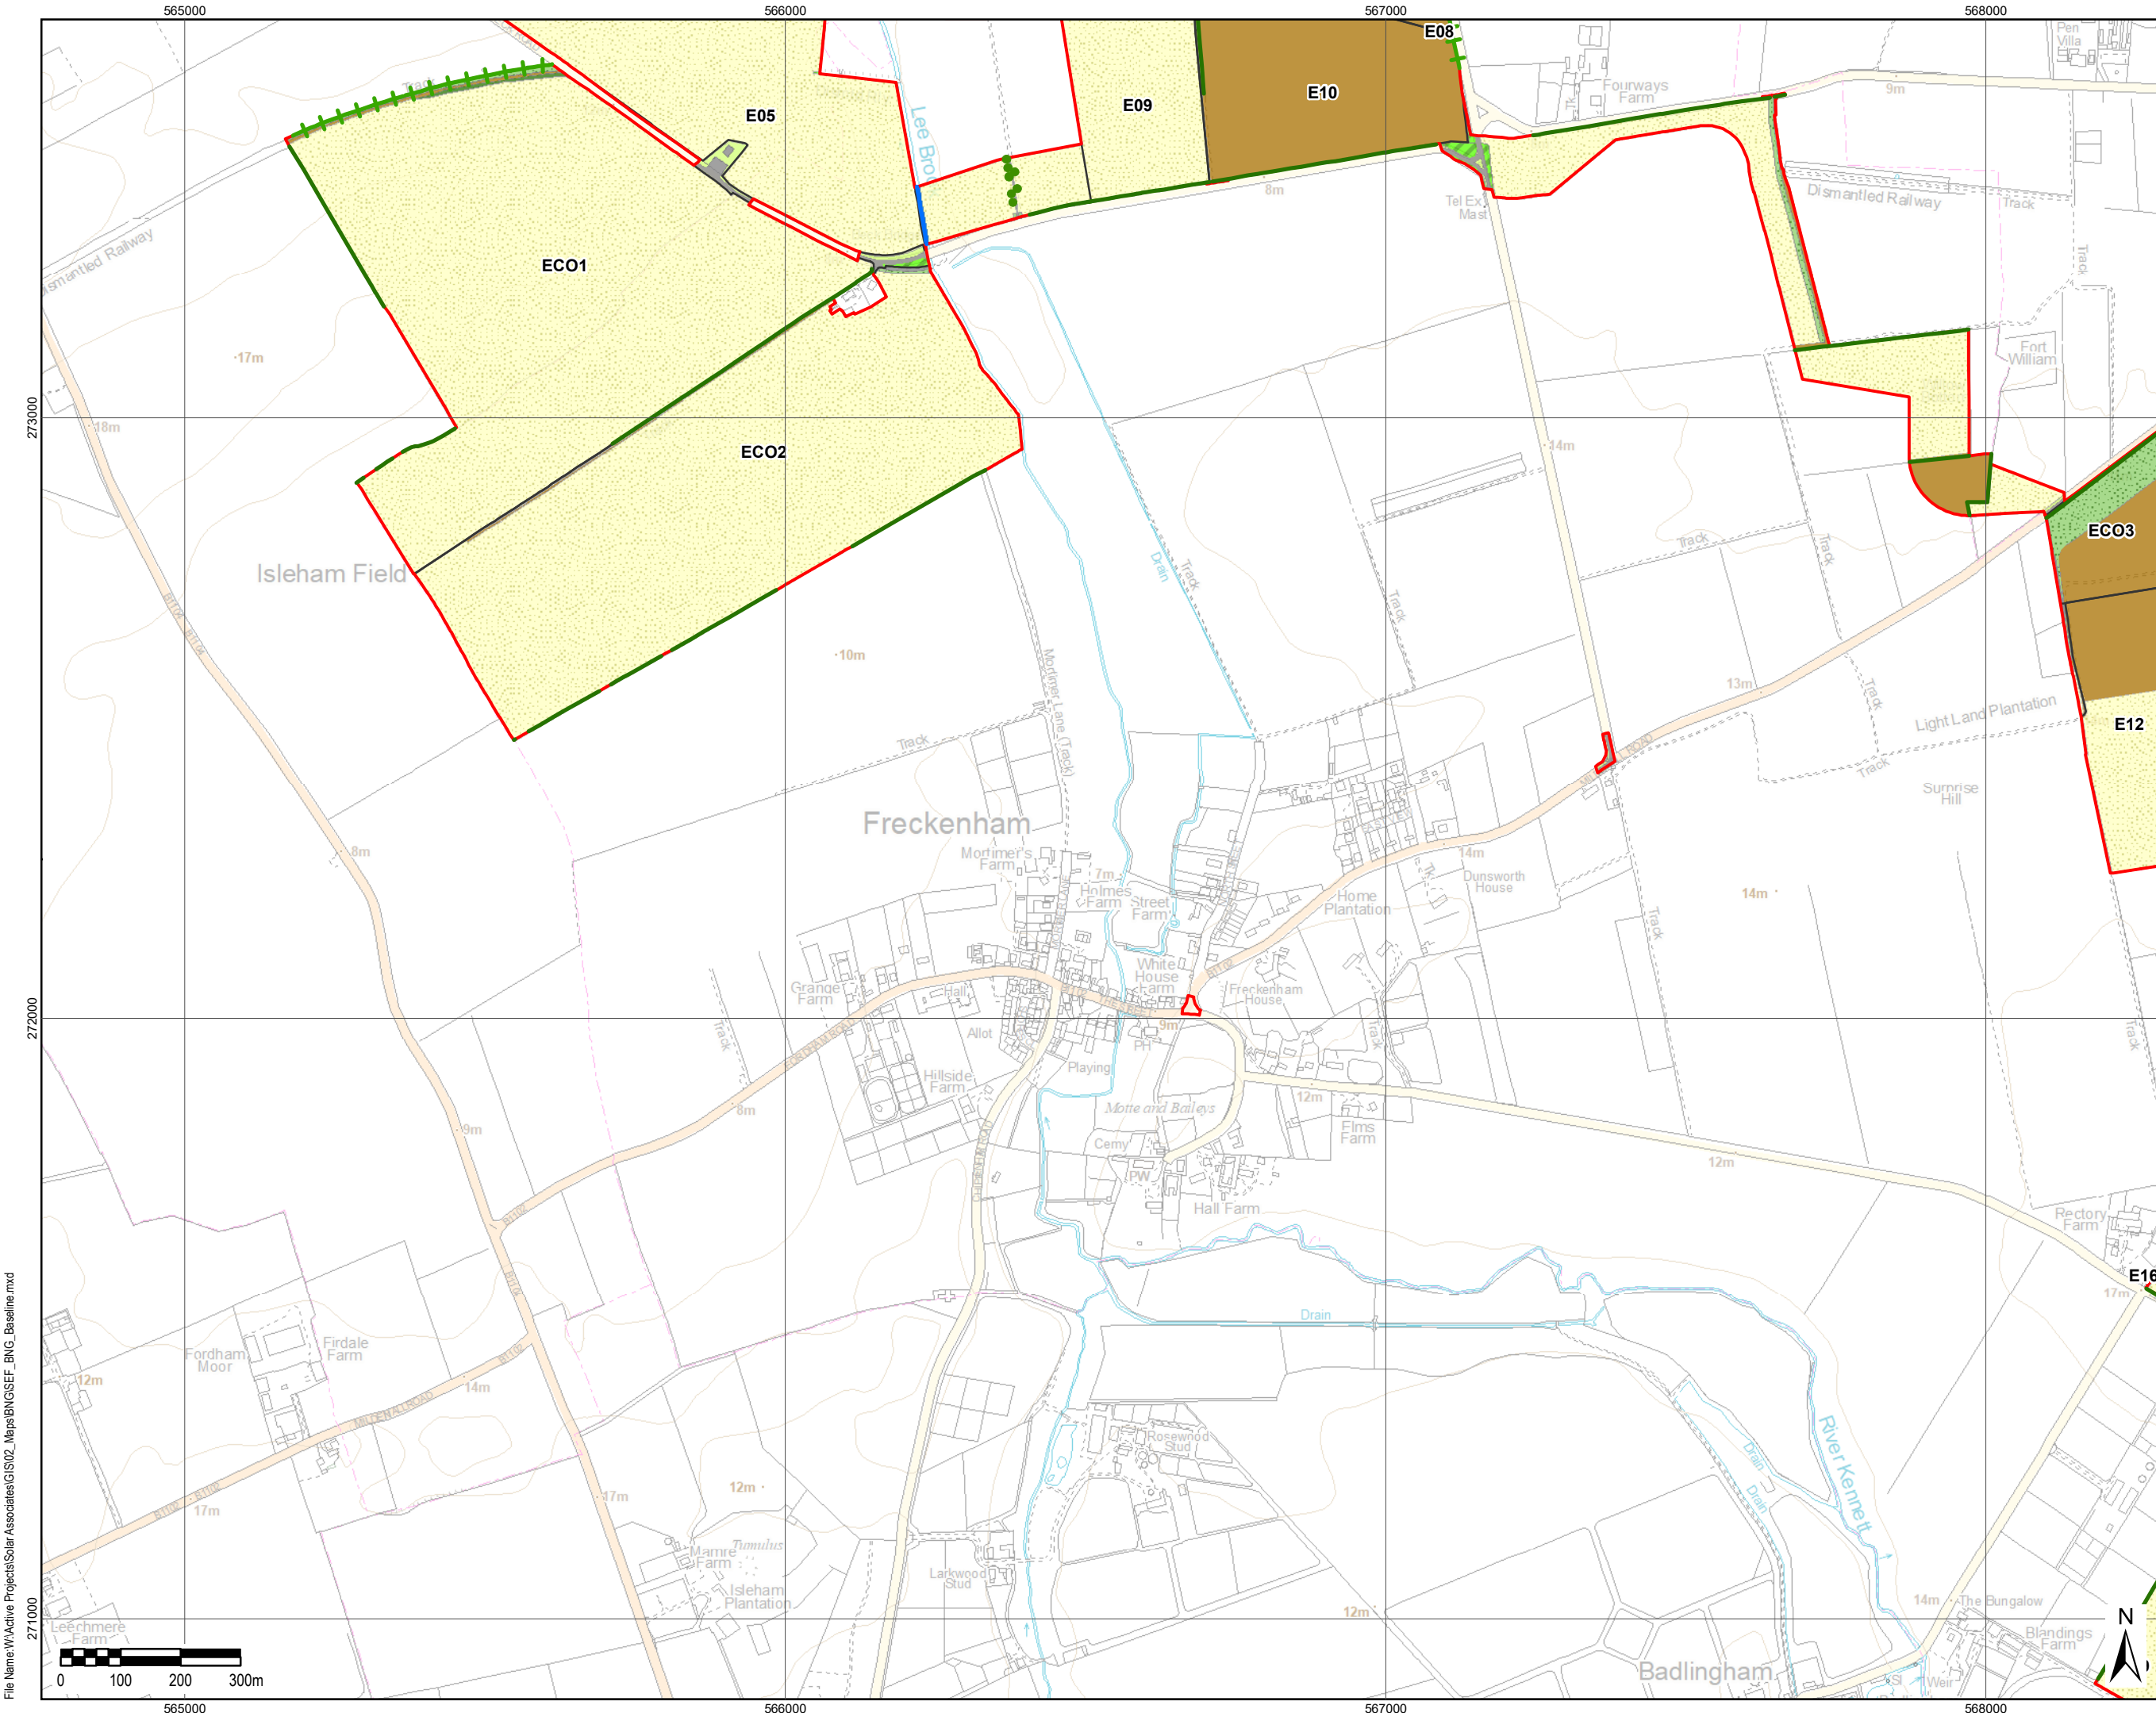

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT


- LEGEND**
- Order Limits
 - Field Reference Boundary
 - UK Habitat Description**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other neutral grassland
 - Modified grassland
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Native hedgerow
 - Native hedgerow with trees
 - Other rivers and streams
 - Urban tree



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue			
FOR INFORMATION			
Client			
SUNNICA LTD			
Project Title			
			
Drawing Title			
BIODIVERSITY NET GAIN BASELINE			
Drawn	Checked	Approved	Date
BF	JW	ML	02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	
THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.			
AECOM Unit 1 Wellbrook Court, Gorton, Cambridge, CB3 0NA United Kingdom Telephone (01223) 488000 www.aecom.com			
Drawing Number			Rev
FIGURE 1.3			0

File Name: \\Active Projects\Solar Associates\GIS\02_Maps\BINGSEF_BNG_Baseline.mxd

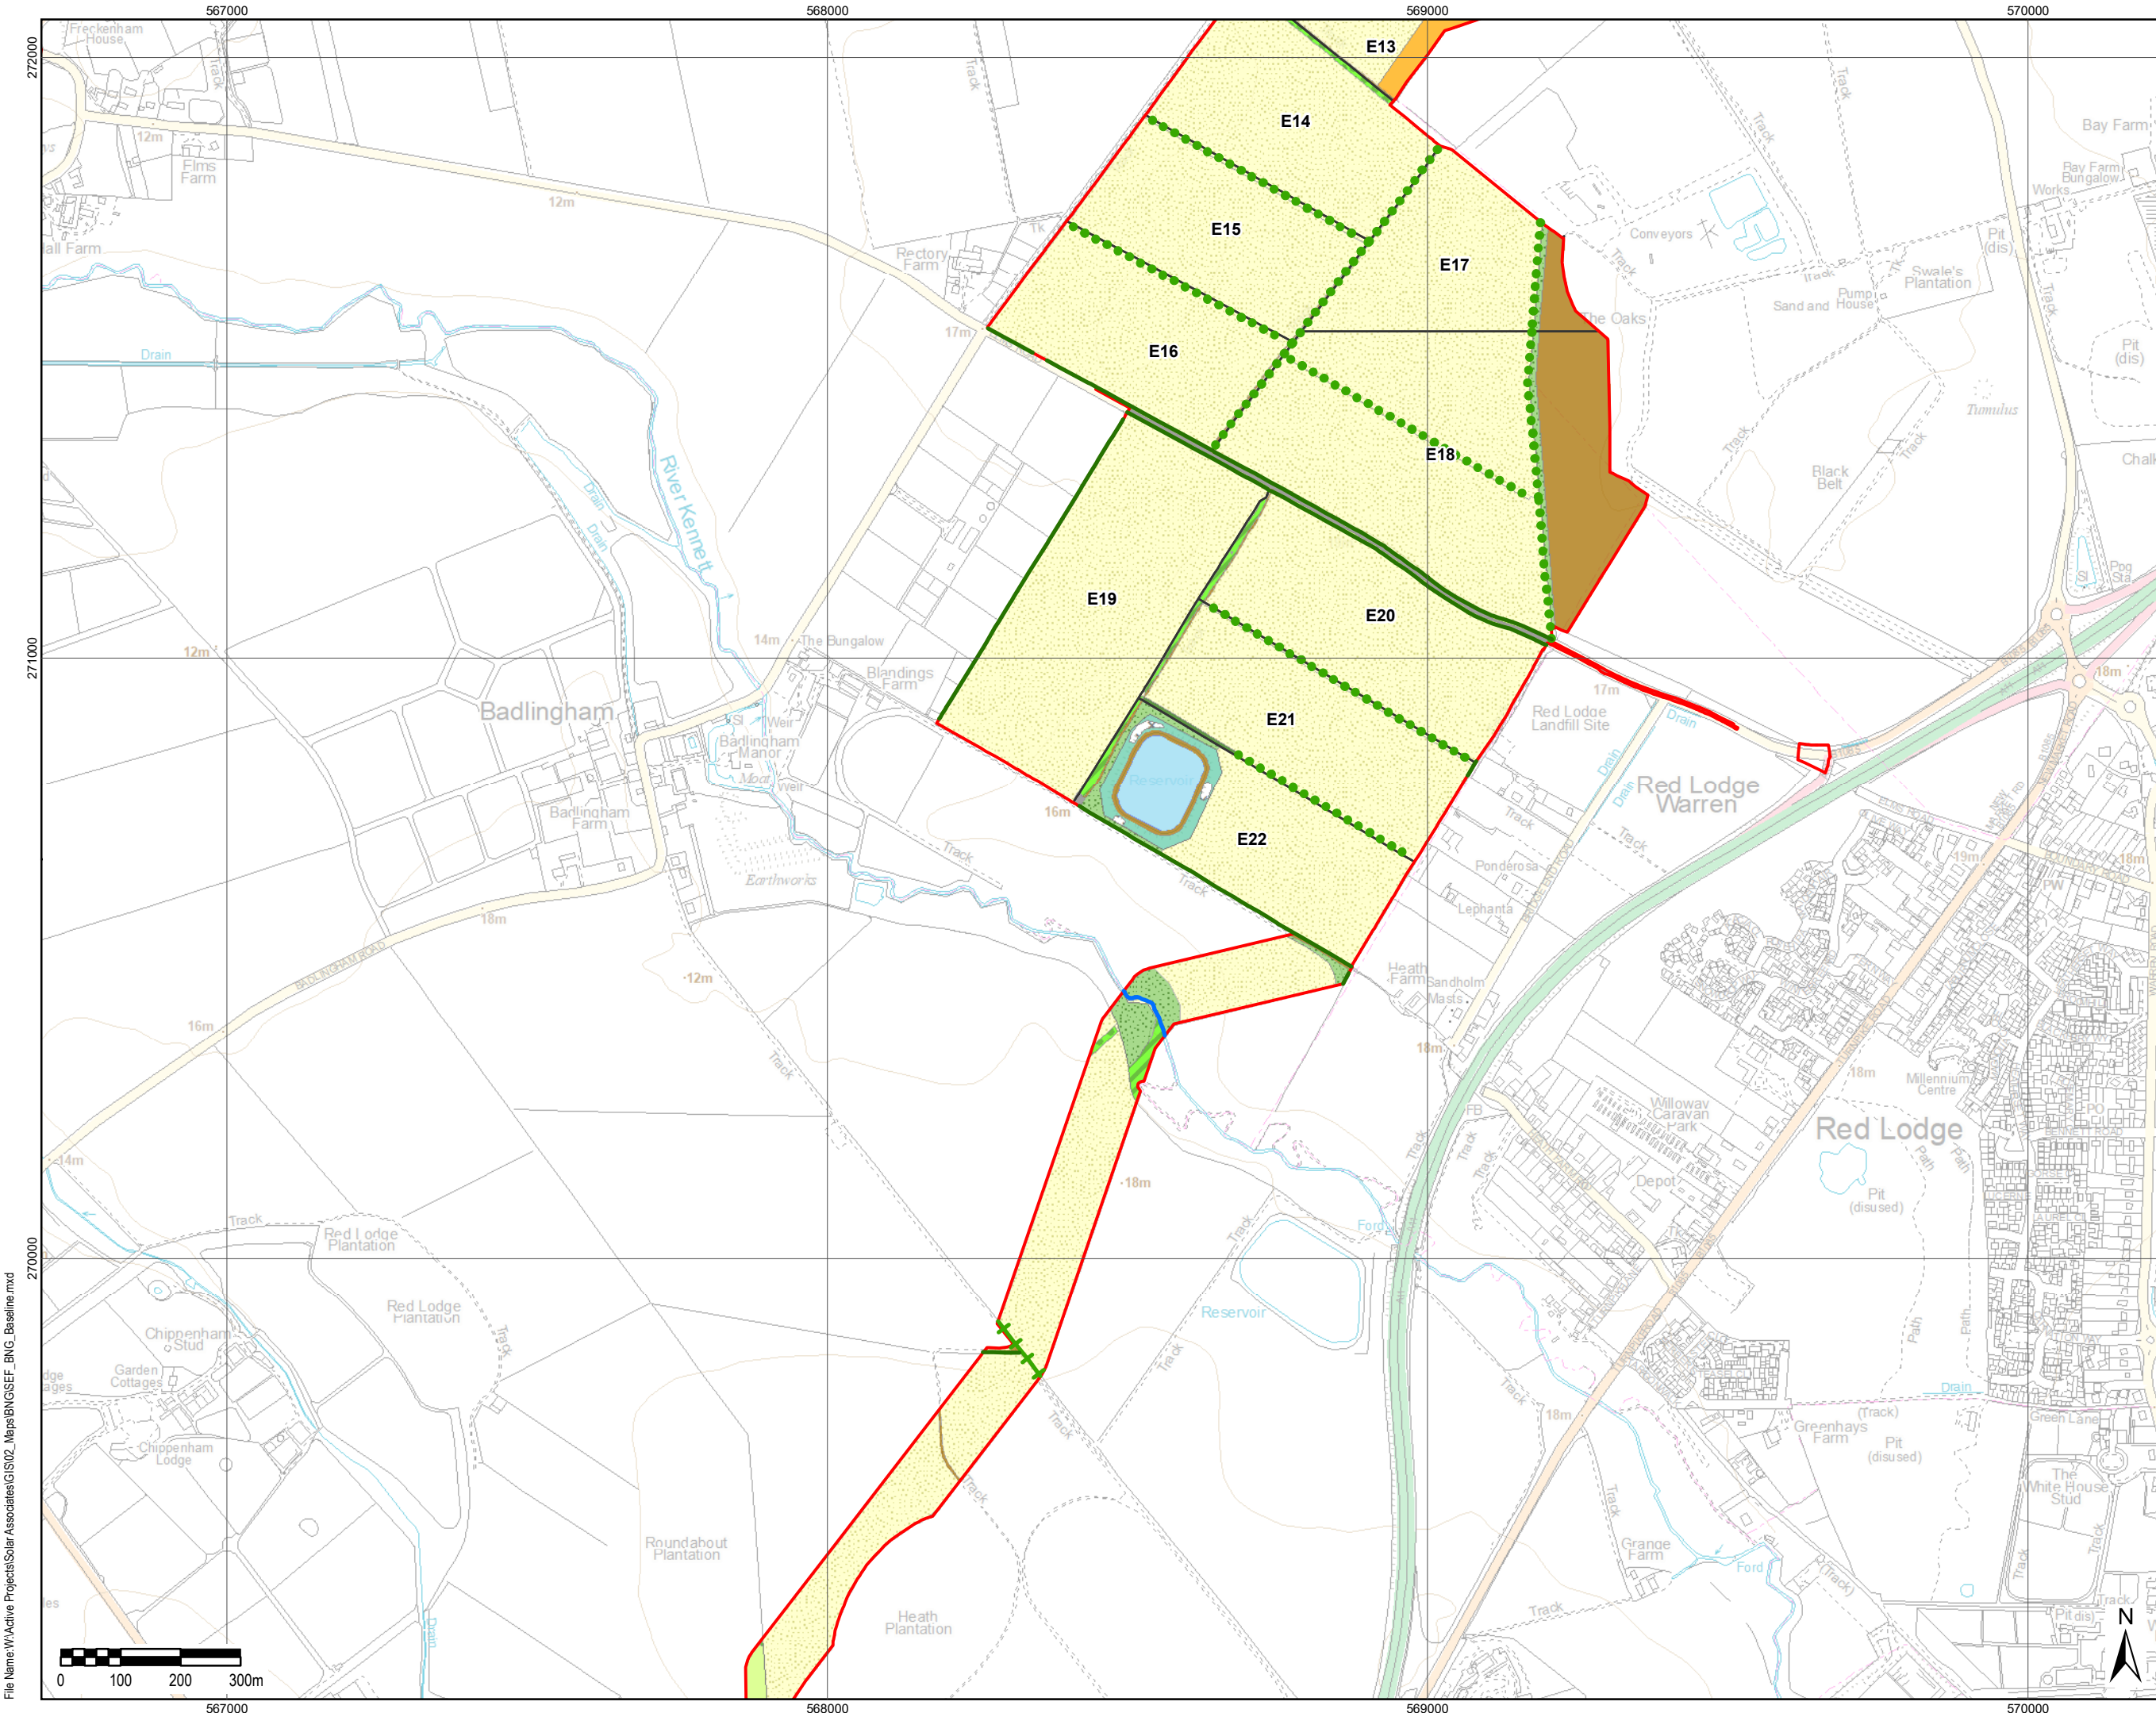

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description**
- Other woodland; broadleaved
- Lowland mixed deciduous woodland
- Other woodland; mixed
- Lowland calcareous grassland
- Other lowland acid grassland
- Other neutral grassland
- Modified grassland
- Ruderal/Ephemeral
- Cereal crops
- Other rivers and streams
- Ponds (Priority habitat)
- Vacant/derelict land/ bareground
- Developed land; sealed surface
- Line of trees
- Native hedgerow
- Native hedgerow with trees
- Other rivers and streams

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title

Drawing Title
BIODIVERSITY NET GAIN BASELINE

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.


AECOM
Unit 1 Wellbrook Court,
Oilton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number
FIGURE 1.4

Rev
0

File Name: \\Active Projects\\Solar Associates\\GIS02_Maps\\BNGSEF_BNG_Baseline.mxd

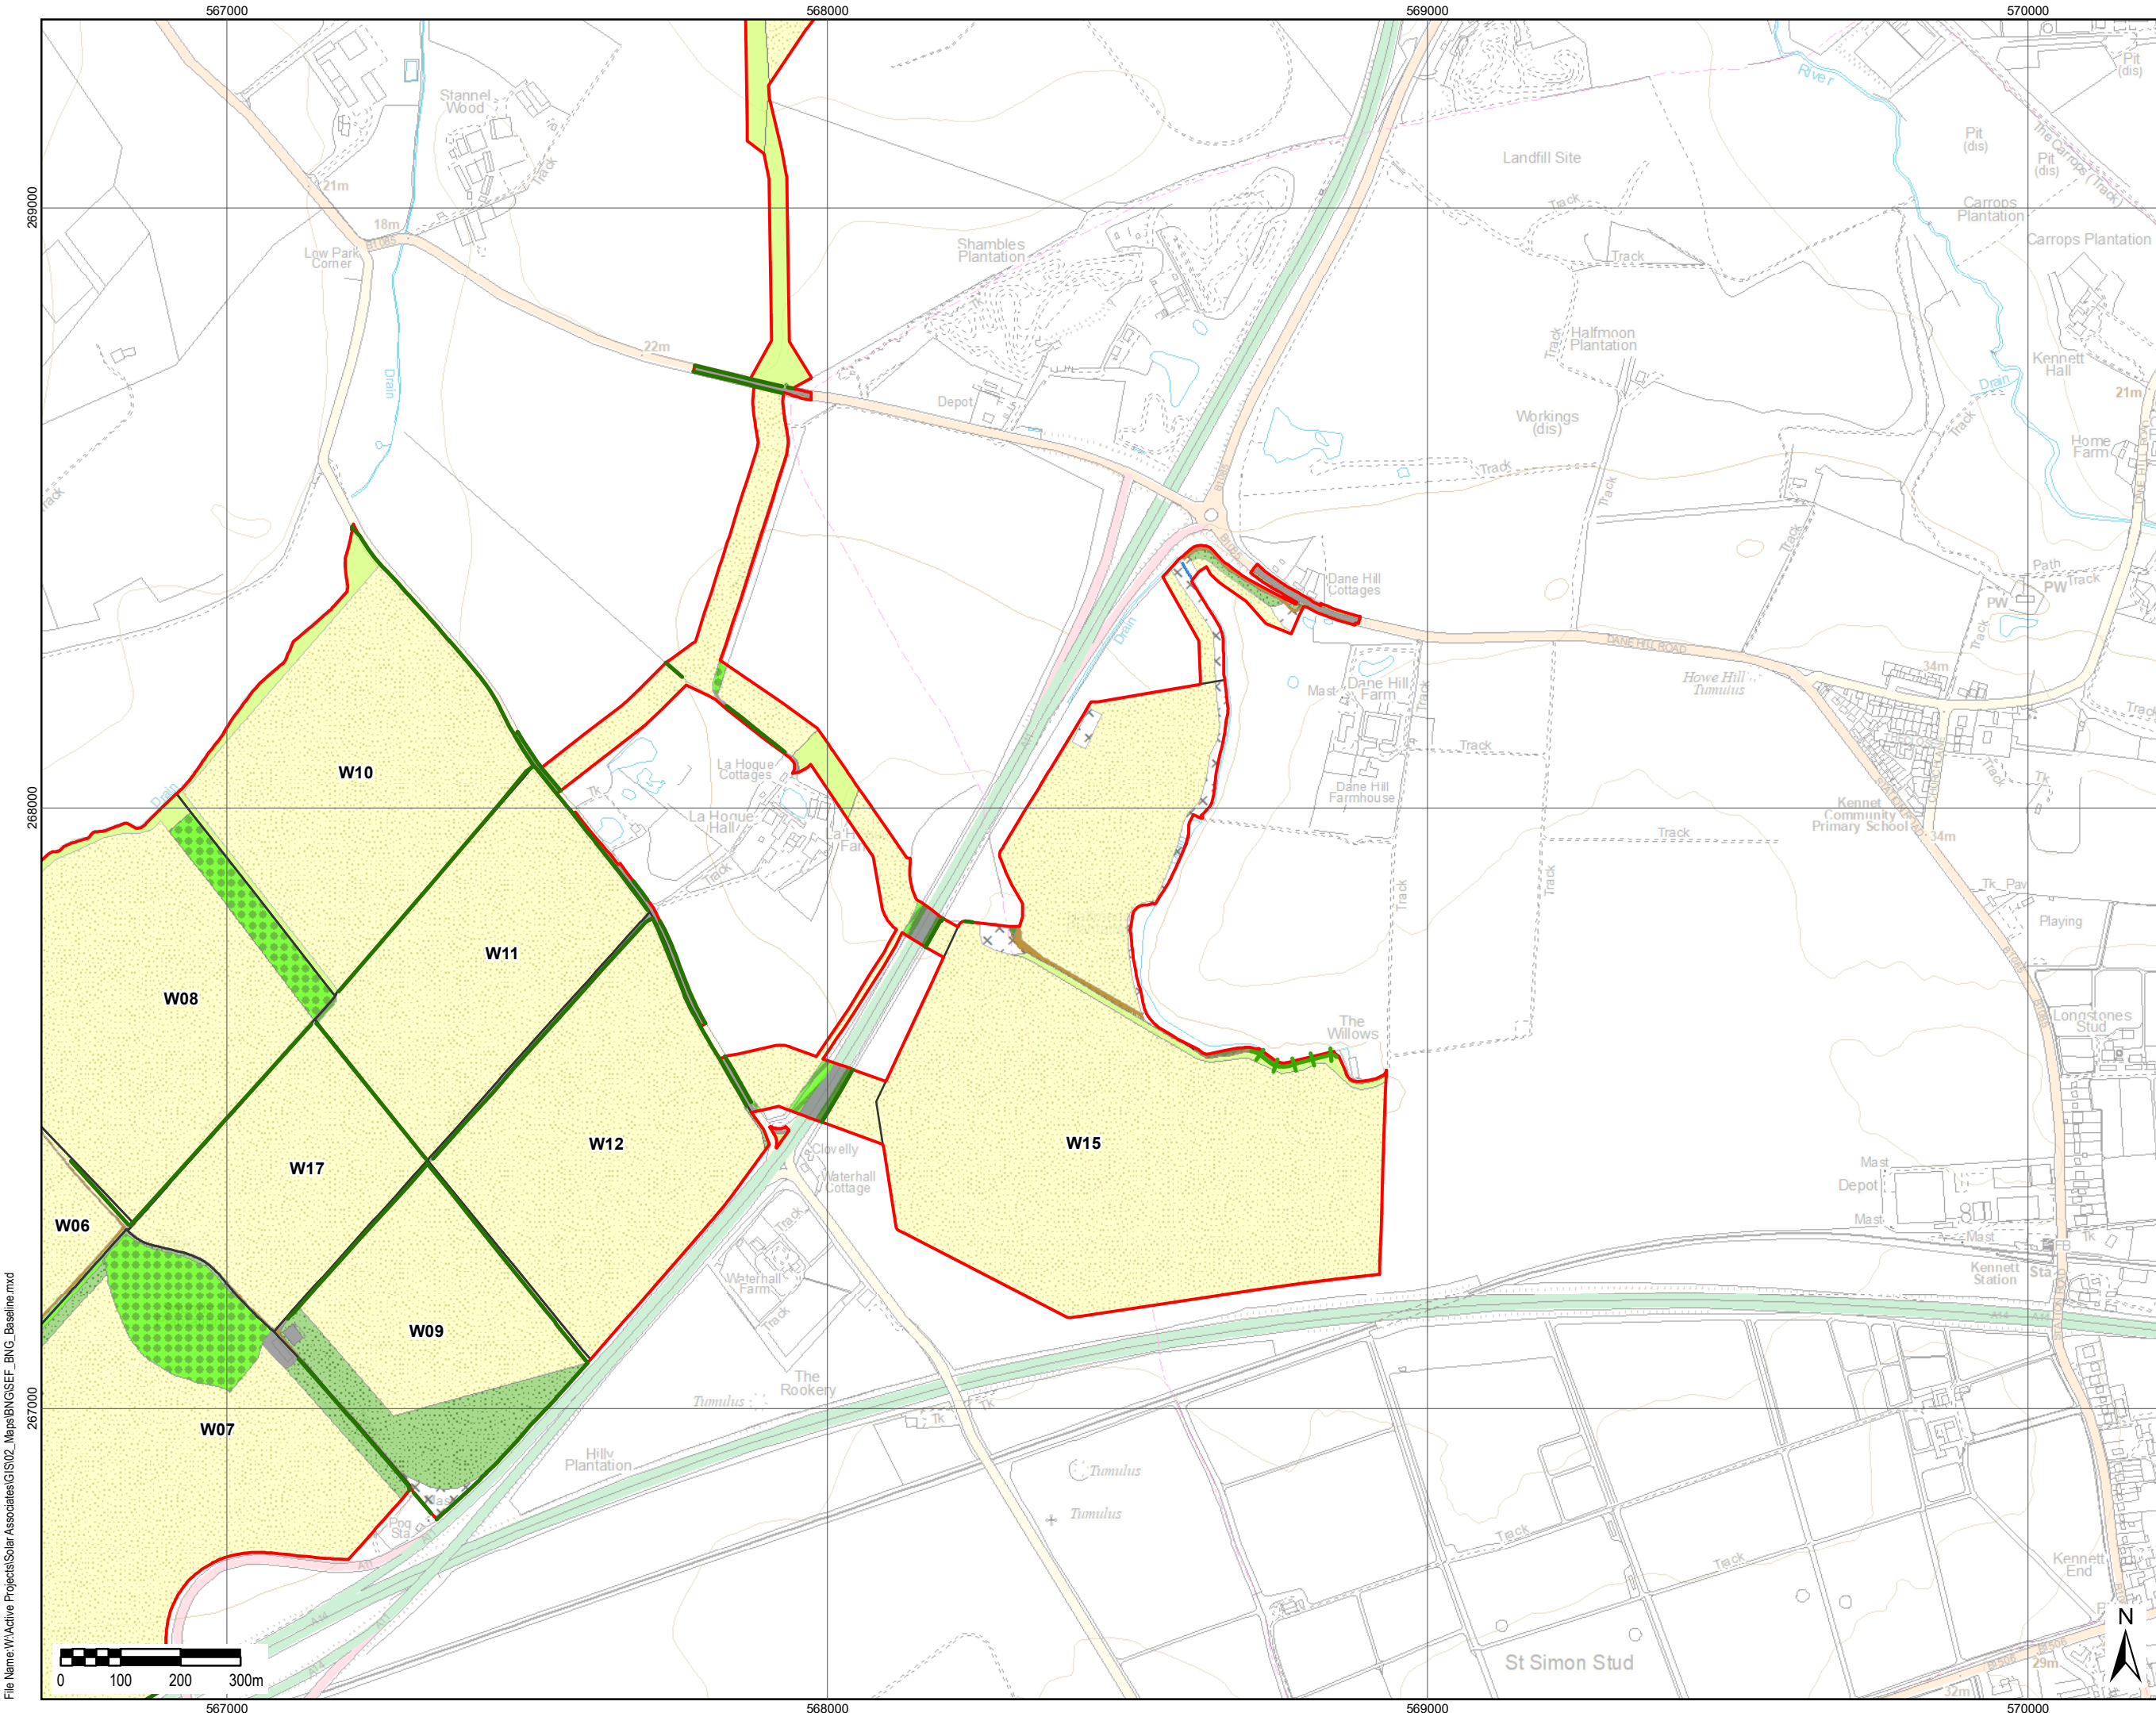

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Other neutral grassland
 - Modified grassland
 - Ruderal/Ephemeral
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Native hedgerow
 - Native hedgerow with trees

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue

FOR INFORMATION

Client

SUNNICA LTD

Project Title

Drawing Title

BIODIVERSITY NET GAIN BASELINE

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.


AECOM

Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

Drawing Number	Rev
FIGURE 1.5	0

File Name: W:\Active Projects\Solar Associates\GIS\02_Maps\BNGSEF_BNG_Baseline.mxd

File Name: W:\Active Projects\Solar Associates\GIS\02_Maps\BINGSEF_BNG_Baseline.mxd

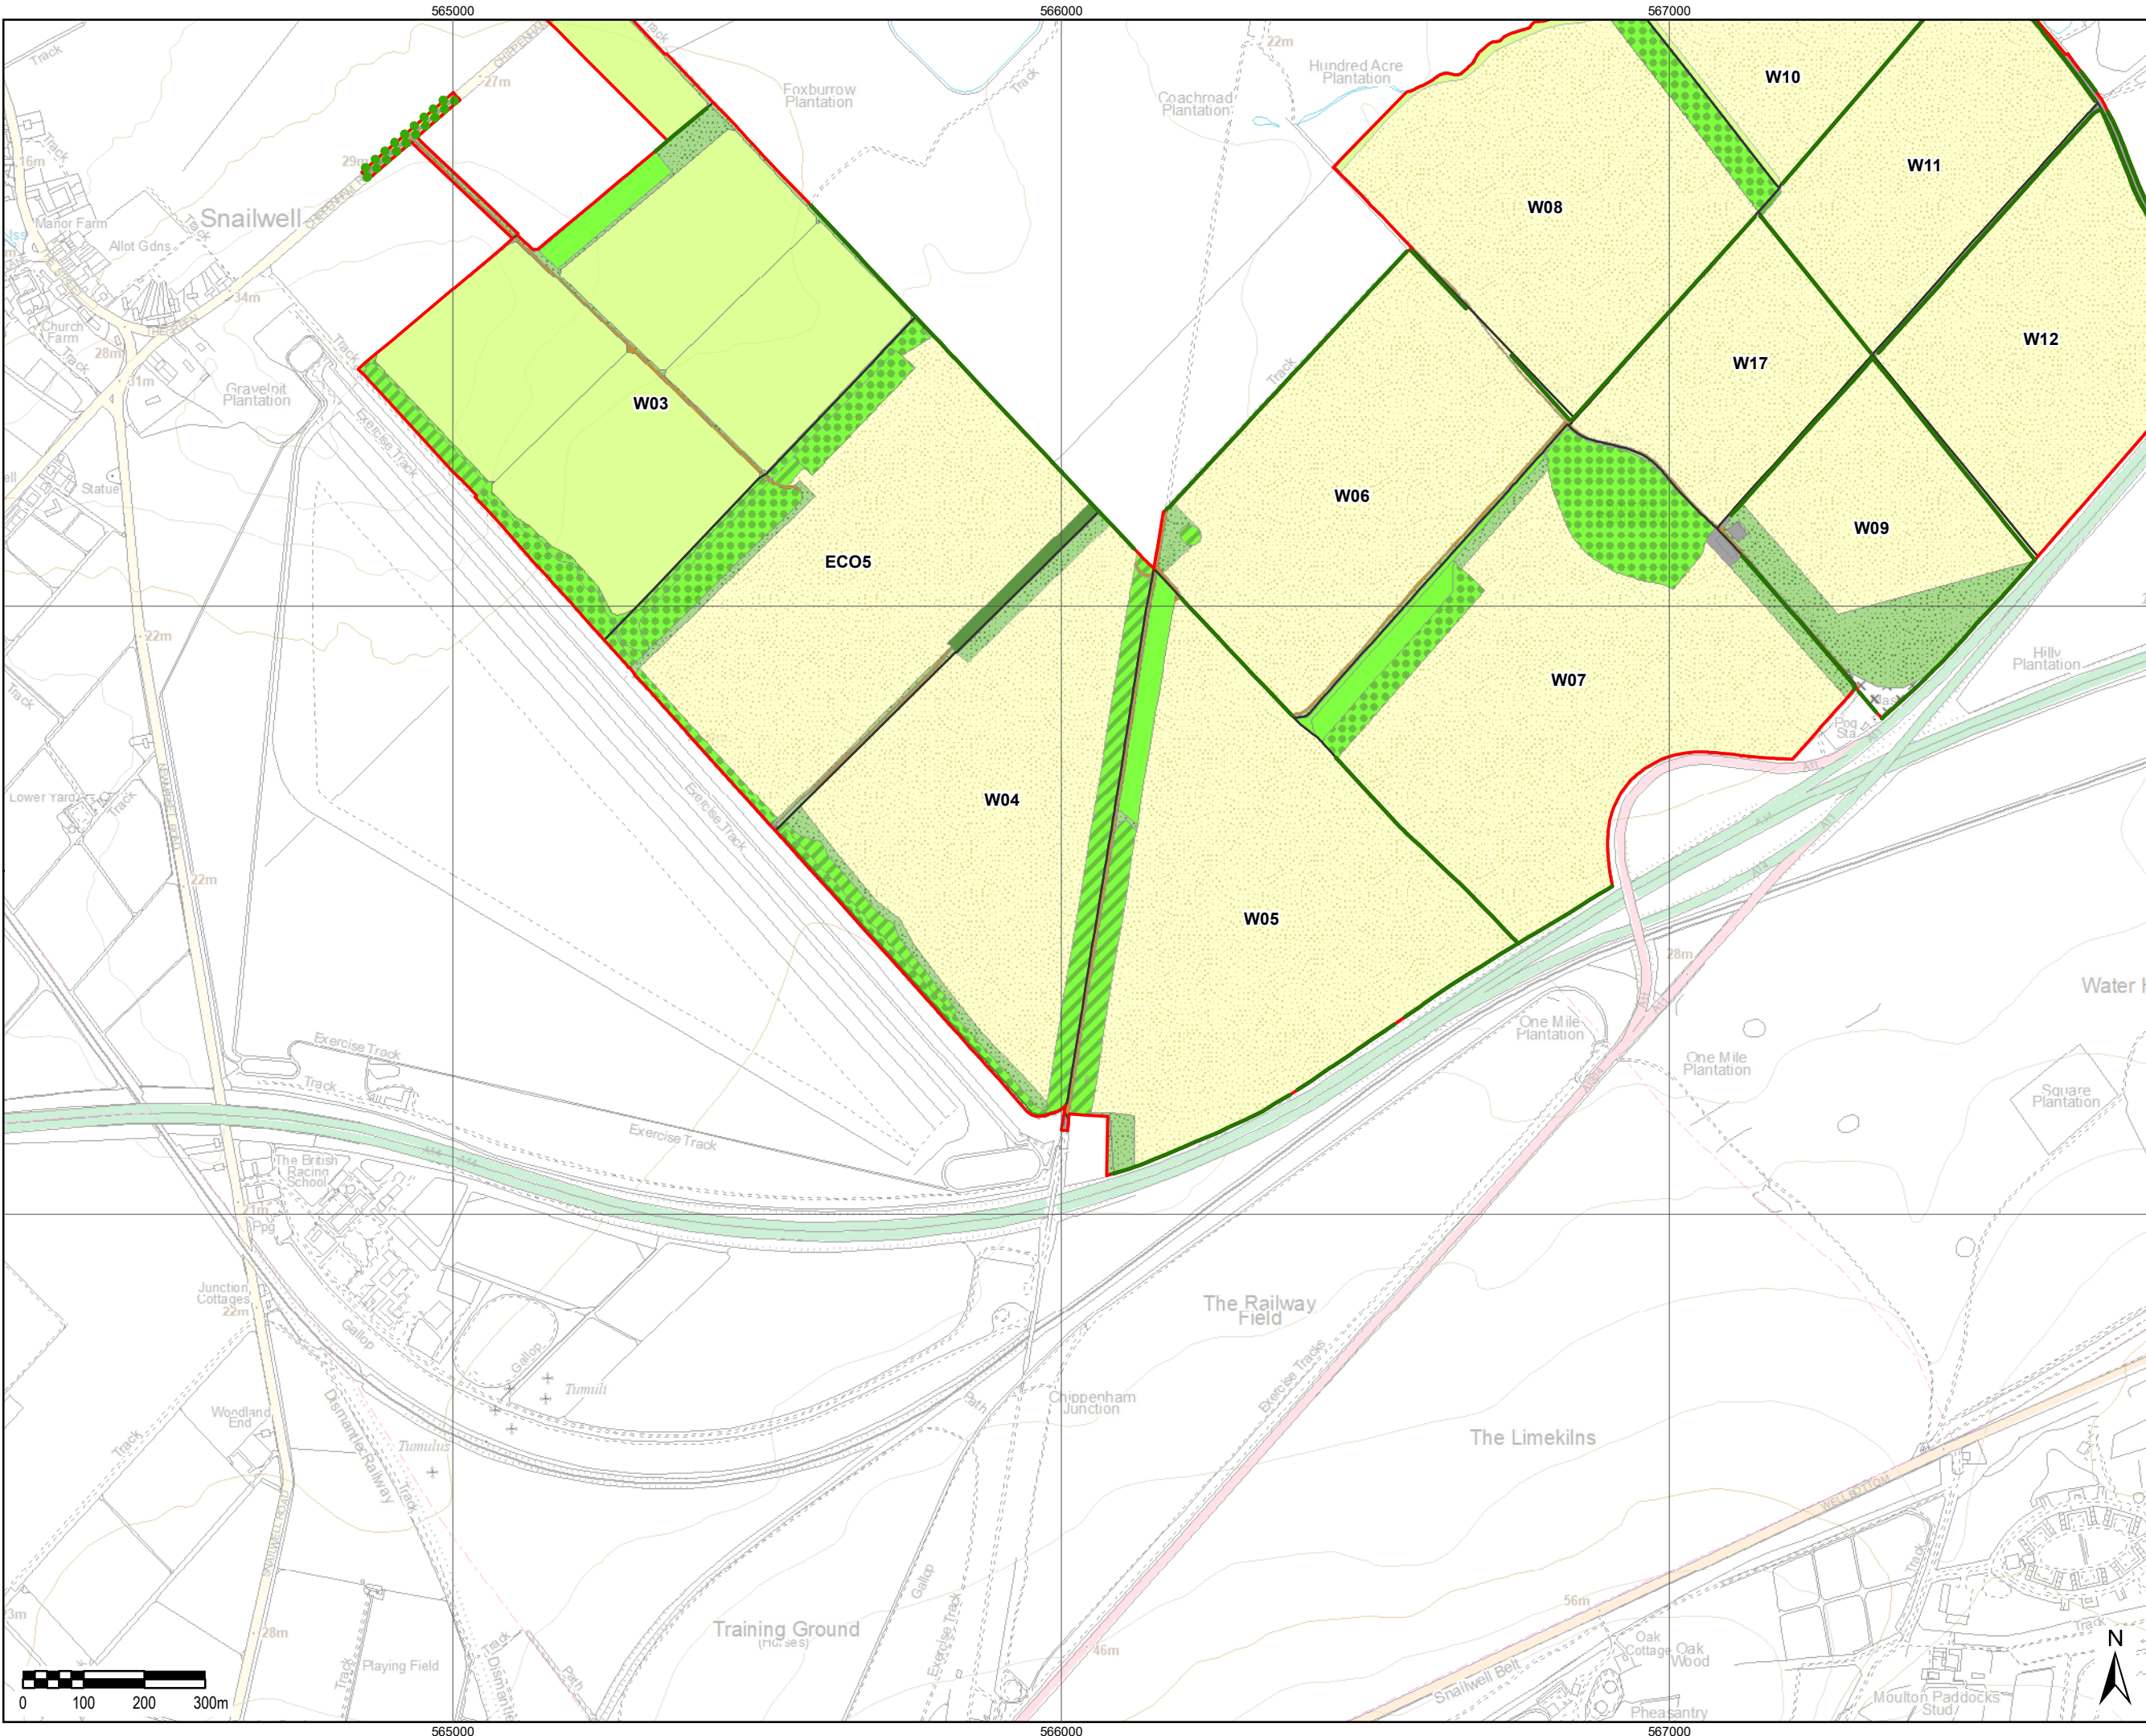

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

Order Limits

Field Reference Boundary

UK Habitat Description

Other woodland; broadleaved

Other coniferous woodland

Lowland mixed deciduous woodland

Other woodland; mixed

Mixed scrub

Other neutral grassland

Modified grassland

Ruderal/Ephemeral

Cereal crops


Other rivers and streams

Vacant/derelict land/ bareground

Developed land; sealed surface

Line of trees

Native hedgerow



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue

FOR INFORMATION

Client

SUNNICA LTD

Project Title

Drawing Title

BIODIVERSITY NET GAIN
BASELINE

Drawn

BF

Checked

JW

Approved

ML

Date

02/03/2023

AECOM Internal Project No.

60589004

Scale @ A3

1:10,000

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM

Unit 1 Wellbrook Court,

Girton,

Cambridge, CB3 0NA

United Kingdom

Telephone (01223) 488000


www.aecom.com

Drawing Number

FIGURE 1.6

Rev

0

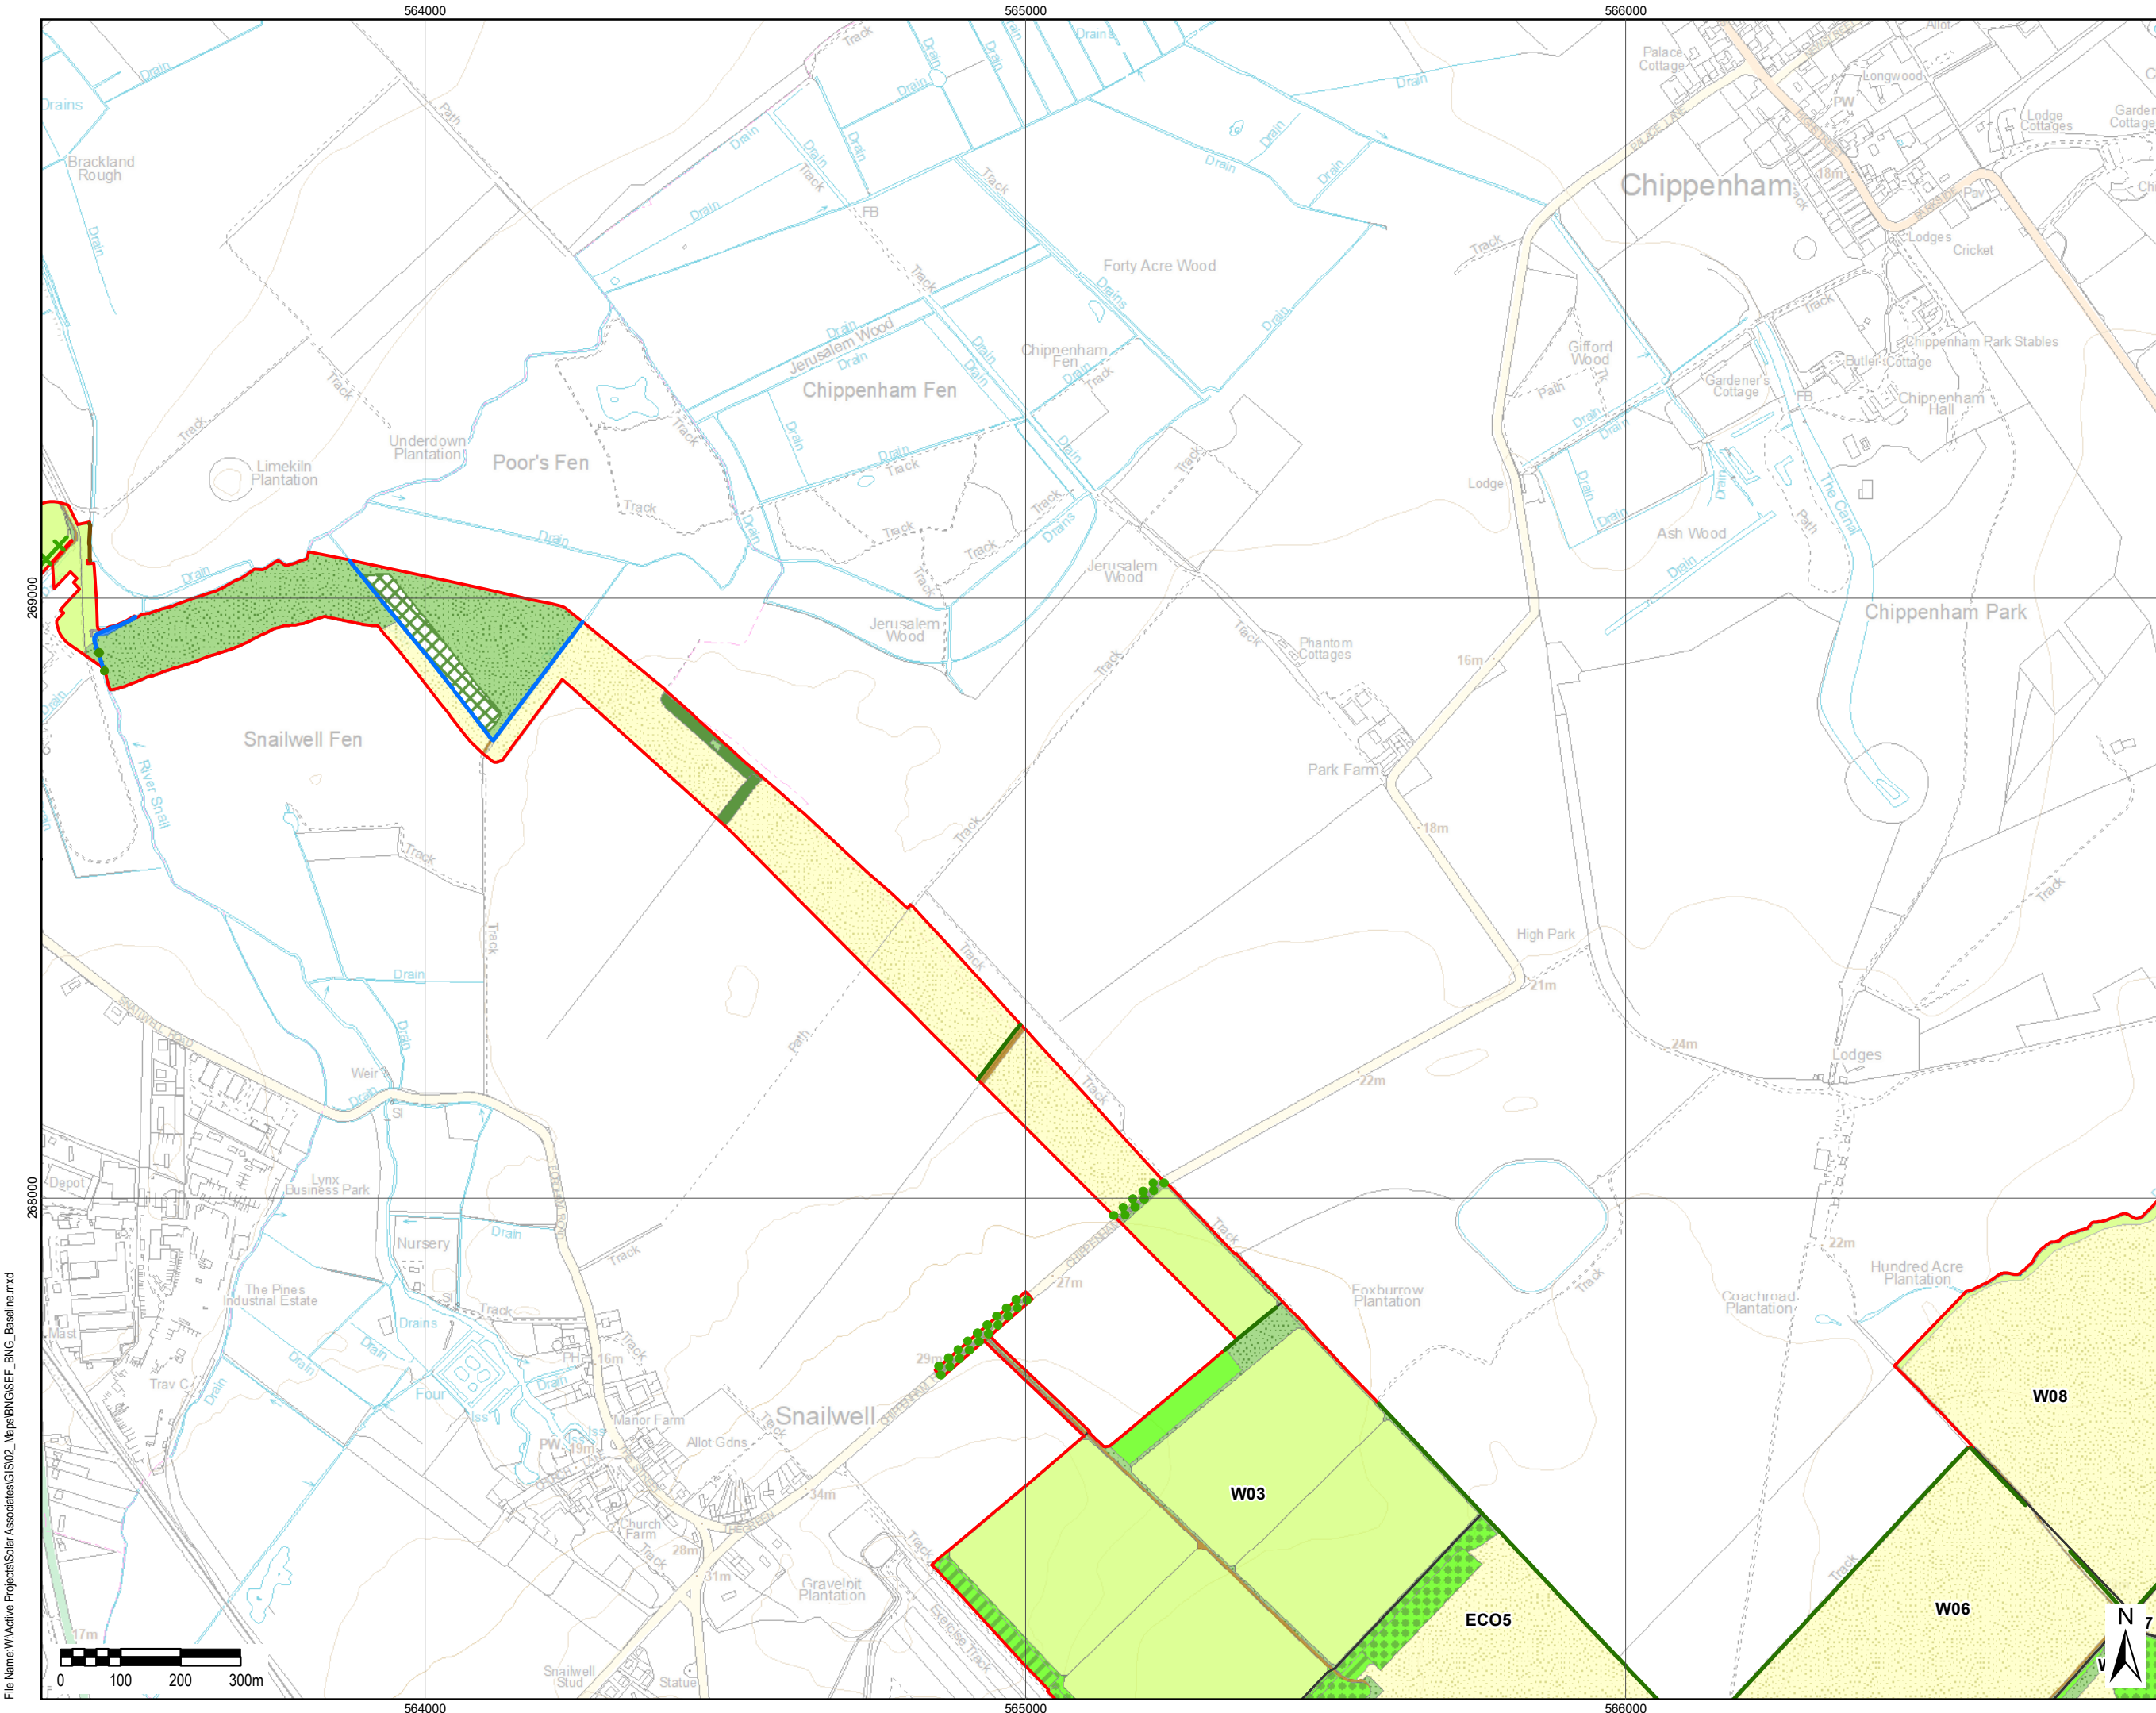

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Mixed scrub
 - Other neutral grassland
 - Modified grassland
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
- Line of trees
- Native hedgerow
- Native hedgerow; with ditch
- Native hedgerow with trees
- Other rivers and streams
- Urban tree

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title


Drawing Title
BIODIVERSITY NET GAIN BASELINE

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.


AECOM
Unit 1 Wellbrook Court,
Gorton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number
FIGURE 1.7

Rev
0

File Name: \\Active Projects\\Solar Associates\\GIS02_Maps\\BINGSEF_BNG_Baseline.mxd

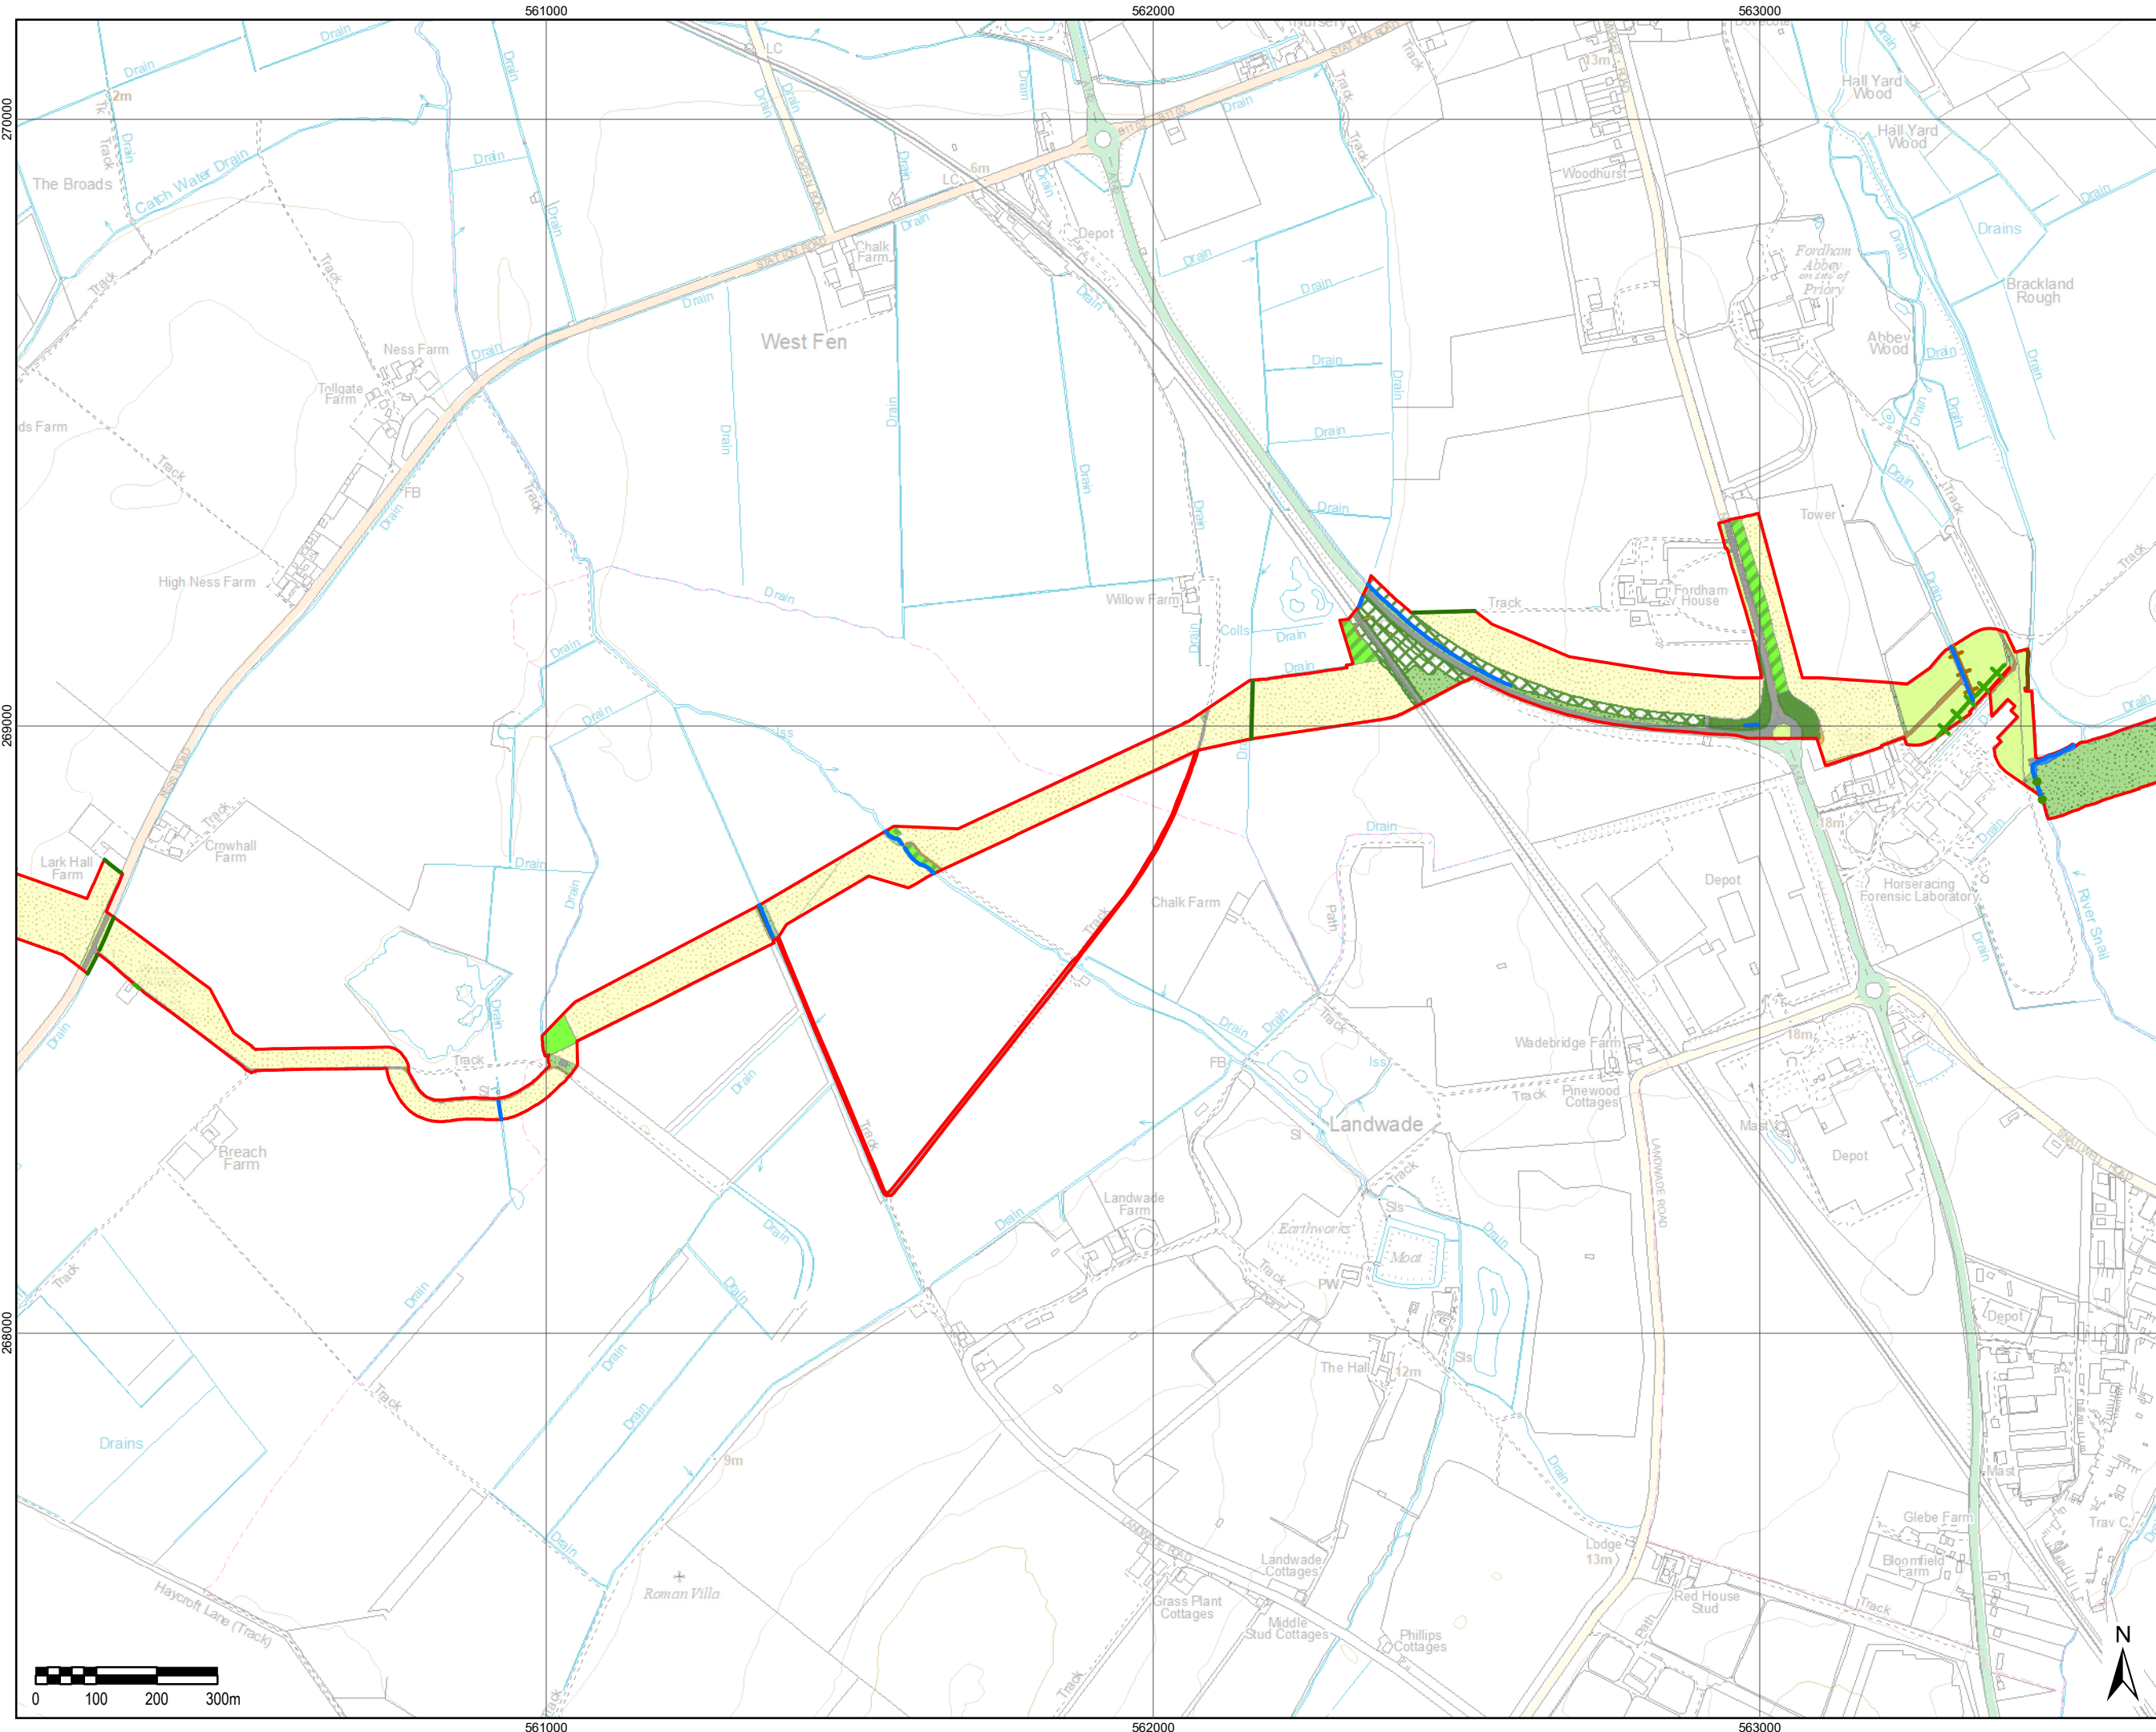


THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- UK Habitat Description
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Mixed scrub
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Native hedgerow
 - Native hedgerow; with ditch
 - Native hedgerow with trees
 - Native hedgerow with trees; with ditch
 - Other rivers and streams
 - Urban tree

Sheet Layout



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title


Drawing Title
**BIODIVERSITY NET GAIN
BASELINE**


Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number FIGURE 1.8	Rev 0
-------------------------------------	-----------------

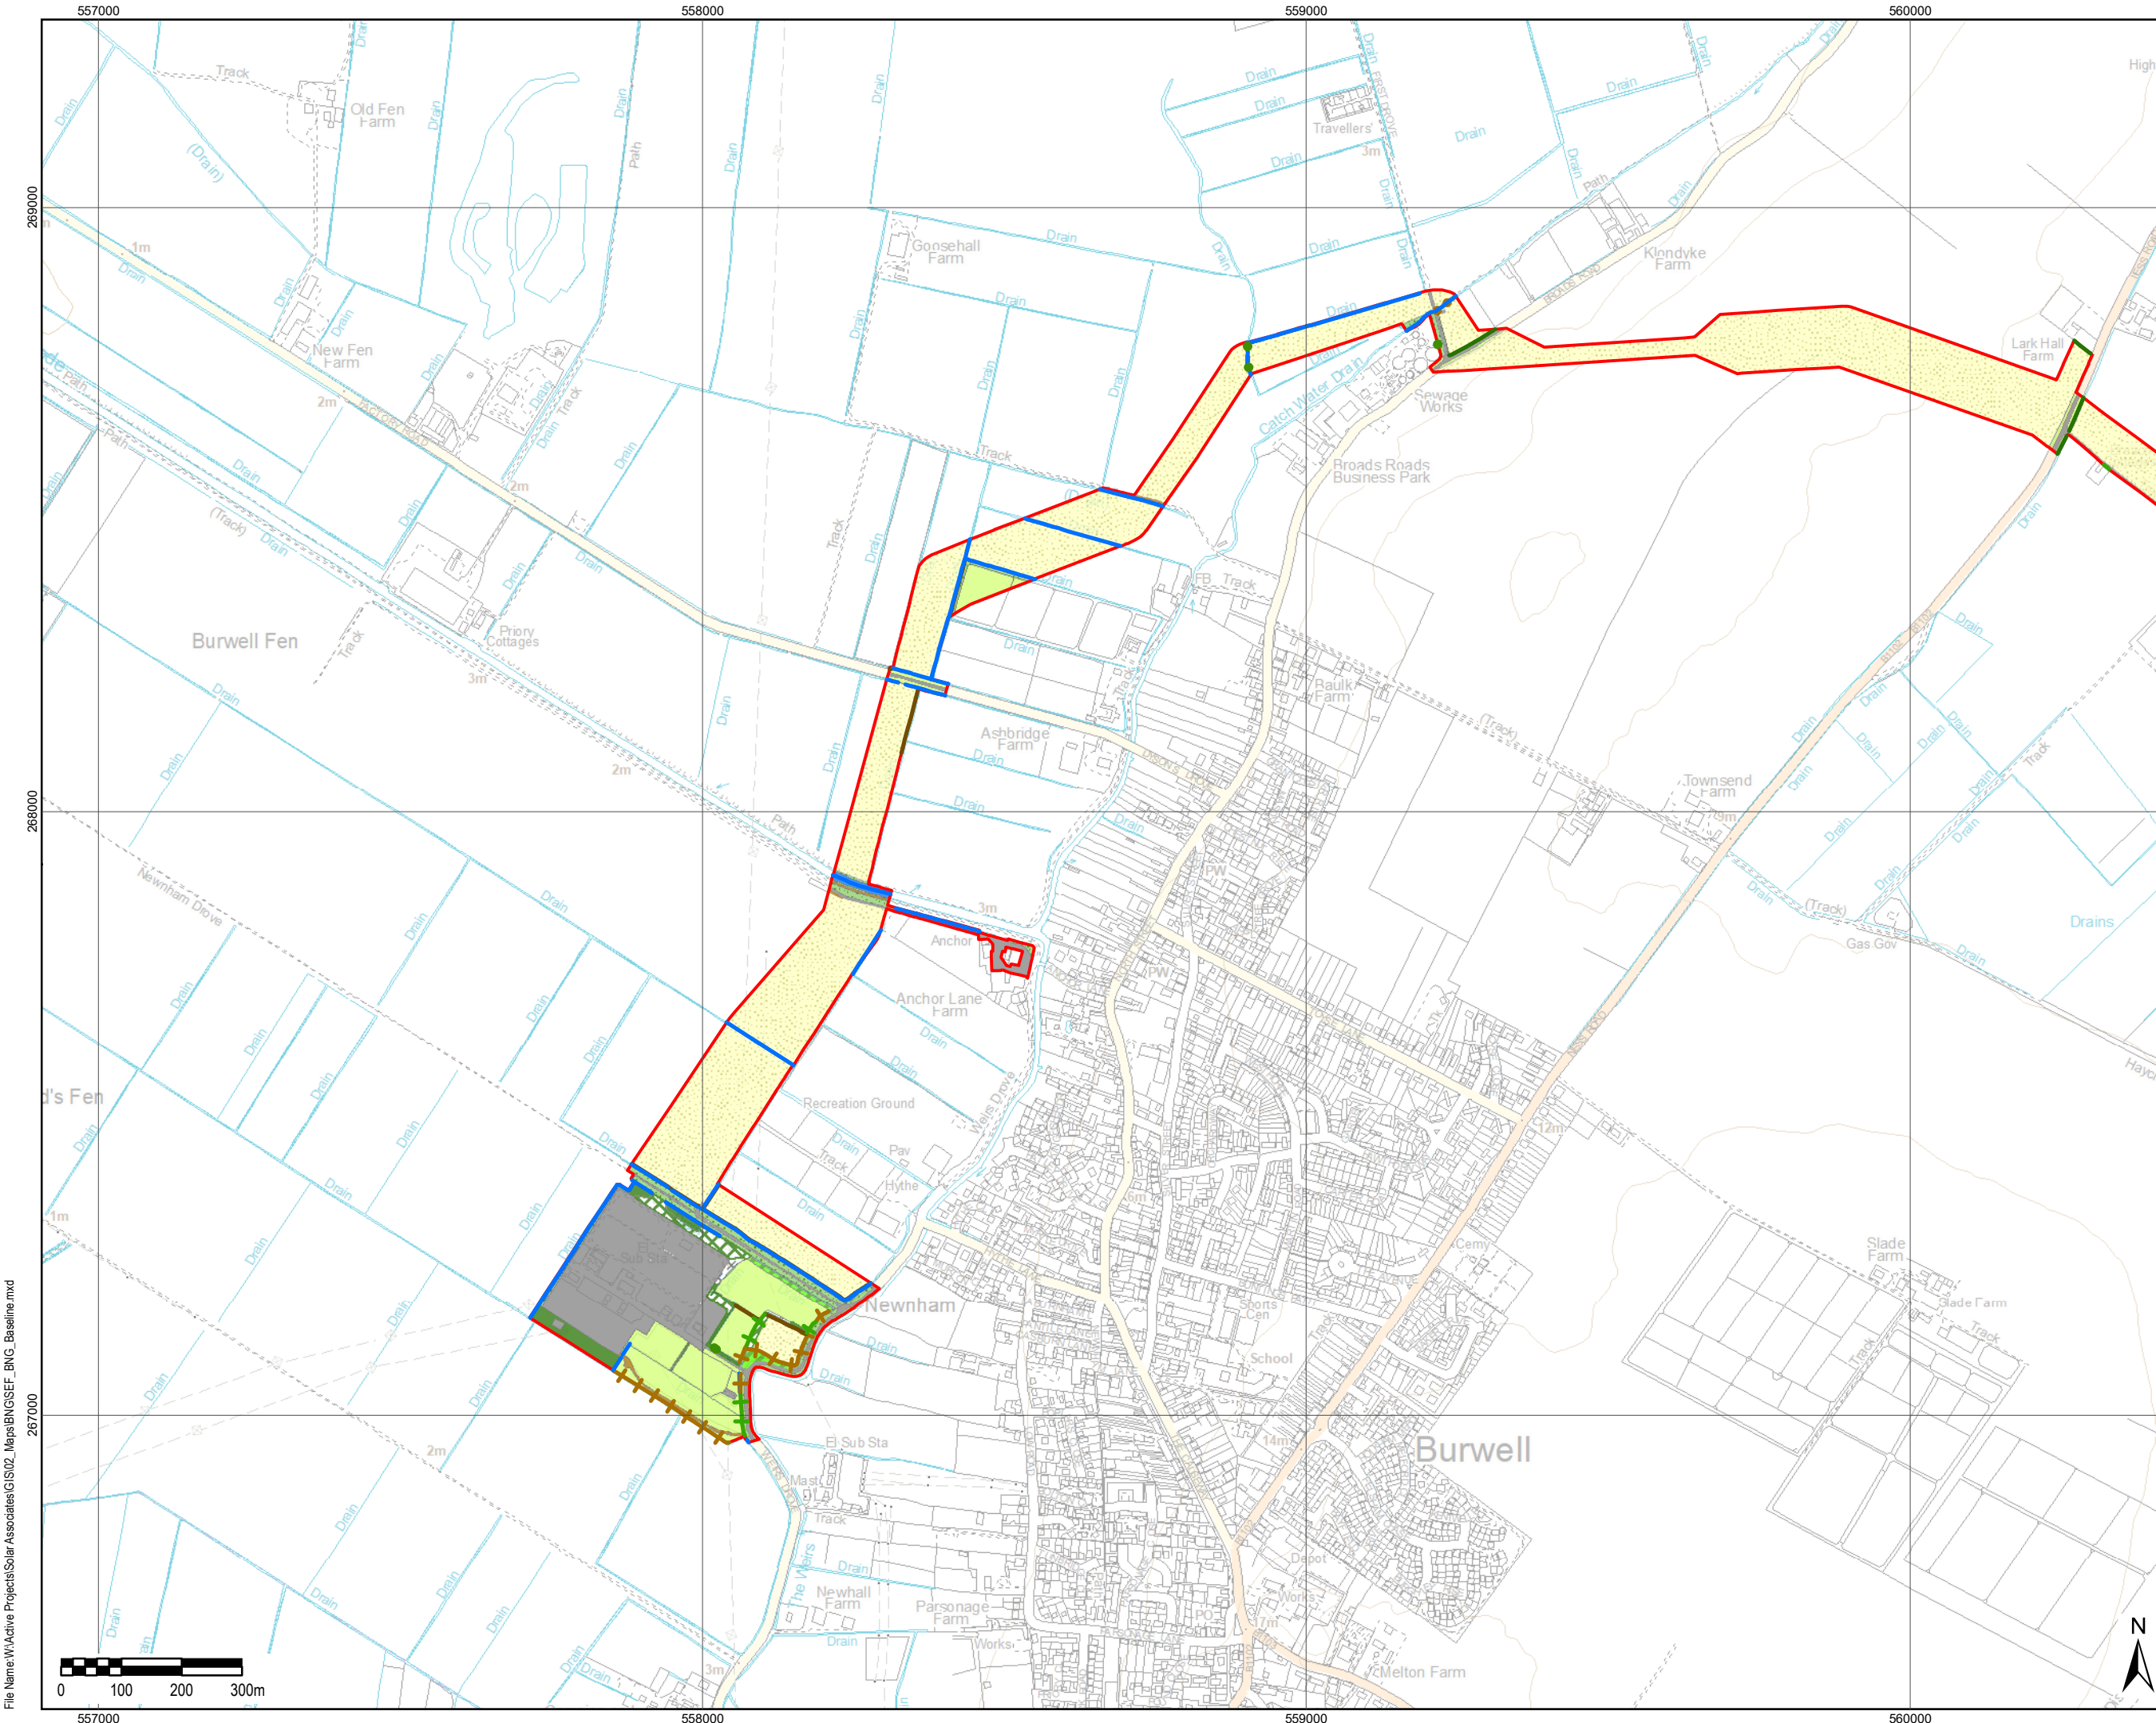

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- UK Habitat Description**
 - Other woodland; broadleaved
 - Lowland mixed deciduous woodland
 - Mixed scrub
 - Other neutral grassland
 - Modified grassland
 - Ruderal/Ephemeral
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Line of trees; with ditch
 - Native hedgerow
 - Native hedgerow; with ditch
 - Native hedgerow with trees
 - Native hedgerow with trees; with ditch
 - Other rivers and streams
 - Urban tree

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue

FOR INFORMATION

Client

SUNNICA LTD

Project Title

Drawing Title

BIODIVERSITY NET GAIN BASELINE

Drawn	Checked	Approved	Date
BF	JW	ML	02/03/2023

AECOM Internal Project No. 60589004

Scale @ A3 1:10,000

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

Drawing Number


FIGURE 1.9

Rev

0

File Name: \\Active Projects\\Solar Associates\\GIS\\02_Maps\\BNGSEF_BNG_Baseline.mxd

Appendix C Post Development Biodiversity Net Gain Plans

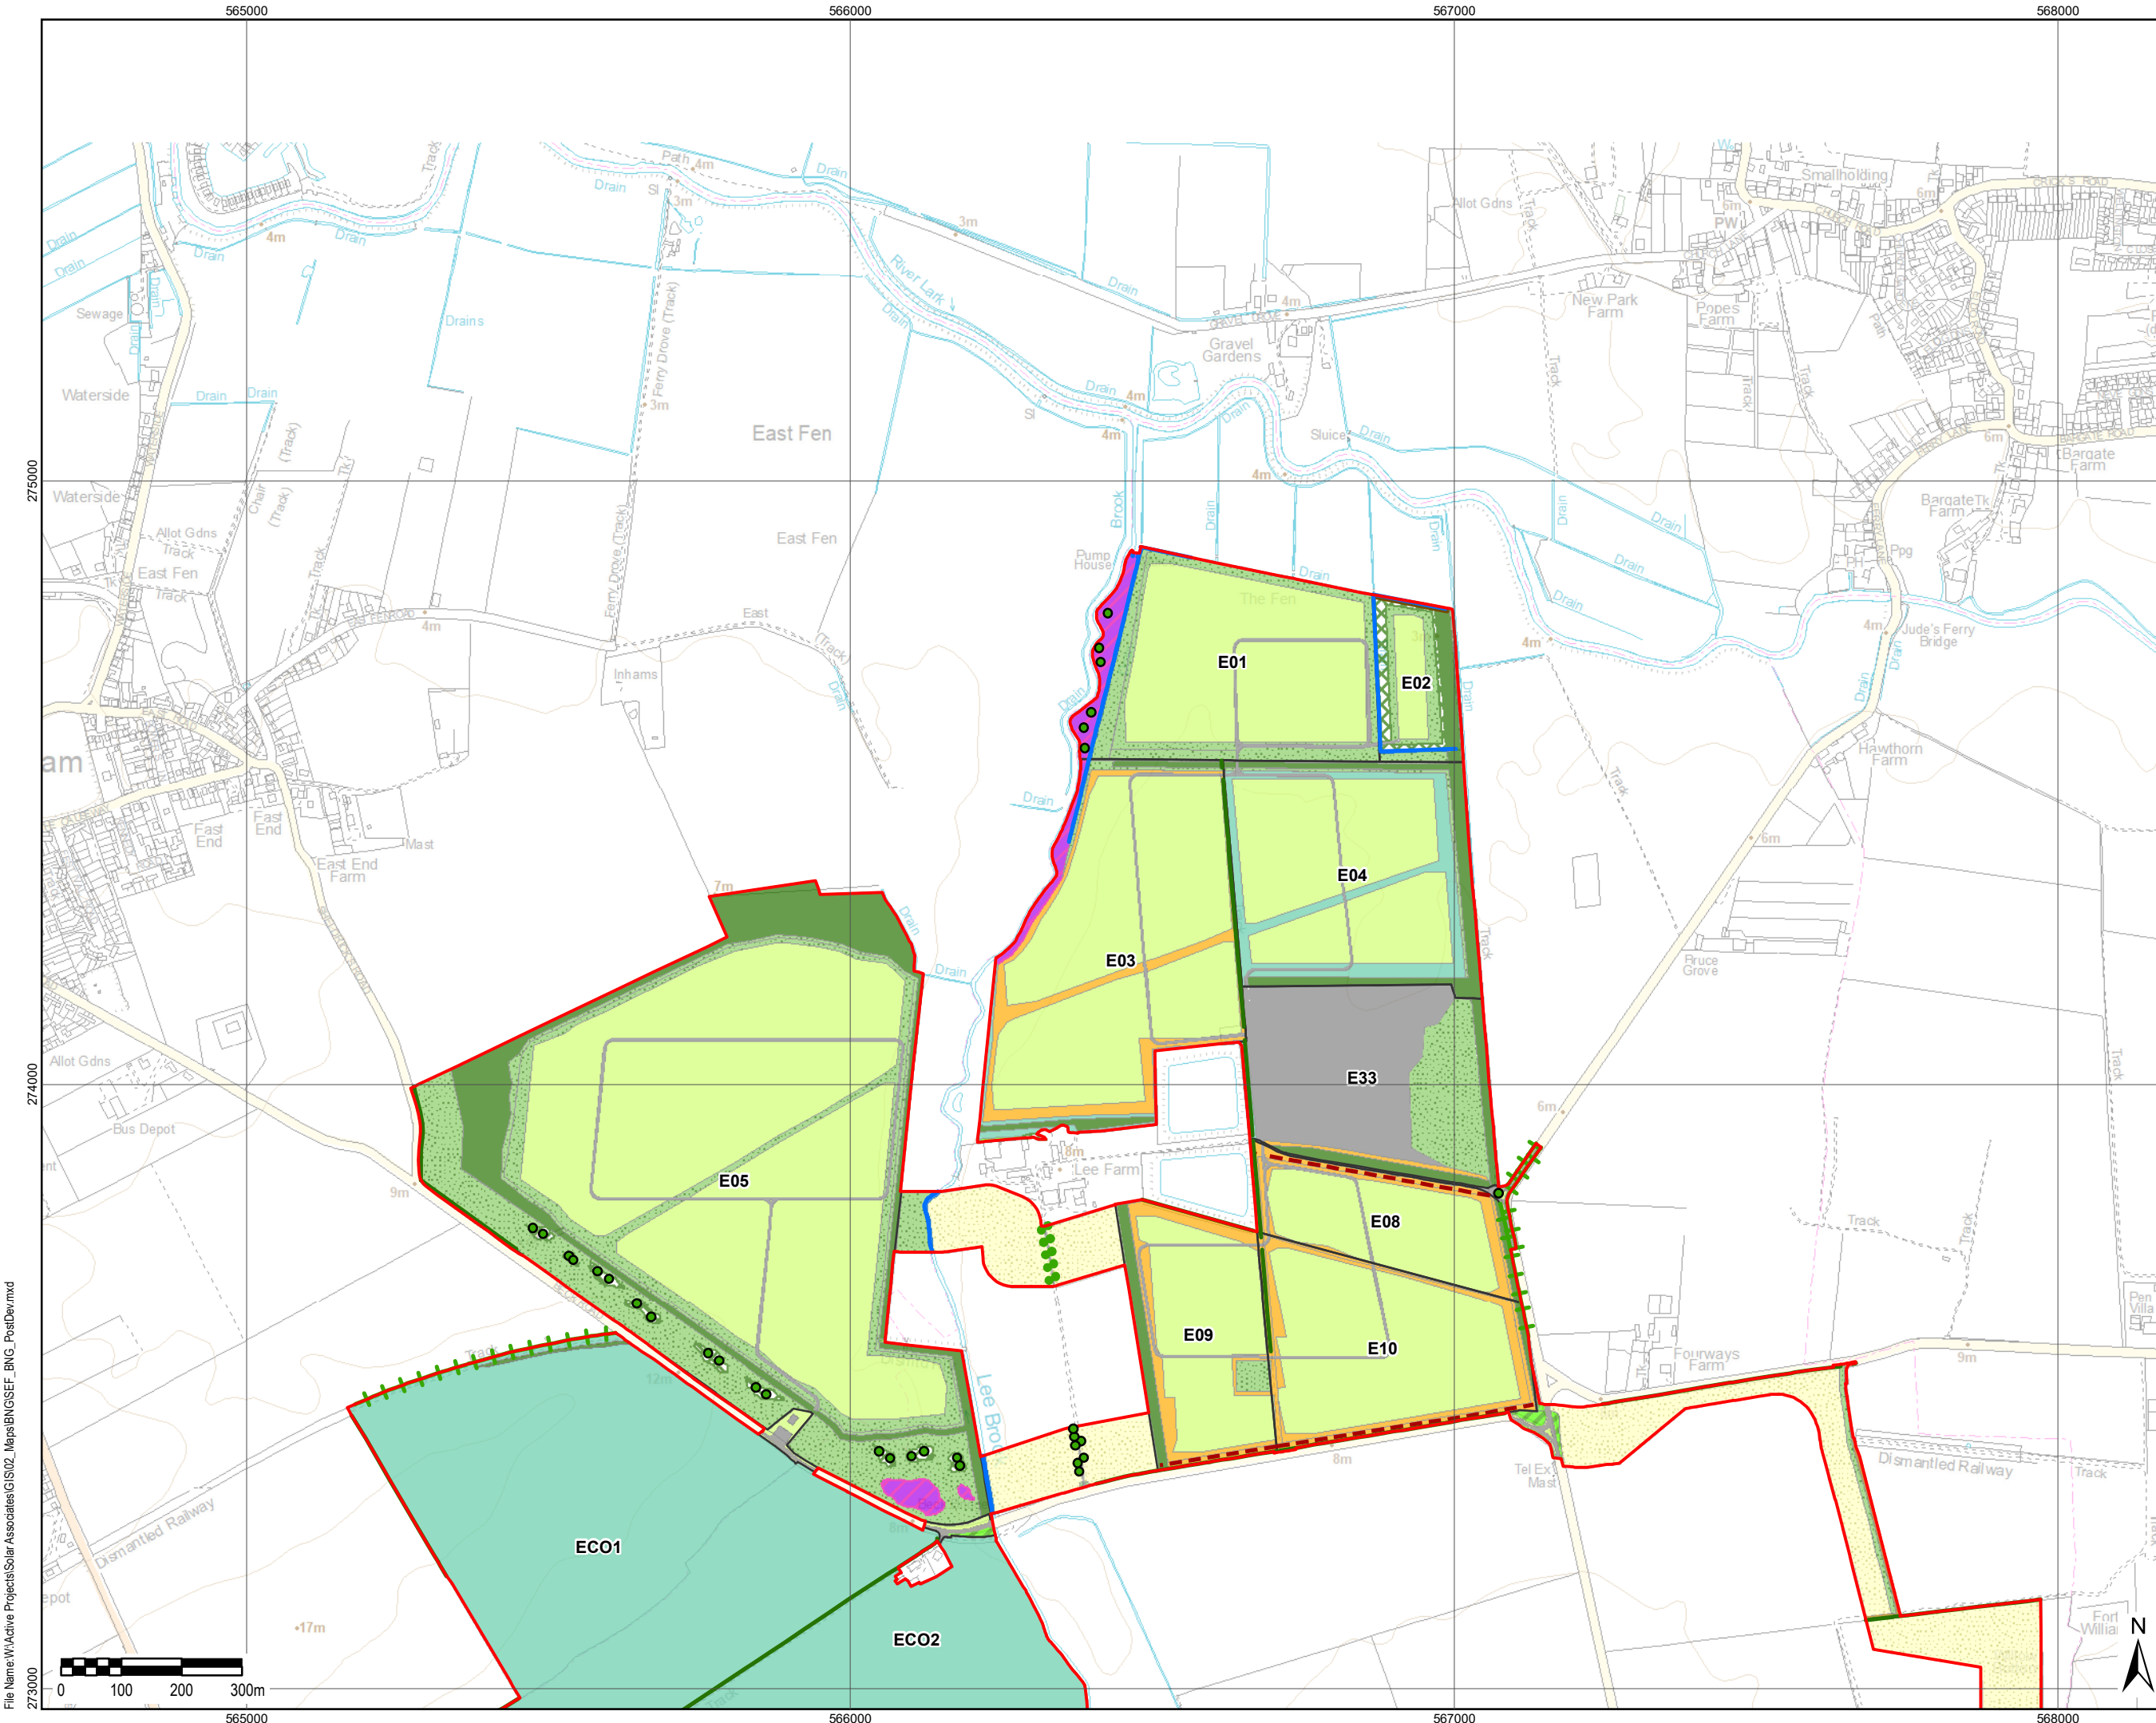

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

Order Limits

Field Reference Boundary

UK Habitat Description

Other woodland; broadleaved

Other coniferous woodland

Lowland mixed deciduous woodland

Mixed scrub

Lowland calcareous grassland

Other lowland acid grassland

Other neutral grassland

Modified grassland

Purple moor grass and rush pastures

Cereal crops

Other rivers and streams

Vacant/derelict land/ bareground

Developed land; sealed surface

Line of trees

Native Species Rich Hedgerow

Native hedgerow

Native hedgerow; with ditch

Native hedgerow with trees

Other rivers and streams

Urban tree

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue

FOR INFORMATION

Client

SUNNICA LTD

Project Title

Drawing Title

BIODIVERSITY NET GAIN
POST DEVELOPMENT

Drawn
BF

Checked
JW

Approved
ML

Date
02/03/2023

AECOM Internal Project No.
60589004

Scale @ A3
1:10,000

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND IS SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM

Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com


Drawing Number

FIGURE 2.1

Rev


0

File Name: \\Active Projects\\Solar Associates\\GIS02_Maps\\BNGSEF_BNG_PostDev.mxd

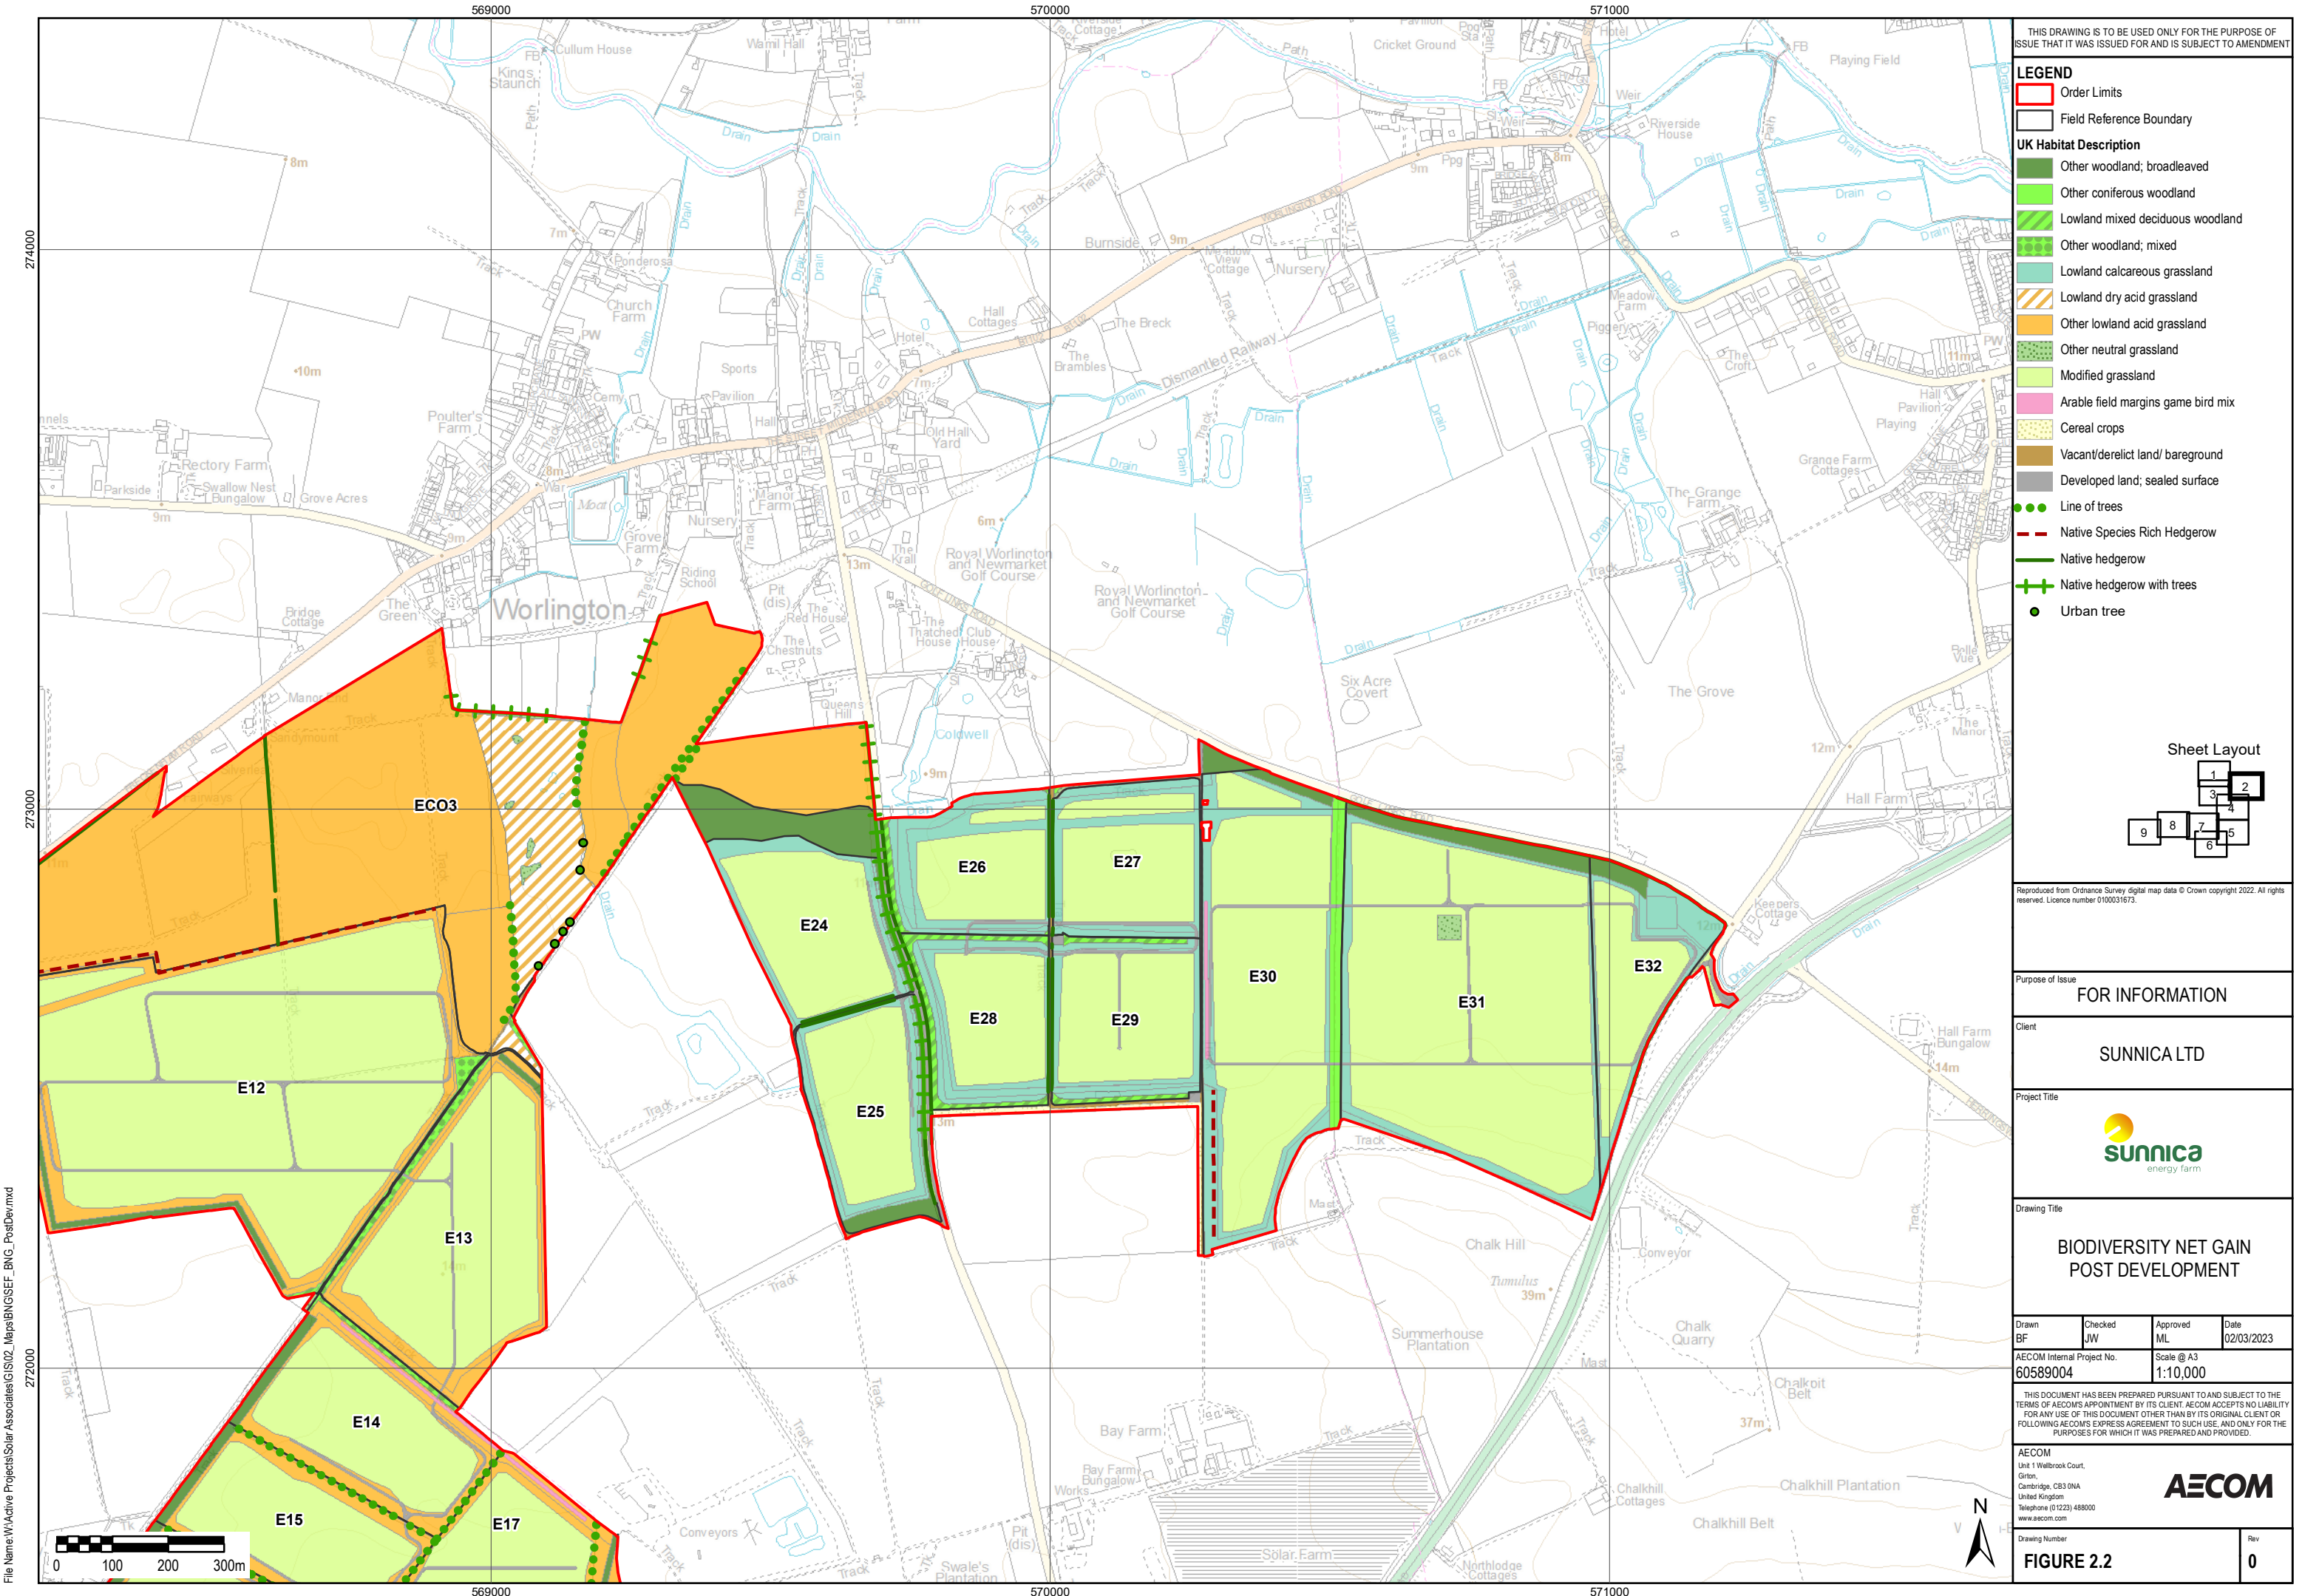

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

- LEGEND**
- Order Limits
 - Field Reference Boundary
 - UK Habitat Description**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Lowland calcareous grassland
 - Lowland dry acid grassland
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Arable field margins game bird mix
 - Cereal crops
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Line of trees
 - Native Species Rich Hedgerow
 - Native hedgerow
 - Native hedgerow with trees
 - Urban tree



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD



Drawing Title
**BIODIVERSITY NET GAIN
POST DEVELOPMENT**


Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Grison,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com


AECOM

Drawing Number FIGURE 2.2	Rev 0
-------------------------------------	-----------------

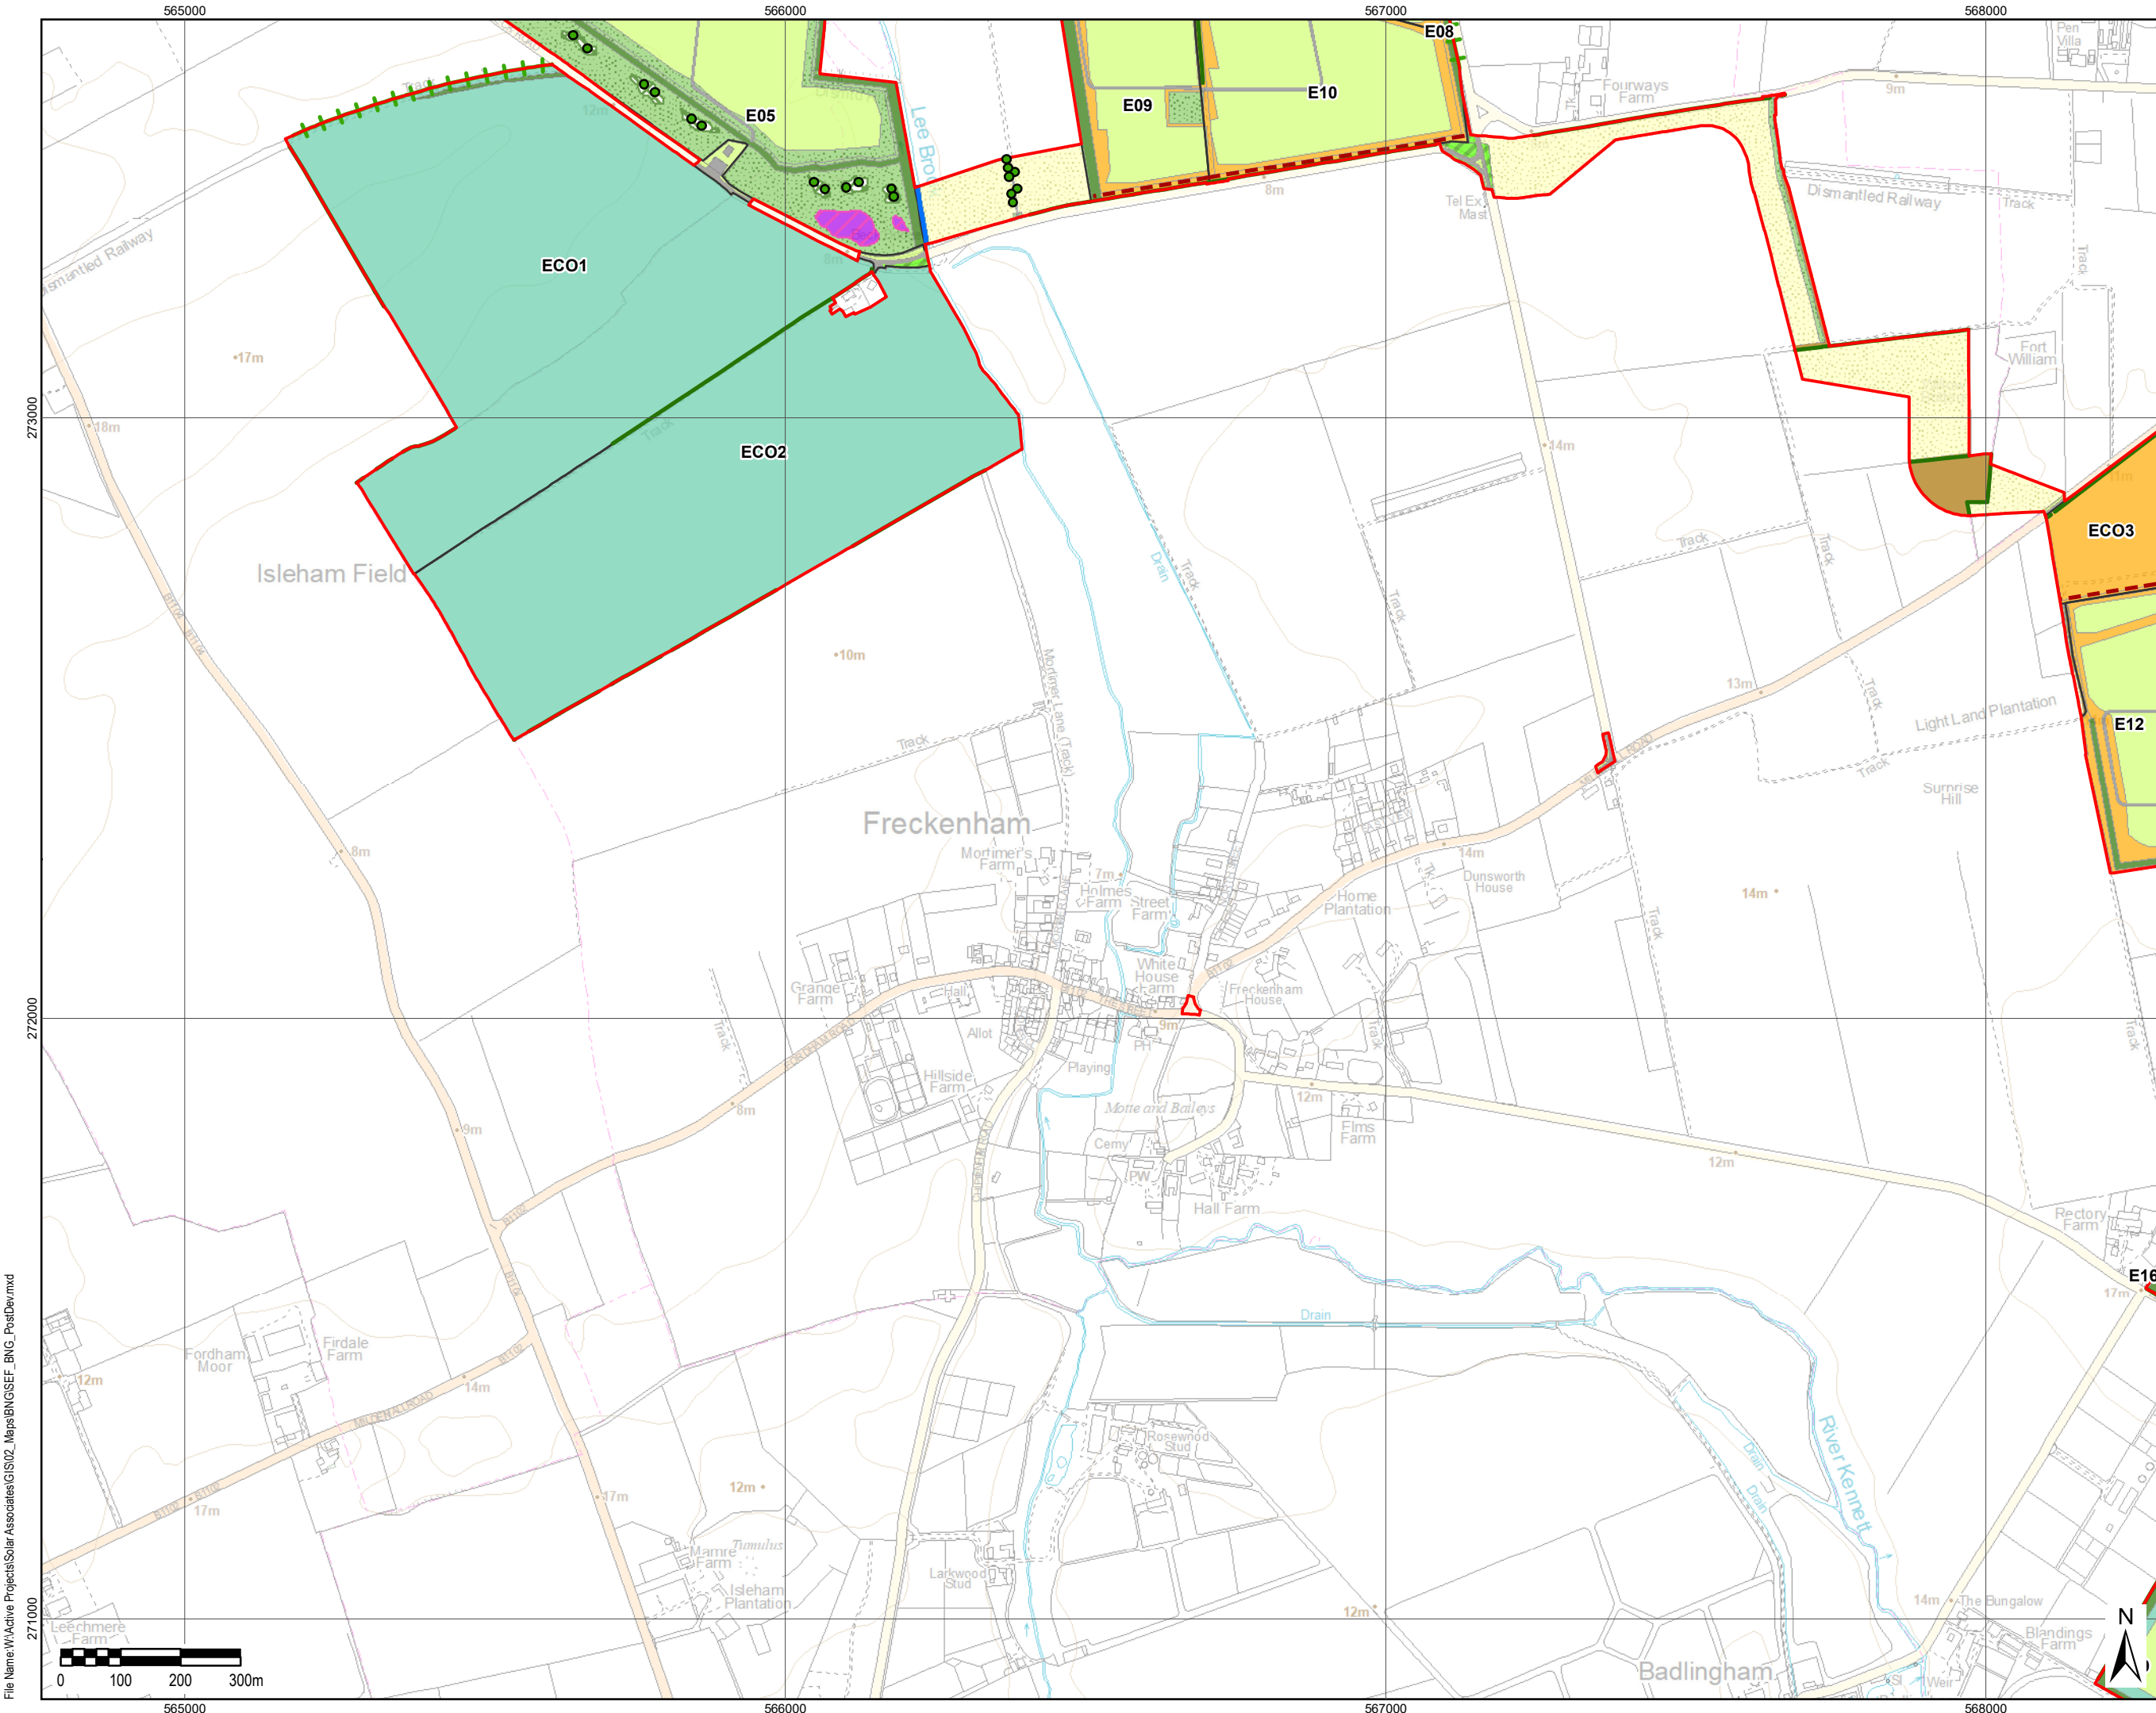

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

- LEGEND**
- Order Limits
 - Field Reference Boundary
 - UK Habitat Description**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Mixed scrub
 - Lowland calcareous grassland
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Purple moor grass and rush pastures
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Native Species Rich Hedgerow
 - Native hedgerow
 - Native hedgerow with trees
 - Other rivers and streams
 - Urban tree



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD



Drawing Title
**BIODIVERSITY NET GAIN
POST DEVELOPMENT**

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	


THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com



Drawing Number
FIGURE 2.3

Rev
0

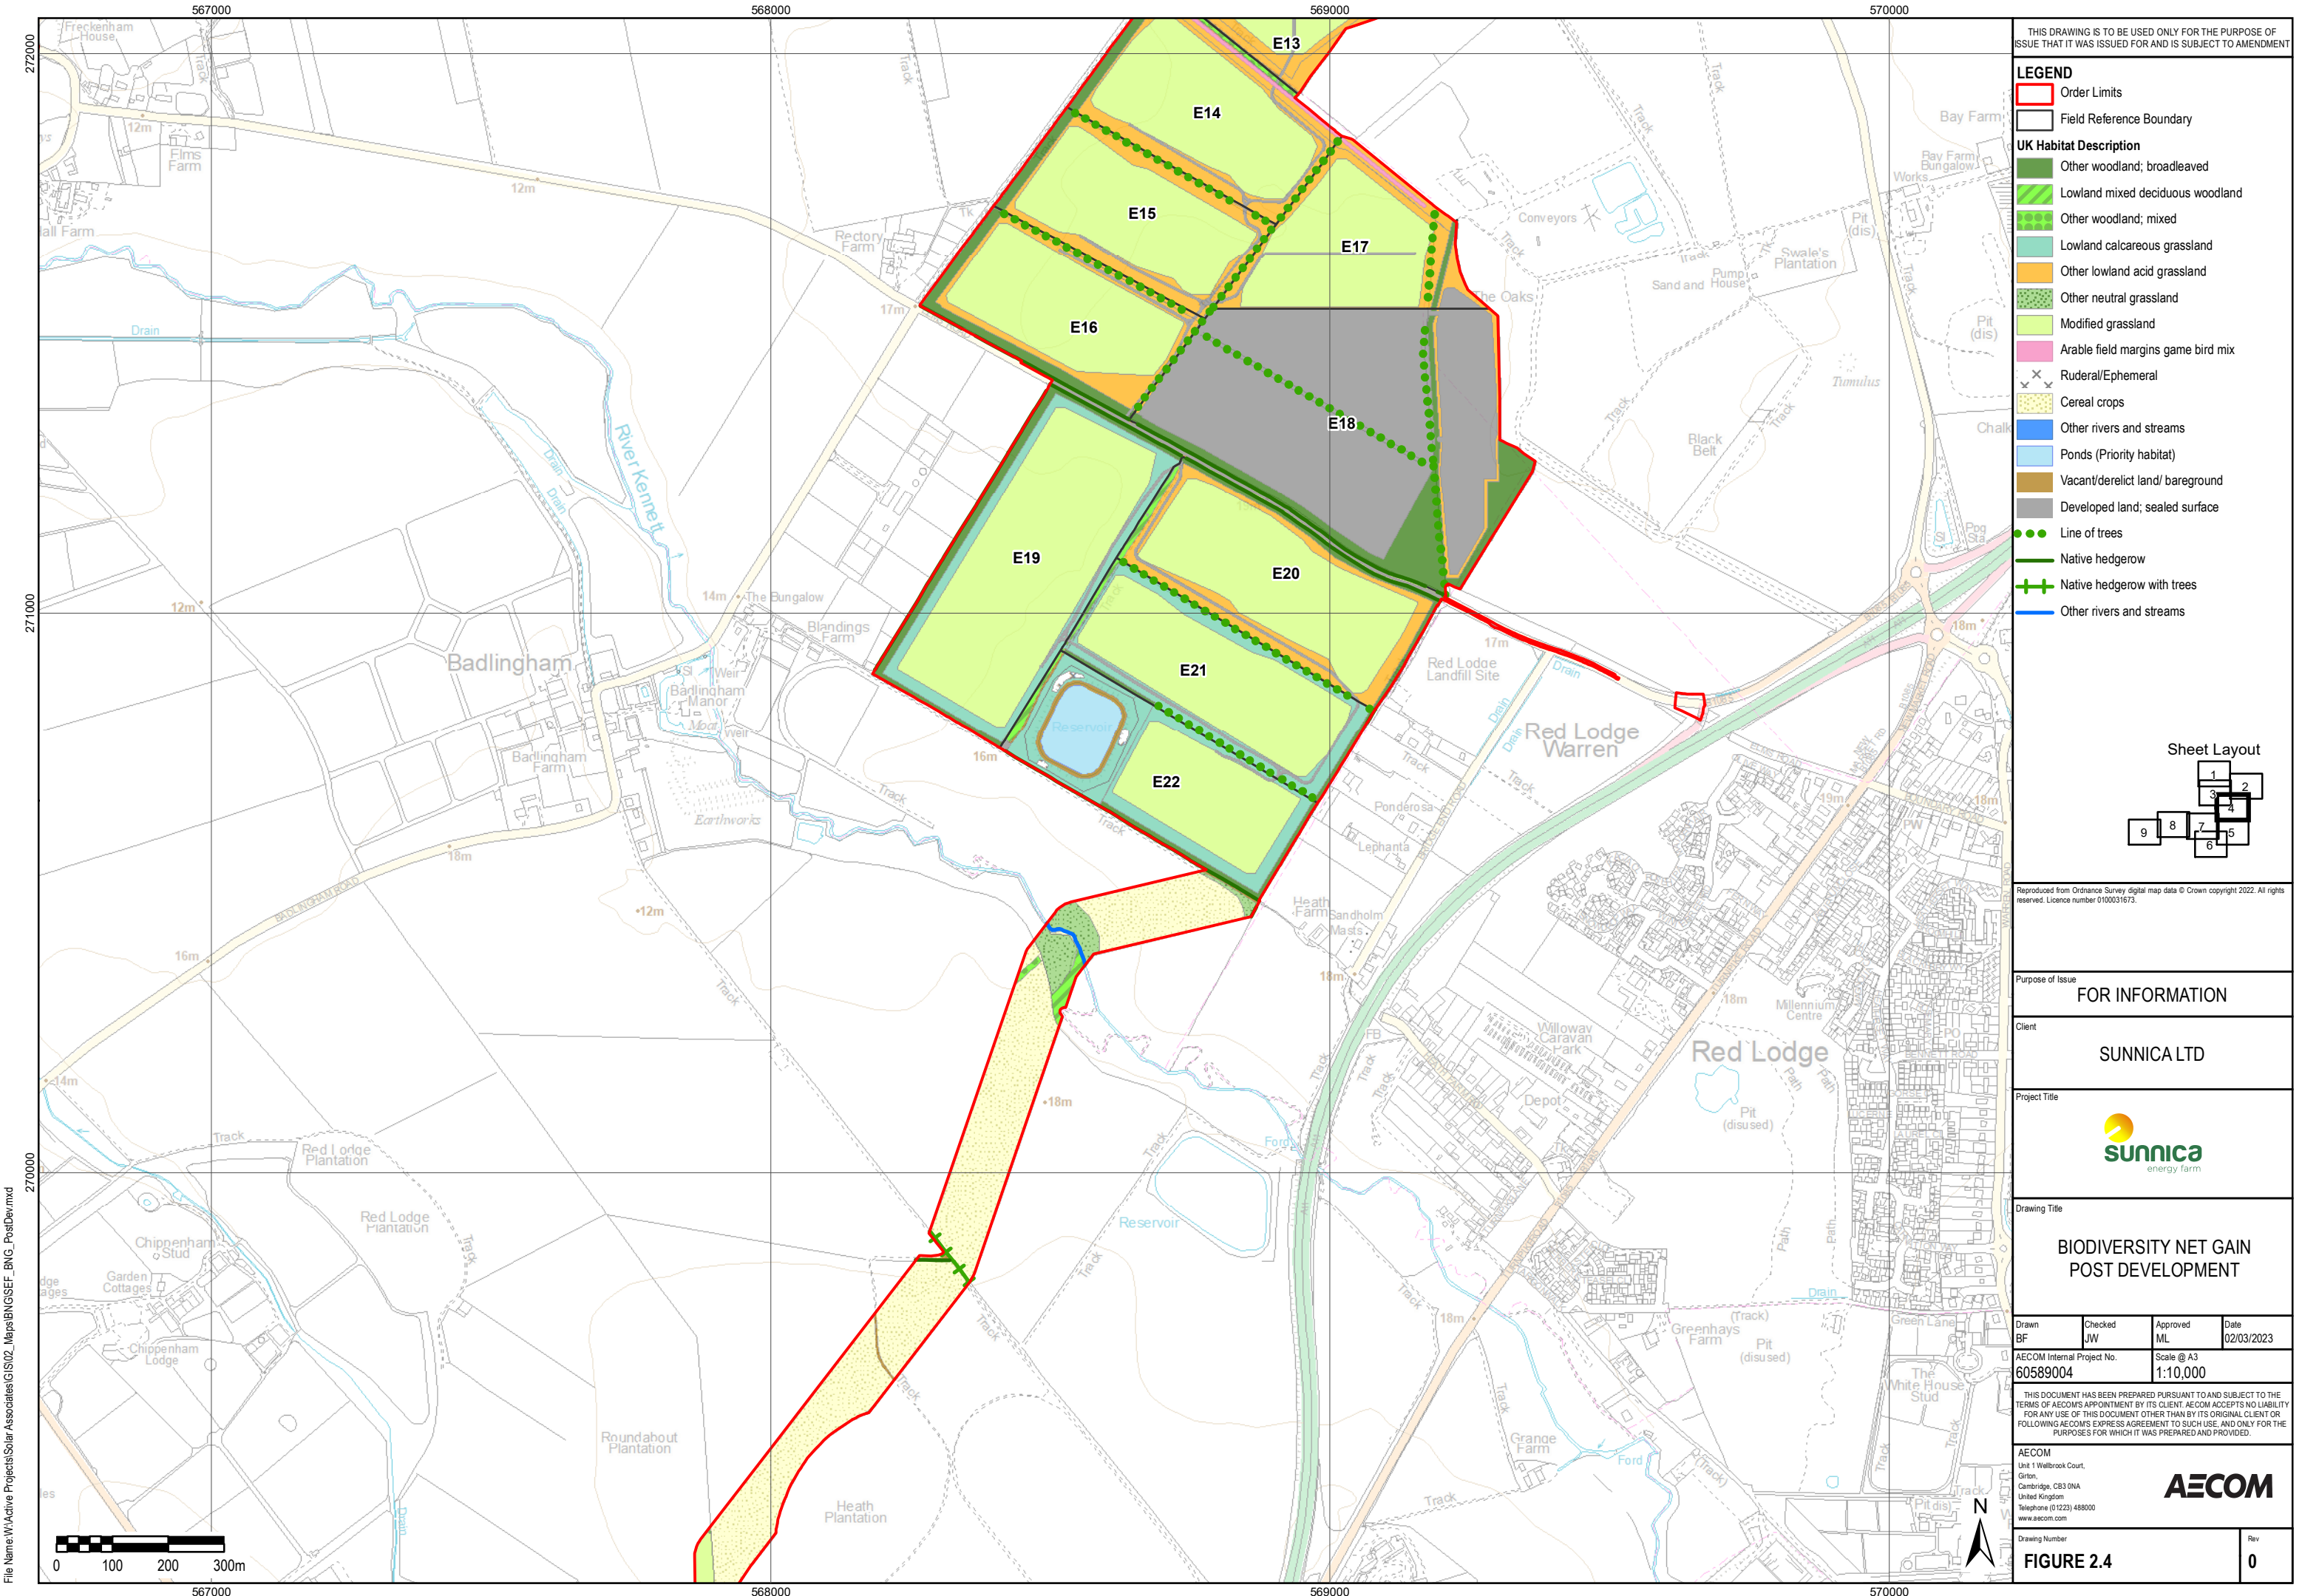


THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description
 - Other woodland; broadleaved
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Lowland calcareous grassland
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Arable field margins game bird mix
 - Ruderal/Ephemeral
 - Cereal crops
 - Other rivers and streams
 - Ponds (Priority habitat)
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Line of trees
 - Native hedgerow
 - Native hedgerow with trees
 - Other rivers and streams

Sheet Layout



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title


Drawing Title
BIODIVERSITY NET GAIN
POST DEVELOPMENT


Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.


AECOM
Unit 1 Wellbrook Court,
Oilton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com



Drawing Number FIGURE 2.4	Rev 0
------------------------------	----------

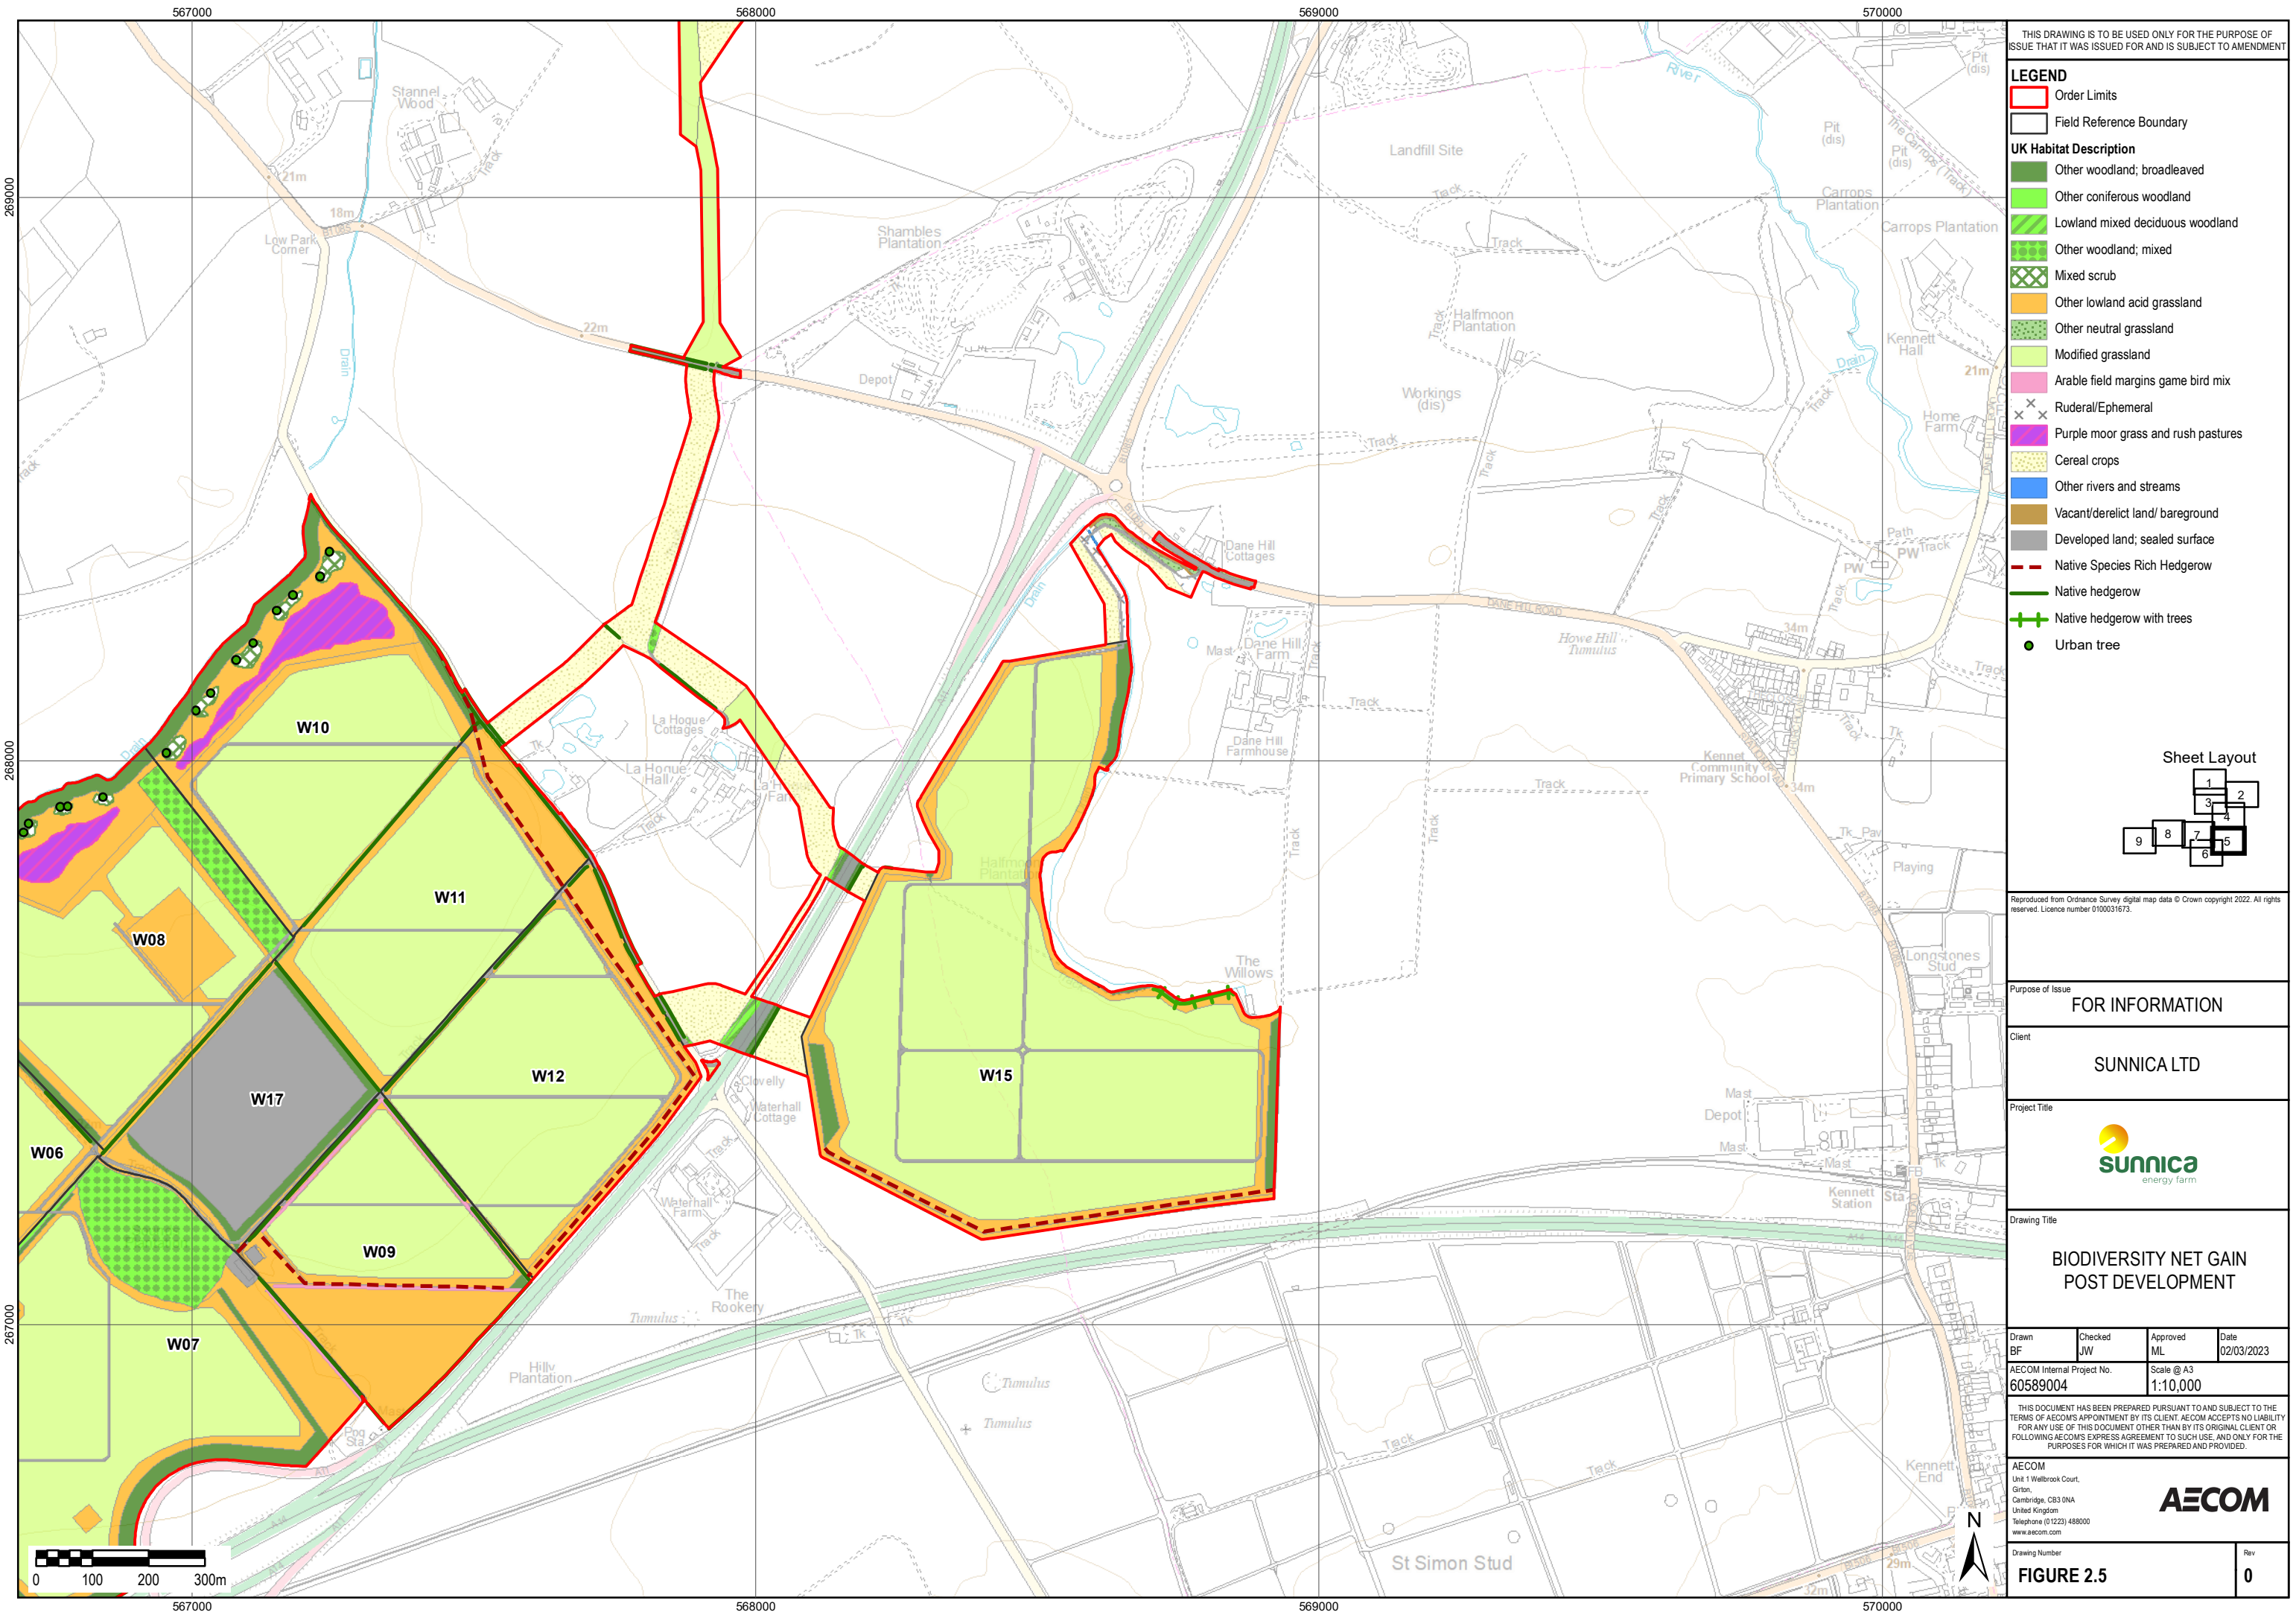

File Name: W:\Active Projects\Solar Associates\GIS\02_Maps\BINGSEF_BNG_PostDev.mxd

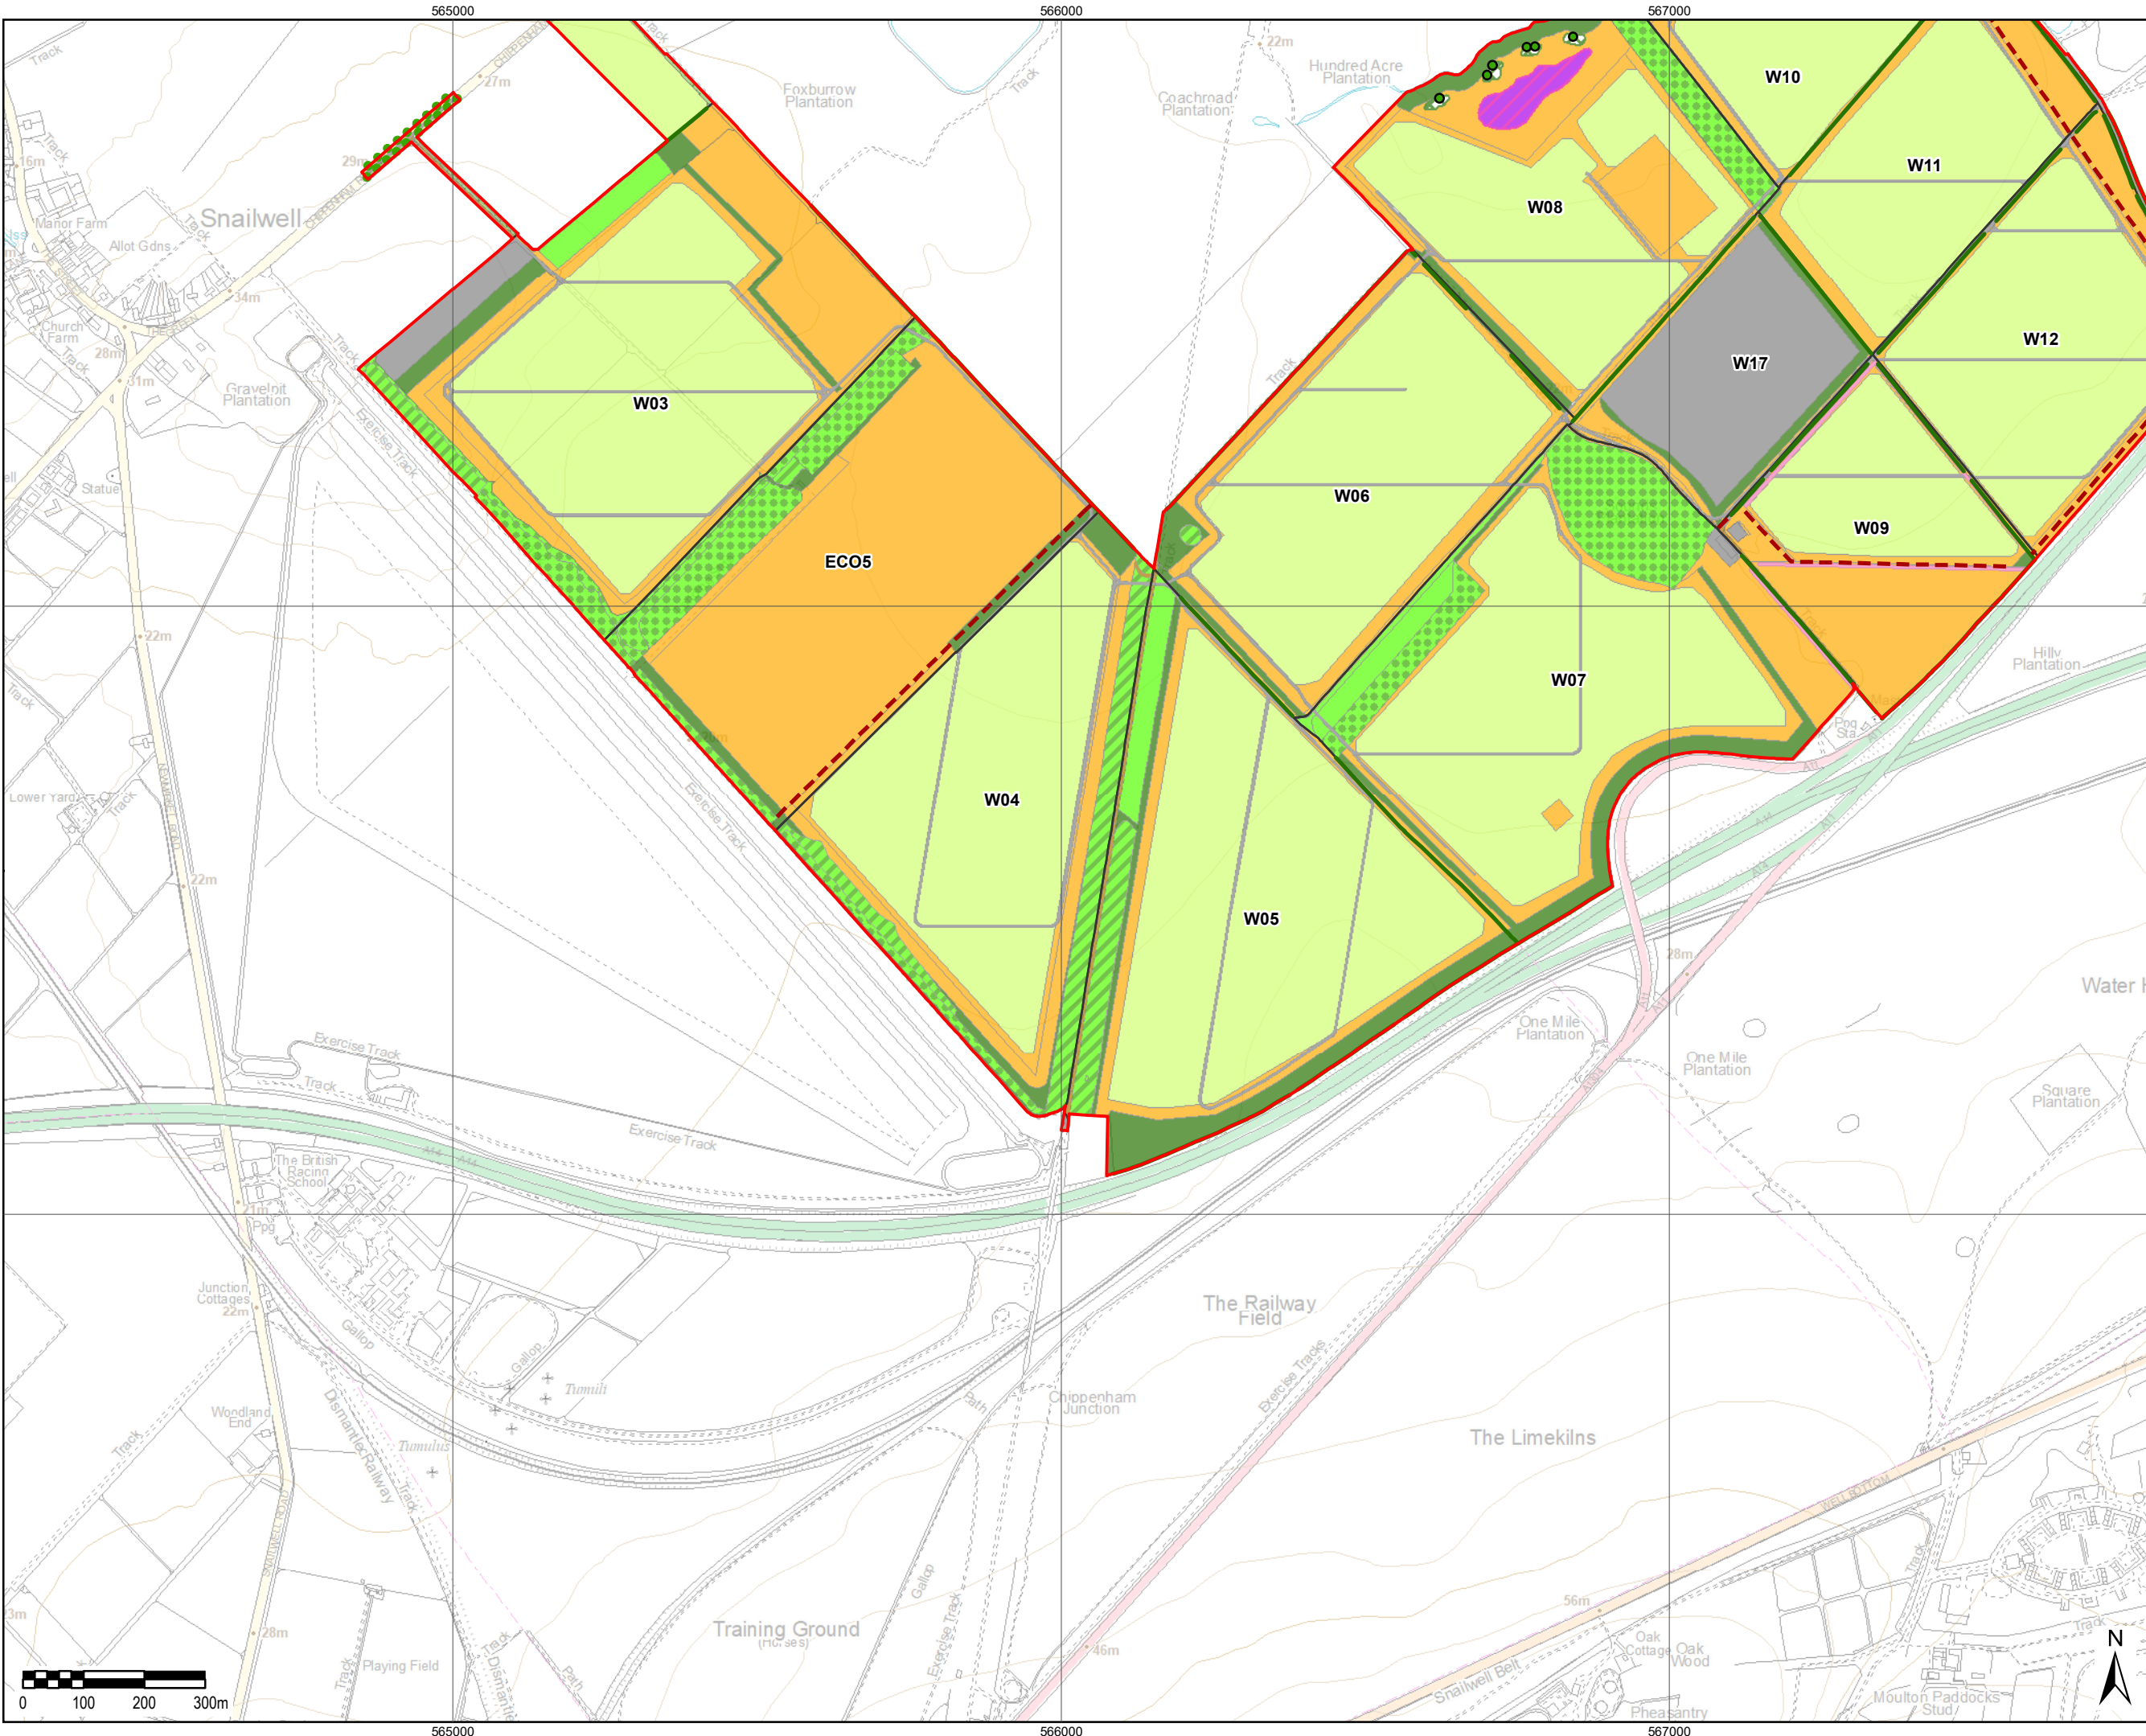


THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Mixed scrub
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Arable field margins game bird mix
 - Purple moor grass and rush pastures
 - Cereal crops
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Line of trees
 - Native Species Rich Hedgerow
 - Native hedgerow
 - Urban tree

Sheet Layout



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title


Drawing Title
BIODIVERSITY NET GAIN
POST DEVELOPMENT

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	


THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number
FIGURE 2.6

Rev
0

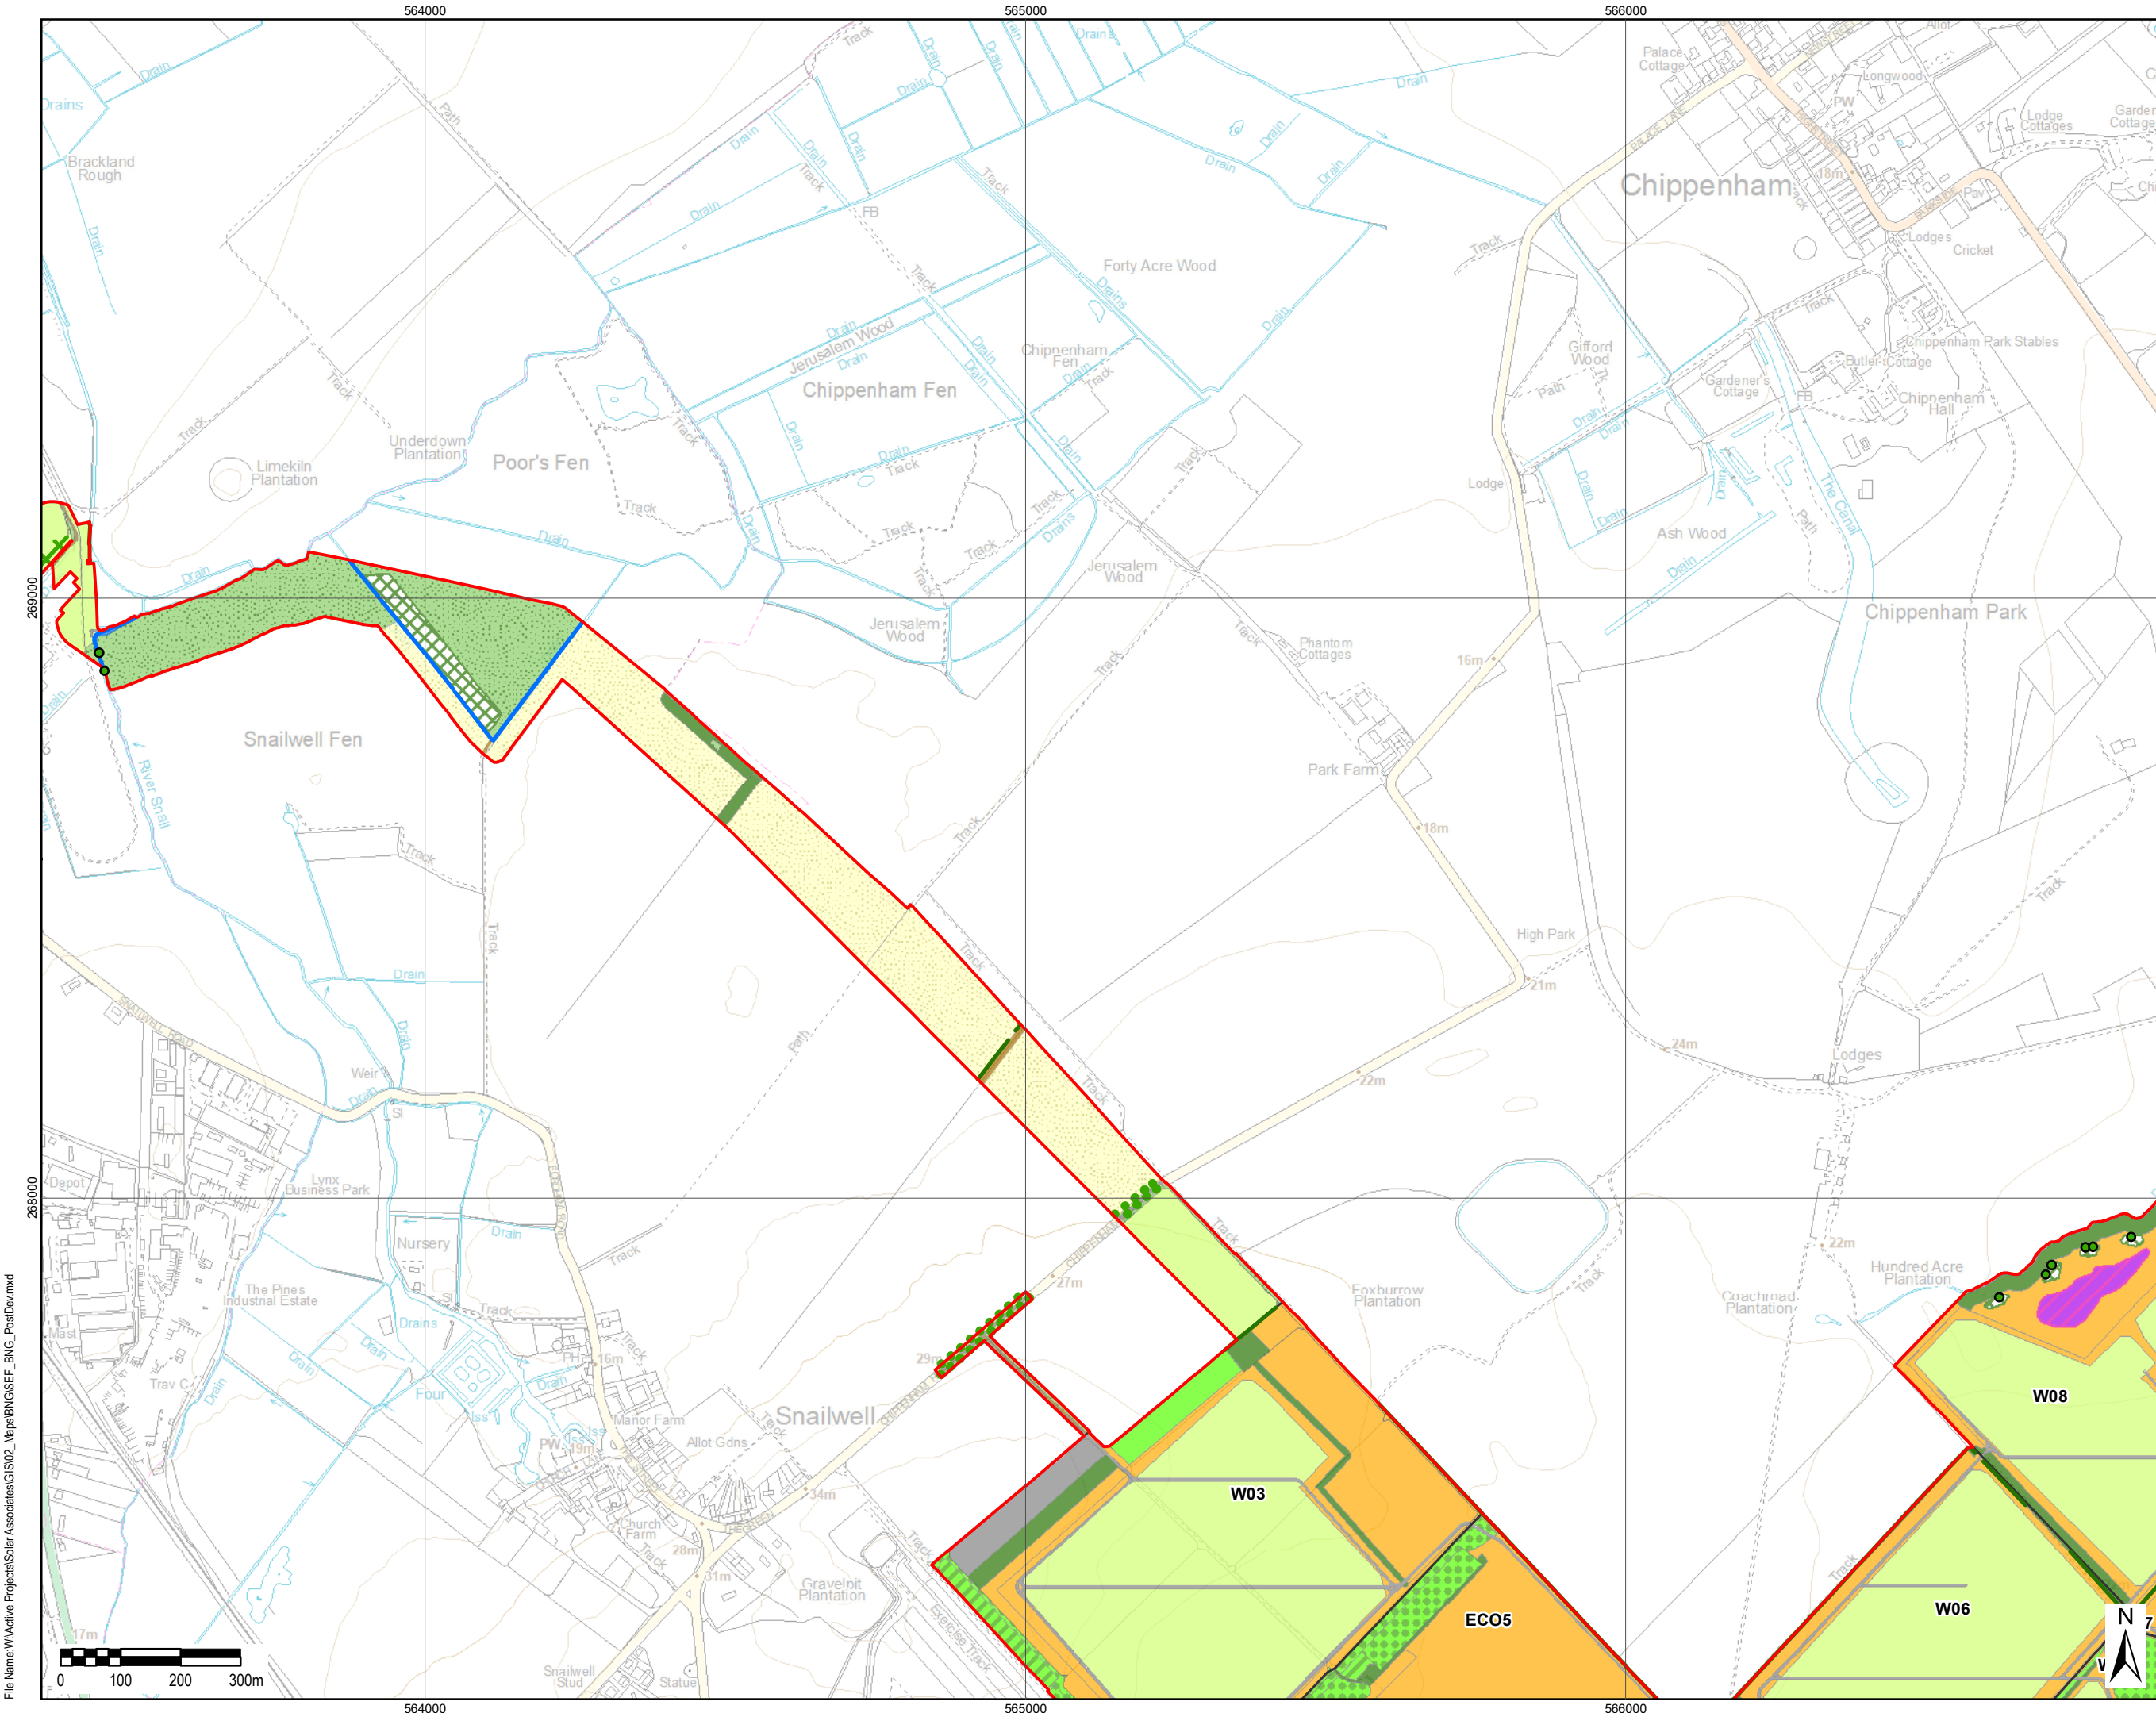

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- Field Reference Boundary
- UK Habitat Description**
 - Other woodland; broadleaved
 - Other coniferous woodland
 - Lowland mixed deciduous woodland
 - Other woodland; mixed
 - Mixed scrub
 - Other lowland acid grassland
 - Other neutral grassland
 - Modified grassland
 - Purple moor grass and rush pastures
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - Line of trees
 - Native Species Rich Hedgerow
 - Native hedgerow
 - Native hedgerow; with ditch
 - Native hedgerow with trees
 - Other rivers and streams
 - Urban tree

Sheet Layout

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title

Drawing Title
**BIODIVERSITY NET GAIN
POST DEVELOPMENT**

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	


THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number FIGURE 2.7	Rev 0
-------------------------------------	-----------------

File Name: \\Active Projects\\Solar Associates\\GIS02_Maps\\BNGSEF_BNG_PostDev.mxd

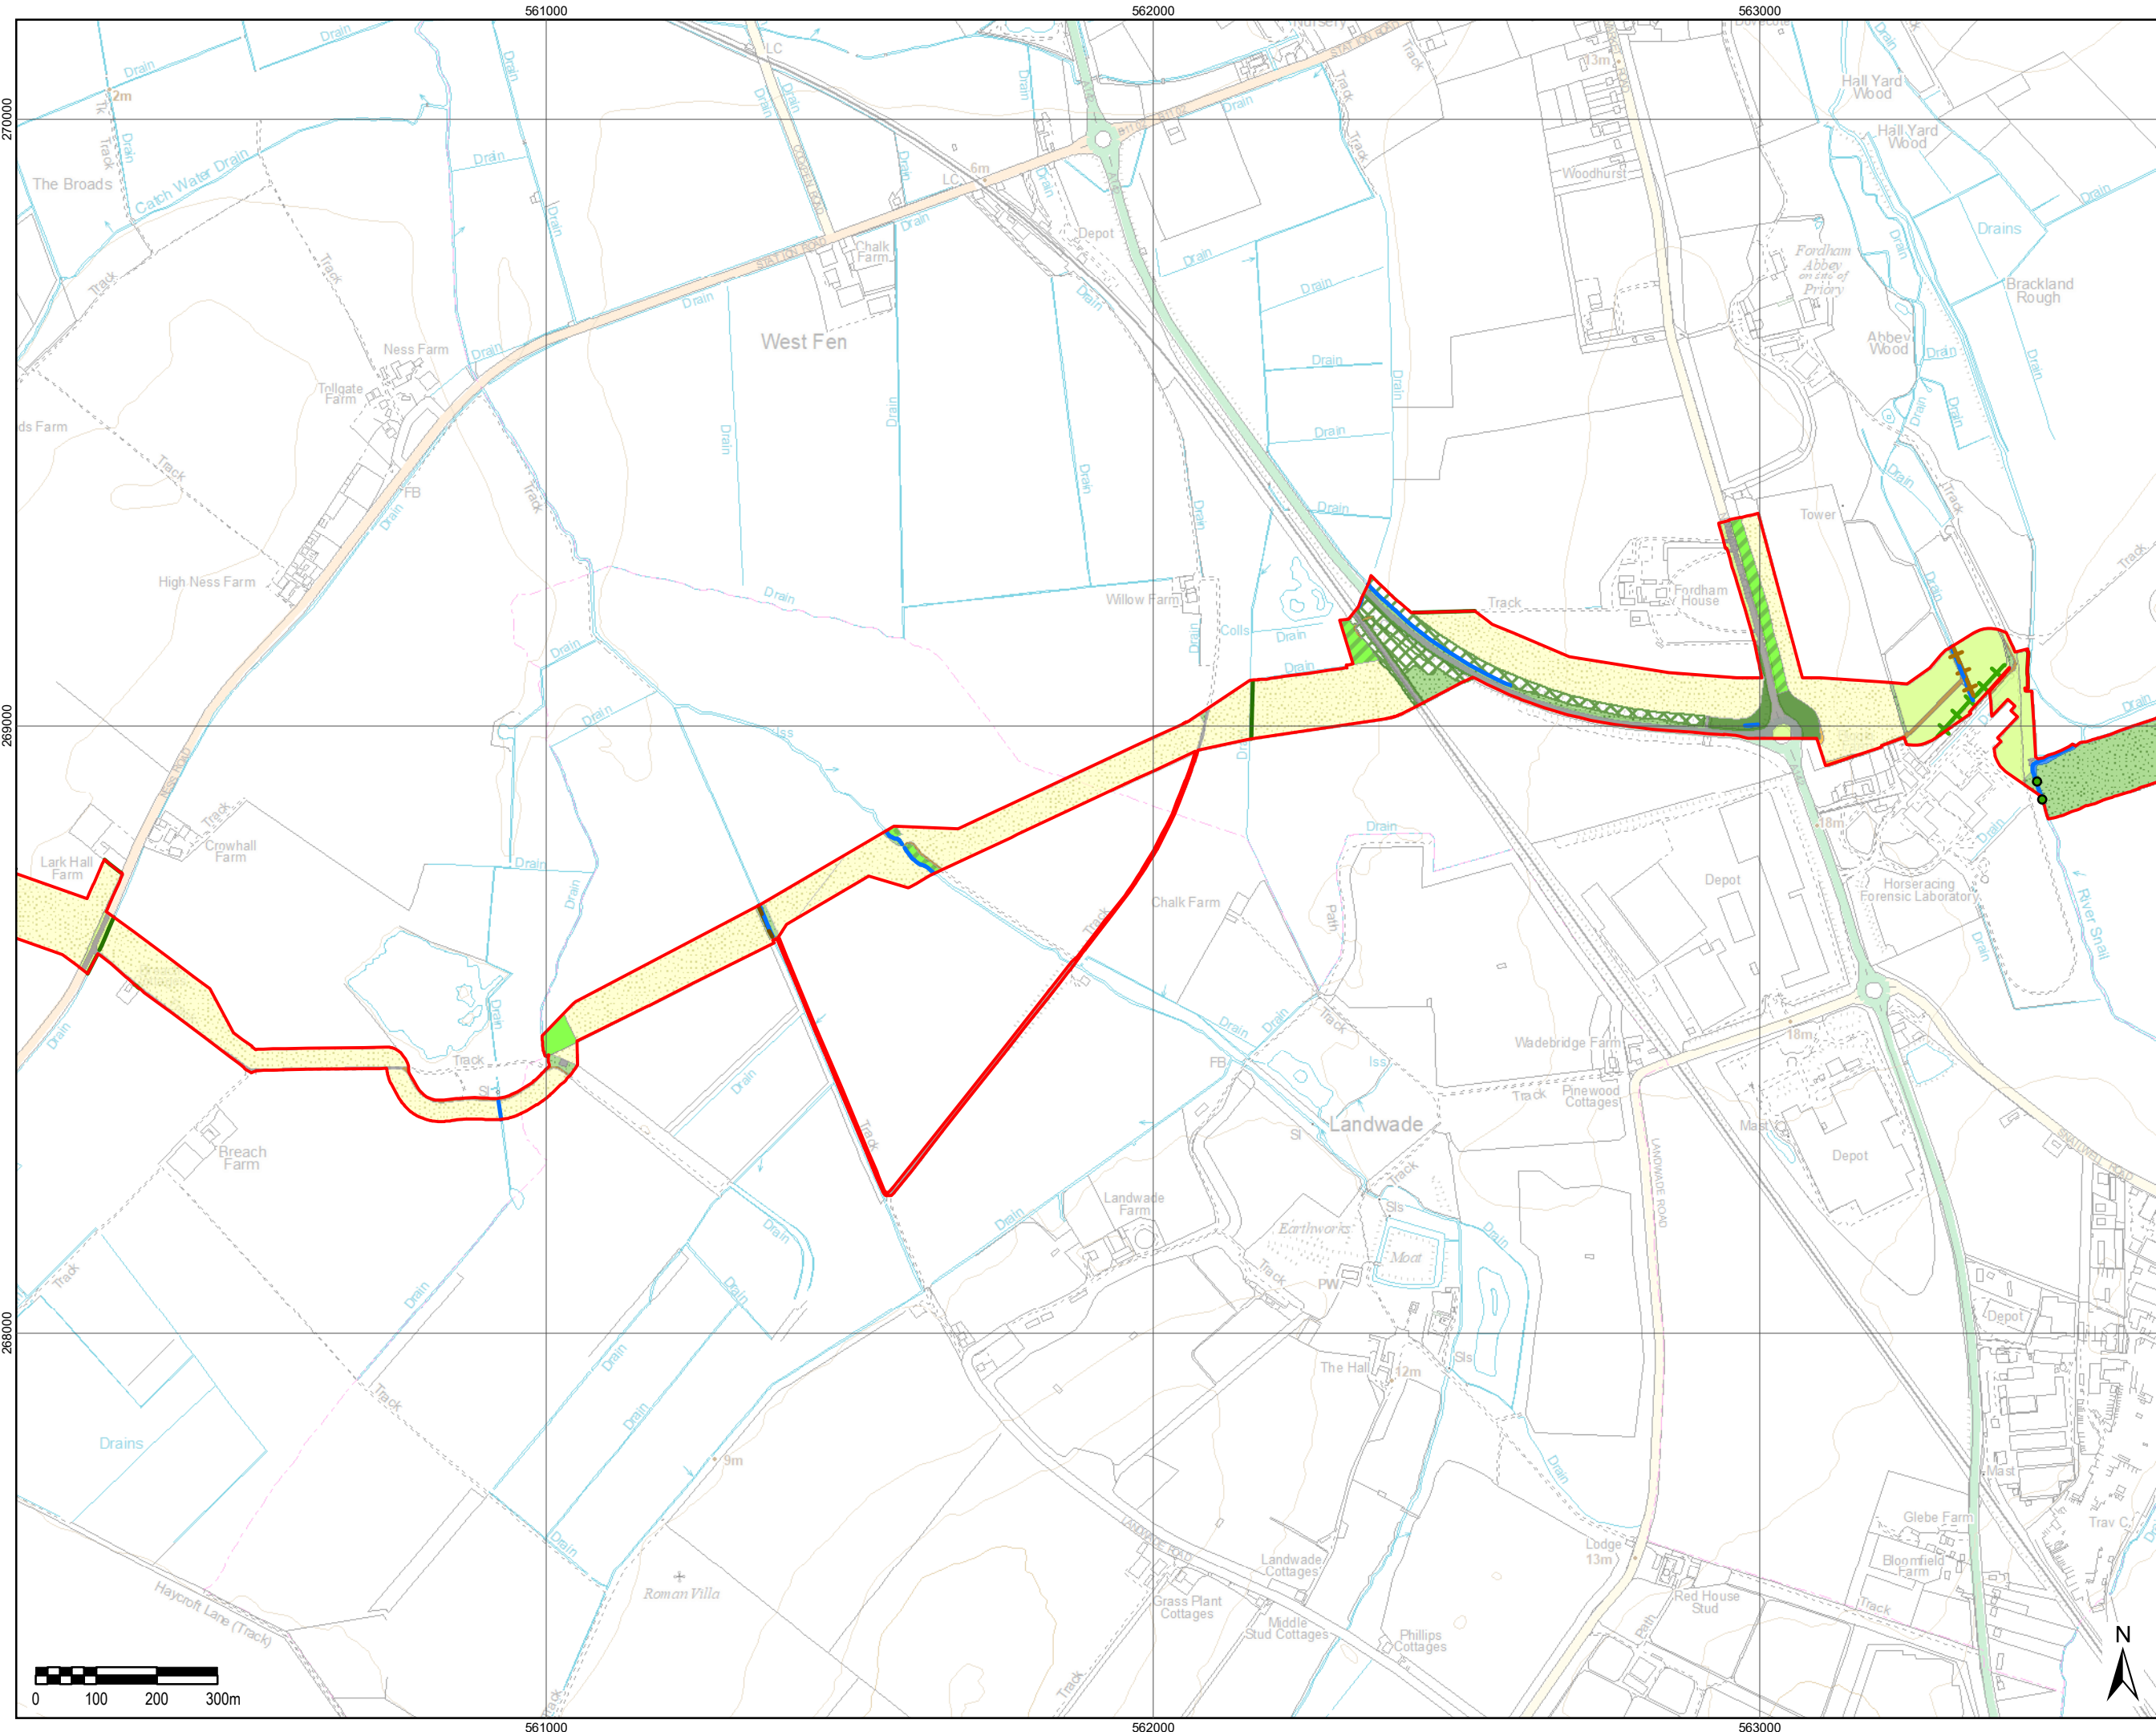

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT


LEGEND

Order Limits

UK Habitat Description

- Other woodland; broadleaved
- Other coniferous woodland
- Lowland mixed deciduous woodland
- Other woodland; mixed
- Mixed scrub
- Other lowland acid grassland
- Other neutral grassland
- Modified grassland
- Cereal crops
- Other rivers and streams
- Vacant/derelict land/ bareground
- Developed land; sealed surface
- Native hedgerow
- Native hedgerow; with ditch
- Native hedgerow with trees
- Native hedgerow with trees; with ditch
- Other rivers and streams
- Urban tree

Sheet Layout



Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD



Drawing Title
BIODIVERSITY NET GAIN
POST DEVELOPMENT

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	


THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number
FIGURE 2.8

Rev
0

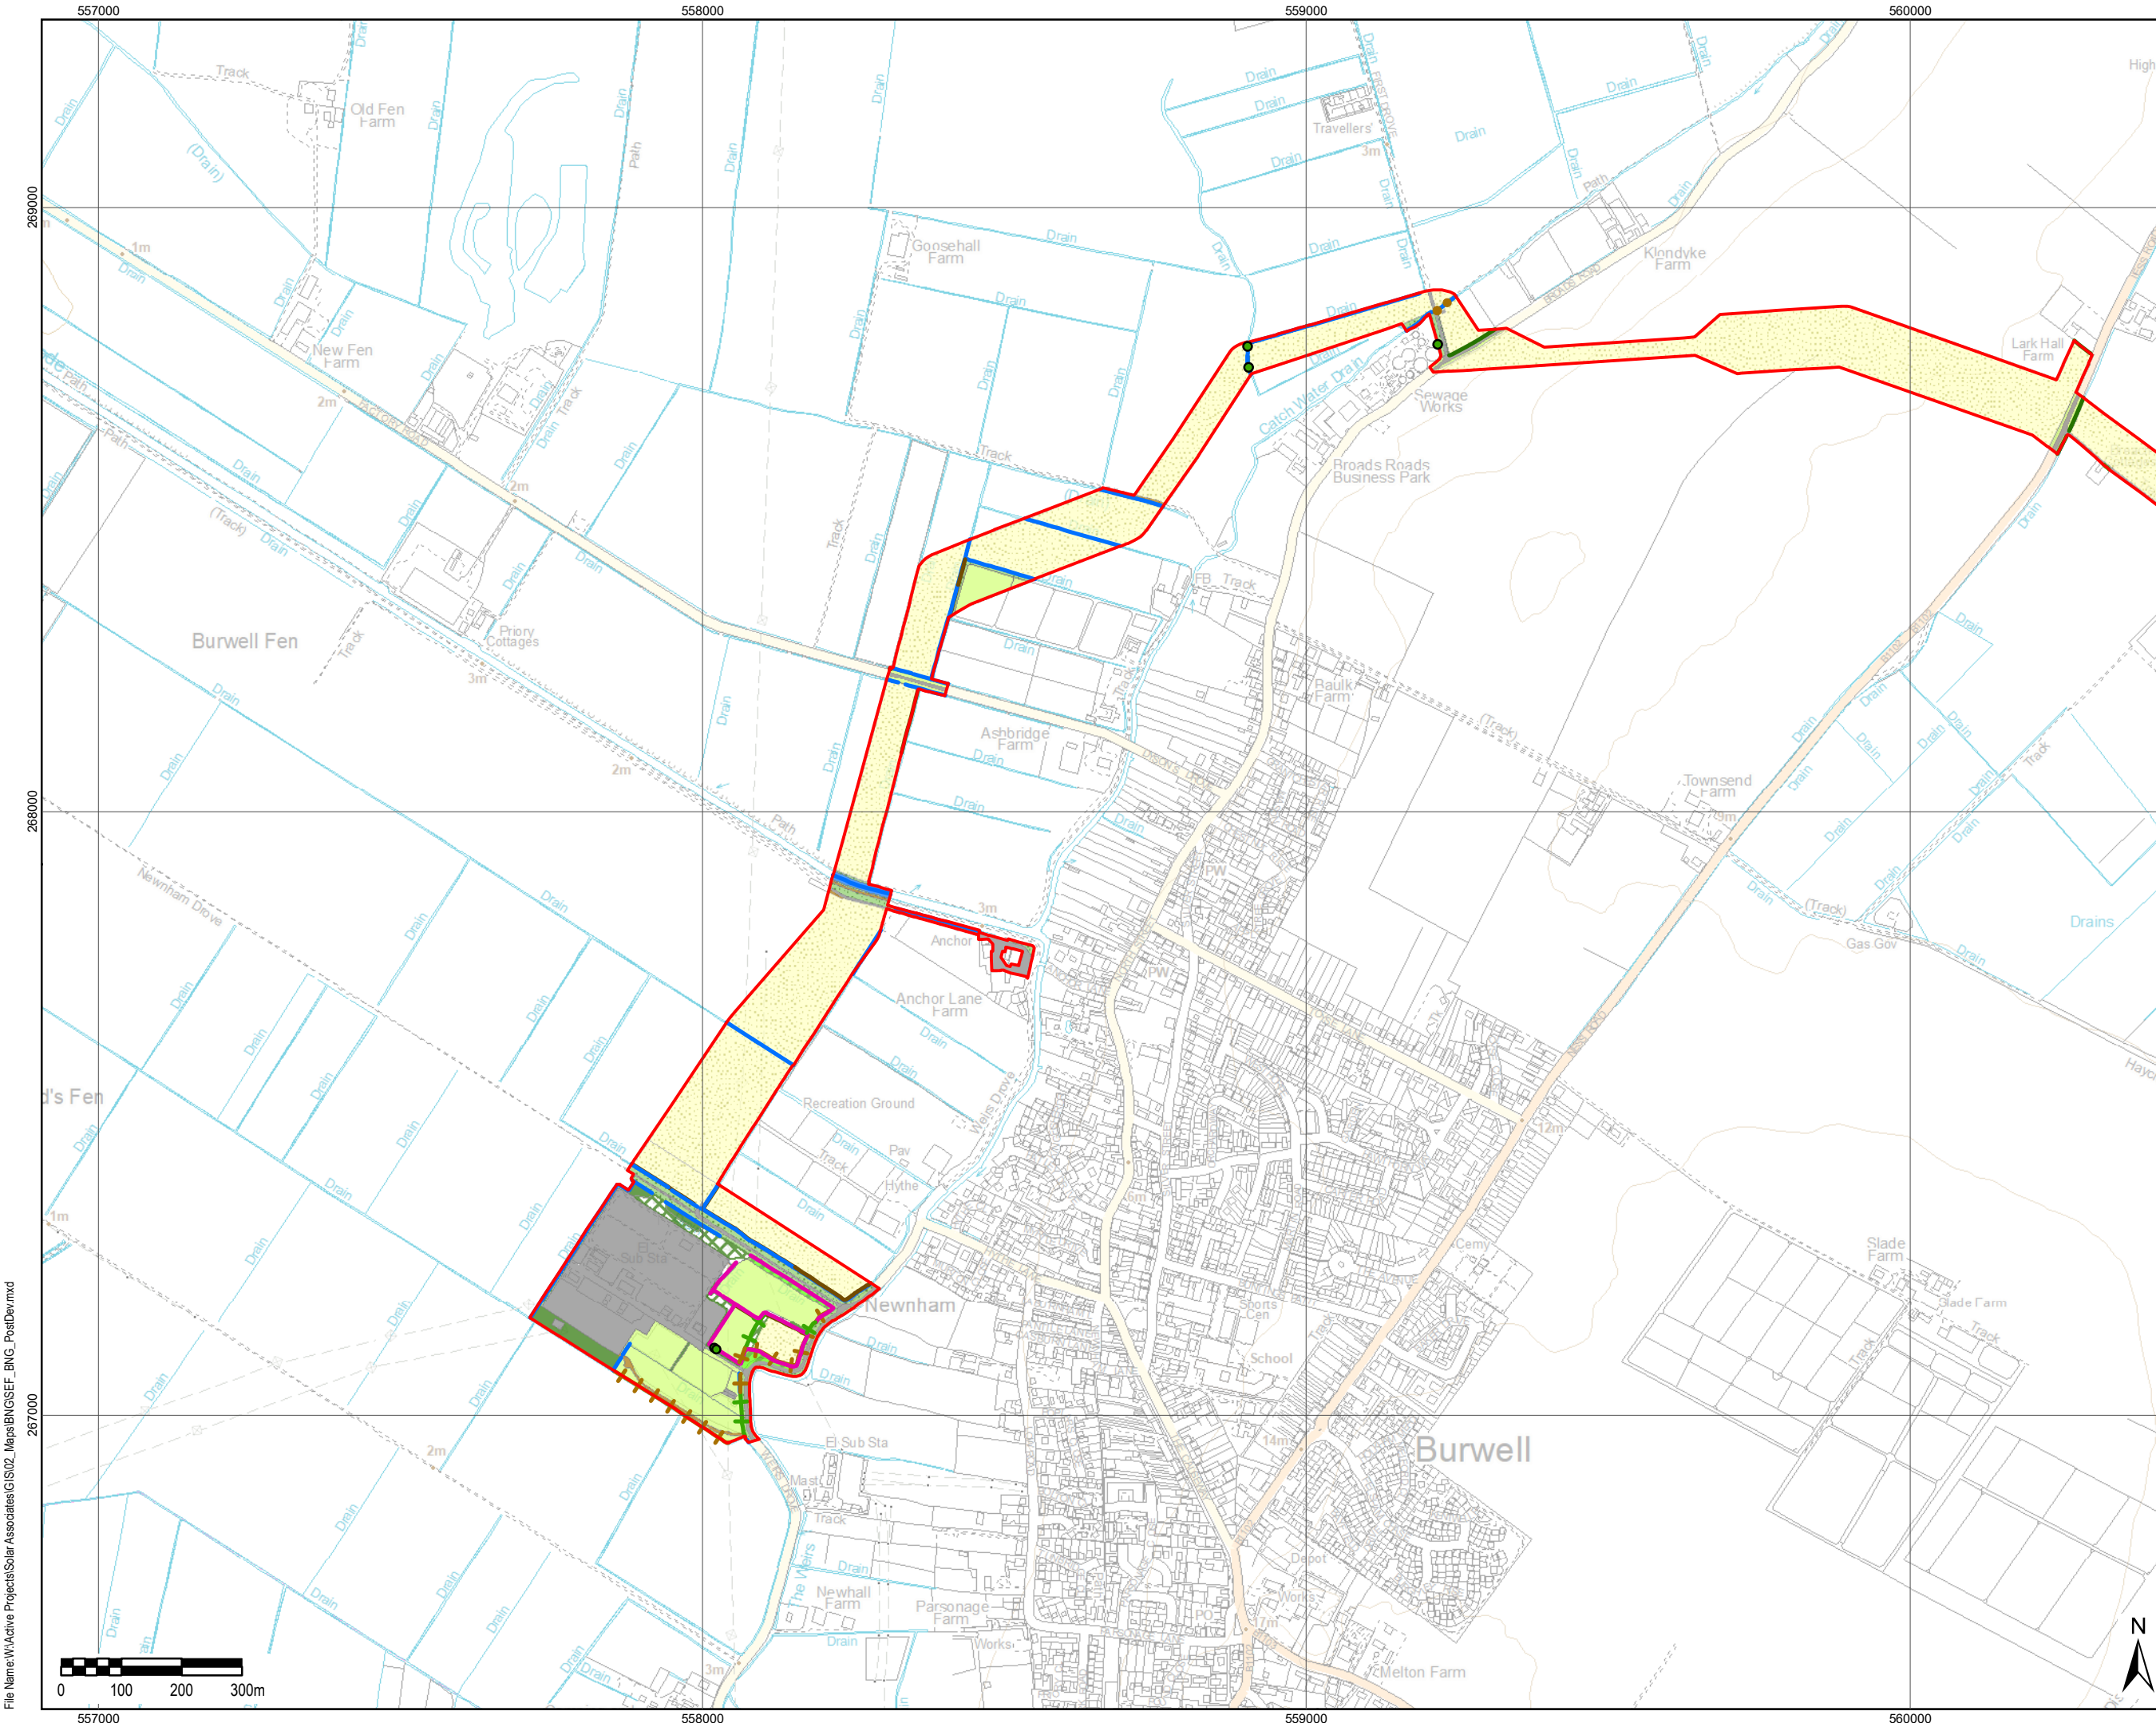

THIS DRAWING IS TO BE USED ONLY FOR THE PURPOSE OF ISSUE THAT IT WAS ISSUED FOR AND IS SUBJECT TO AMENDMENT

LEGEND

- Order Limits
- UK Habitat Description**
 - Other woodland; broadleaved
 - Lowland mixed deciduous woodland
 - Mixed scrub
 - Other neutral grassland
 - Modified grassland
 - Ruderal/Ephemeral
 - Cereal crops
 - Other rivers and streams
 - Vacant/derelict land/ bareground
 - Developed land; sealed surface
 - <all other values>
 - Line of trees; with ditch
 - Native hedgerow
 - Native hedgerow; with ditch
 - Native hedgerow with trees
 - Native hedgerow with trees; with ditch
 - Other rivers and streams
 - Urban tree

Sheet Layout

1	2
3	4
5	6
7	8
9	

Reproduced from Ordnance Survey digital map data © Crown copyright 2022. All rights reserved. Licence number 0100031673.

Purpose of Issue
FOR INFORMATION

Client
SUNNICA LTD

Project Title


Drawing Title
**BIODIVERSITY NET GAIN
POST DEVELOPMENT**

Drawn BF	Checked JW	Approved ML	Date 02/03/2023
AECOM Internal Project No. 60589004		Scale @ A3 1:10,000	

THIS DOCUMENT HAS BEEN PREPARED PURSUANT TO AND SUBJECT TO THE TERMS OF AECOM'S APPOINTMENT BY ITS CLIENT. AECOM ACCEPTS NO LIABILITY FOR ANY USE OF THIS DOCUMENT OTHER THAN BY ITS ORIGINAL CLIENT OR FOLLOWING AECOM'S EXPRESS AGREEMENT TO SUCH USE, AND ONLY FOR THE PURPOSES FOR WHICH IT WAS PREPARED AND PROVIDED.

AECOM
Unit 1 Wellbrook Court,
Girton,
Cambridge, CB3 0NA
United Kingdom
Telephone (01223) 488000
www.aecom.com

AECOM

Drawing Number
FIGURE 2.9

Rev
0

File Name: \\Active Projects\\Solar Associates\\GIS\\02_Maps\\BNGSEF_BNG_PostDev.mxd

Appendix D Natural England's Biodiversity Metric 3.1 Calculations

Metric 1 Within ECNRN

Headline Results

SUNNICA WITHIN ECNRN

Headline Results

Return to
results menu

On-site baseline

<i>Habitat units</i>	1238.15
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

On-site post-intervention

(Including habitat retention, creation & enhancement)

<i>Habitat units</i>	1883.48
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

On-site net % change

(Including habitat retention, creation & enhancement)

<i>Habitat units</i>	52.12%
<i>Hedgerow units</i>	0.00%
<i>River units</i>	0.00%

Off-site baseline

<i>Habitat units</i>	0.00
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

Off-site post-intervention

(Including habitat retention, creation & enhancement)

<i>Habitat units</i>	0.00
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

Total net unit change

(including all on-site & off-site habitat retention, creation & enhancement)

<i>Habitat units</i>	645.34
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

Total on-site net % change plus off-site surplus

(including all on-site & off-site habitat retention, creation & enhancement)

<i>Habitat units</i>	52.12%
<i>Hedgerow units</i>	0.00%
<i>River units</i>	0.00%

Trading rules Satisfied?

Yes ✓

Detailed Results

SUNNICA WITHIN ECNRN

Detailed Results

Return to results menu

Summary Figures

Net project biodiversity units
(including all on-site & off-site habitat retention/creation)

Habitat units

Hedgerow units

River units

645.34

0.00

0.00

Total project biodiversity % change
(including all On-site & Off-site Habitat Creation + Retained Habitats)

Habitat units

Hedgerow units

River units

52.12%

0.00%

0.00%

Combined habitat retention and enhancement

Habitats

Hedgerows

Rivers

Total on-site and off-site baseline area / length

Total on-site and off-site baseline units

438.26

1238.15

0.00

0.00

0.00

0.00

Total on-site and off-site baseline area / length retained

Total on-site and off-site baseline units retained

85.43

377.72

0.00

0.00

0.00

0.00

Area / length proposed for enhancement

Baseline units proposed for enhancement

7.60

104.81

0.00

0.00

0.00

0.00

Total on-site and off-site baseline area / length lost

Total on-site and off-site baseline units lost

343.23

755.61

0.00

0.00

0.00

0.00

Area habitats

On site change by broad habitat type

Baseline

Post development on site

Onsite Change

Habitat group

Existing area

Existing value

Proposed area

Proposed value

Area change

Onsite Unit change

Cropland

326.95

653.91

41.25

84.22

-285.71

-569.69

Grassland

72.69

273.86

311.10

1386.76

238.41

1112.90

Heathland and shrub

1.38

12.66

2.00

16.30

0.63

3.65

Lakes

0.00

0.00

0.00

0.00

0.00

0.00

Sparsely vegetated land

2.04

8.15

0.43

1.74

-1.60

-6.41

Urban

4.70

11.35

32.39

4.81

27.69

-6.54

Wetland

0.00

0.00

3.02

9.00

3.02

9.00

Woodland and forest

28.50

278.23

46.08

380.66

17.58

102.43

Intertidal sediment

0.00

0.00

0.00

0.00

0.00

0.00

Coastal saltmarsh

0.00

0.00

0.00

0.00

0.00

0.00

Rocky shore

0.00

0.00

0.00

0.00

0.00

0.00

Coastal lagoons

0.00

0.00

0.00

0.00

0.00

0.00

Intertidal Hard Structures

0.00

0.00

0.00

0.00

0.00

0.00

Off site change by broad habitat type

Baseline

Post development Off-site

Off-site Change

Habitat group

Existing area

Off-site Existing value

Off-site proposed area

Off site Proposed value

Off-site area change

Off-site unit change

Cropland

0.00

0.00

0.00

0.00

0.00

0.00

Grassland

0.00

0.00

0.00

0.00

0.00

0.00

Heathland and shrub

0.00

0.00

0.00

0.00

0.00

0.00

Lakes

0.00

0.00

0.00

0.00

0.00

0.00

Sparsely vegetated land

0.00

0.00

0.00

0.00

0.00

0.00

Urban

0.00

0.00

0.00

0.00

0.00

0.00

Wetland

0.00

0.00

0.00

0.00

0.00

0.00

Woodland and forest

0.00

0.00

0.00

0.00

0.00

0.00

Intertidal sediment

0.00

0.00

0.00

0.00

0.00

0.00

Coastal saltmarsh

0.00

0.00

0.00

0.00

0.00

0.00

Rocky shore

0.00

0.00

0.00

0.00

0.00

0.00

Coastal lagoons

0.00

0.00

0.00

0.00

0.00

0.00

Intertidal Hard Structures

0.00

0.00

0.00

0.00

0.00

0.00

Combined on site and off site change by broad habitat type

Baseline

On-site and Off-site post development

Combined change

Habitat group

Existing area

Existing value

Combined proposed area

Combined proposed value

Proposed area

Proposed value

Cropland

326.95

653.91

41.25

84.22

-285.71

-569.69

Grassland

72.69

273.86

311.10

1386.76

238.41

1112.90

Heathland and shrub

1.38

12.66

2.00

16.30

0.63

3.65

Lakes

0.00

0.00

0.00

0.00

0.00

0.00

Sparsely vegetated land

2.04

8.15

0.43

1.74

-1.60

-6.41

Urban

4.70

11.35

32.39

4.81

27.69

-6.54

Wetland

0.00

0.00

3.02

9.00

3.02

9.00

Woodland and forest

28.50

278.23

46.08

380.66

17.58

102.43

Intertidal sediment

0.00

0.00

0.00

0.00

0.00

0.00

Coastal saltmarsh

0.00

0.00

0.00

0.00

0.00

0.00

Rocky shore

0.00

0.00

0.00

0.00

0.00

0.00

Coastal lagoons

0.00

0.00

0.00

0.00

0.00

0.00

Intertidal Hard Structures

0.00

0.00

0.00

0.00

0.00

0.00

Combined area lost by distinctiveness band

Category

Area lost (hectares)

Area lost (%)

V.High

0

High

0.01343767

0

Medium

18.81976203

5

Low

327.2721637

95

V.Low

0.125658844

0

% Area lost by distinctiveness category

V.Low

Low

Medium

High

V.High

0%

95%

5%

On-site and off-site habitat retention by category area (hectares)

85.43

7.60

343.23

On-site and off-site habitat retention category biodiversity units

377.72

104.81

755.61

Unit change by habitat group

Existing value

Proposed value

Off site Proposed value

Cropland

653.91

84.22

Grassland

273.86

1386.76

Heathland and shrub

12.66

16.30

Lakes

0.00

0.00

Sparsely vegetated land

8.15

1.74

Urban

11.35

4.81

Wetland

0.00

0.00

Woodland and forest

278.23

380.66

Intertidal sediment

0.00

0.00

Coastal saltmarsh

0.00

0.00

Rocky shore

0.00

0.00

Coastal lagoons

0.00

0.00

Intertidal Hard Structures

0.00

0.00

On site area change by habitat group

Existing area

Proposed area

Off-site proposed area

Cropland

326.95

41.25

Grassland

72.69

311.10

Heathland and shrub

1.38

2.00

Lakes

0.00

0.00

Sparsely vegetated land

2.04

0.43

Urban

4.70

32.39

Wetland

0.00

3.02

Woodland and forest

28.50

46.08

Intertidal sediment

0.00

0.00

Coastal saltmarsh

0.00

0.00

Rocky shore

0.00

0.00

Coastal lagoons

0.00

0.00

Intertidal Hard Structures

0.00

0.00

Combined Biodiversity Unit change

Existing value

Proposed value

Onsite Unit change

Off-site unit change

Off site Proposed value

Off-site Existing value

Cropland

653.91

84.22

-285.71

Grassland

273.86

1386.76

238.41

Heathland and shrub

12.66

16.30

0.63

Lakes

0.00

0.00

0.00

Sparsely vegetated land

8.15

1.74

-1.60

Urban

11.35

4.81

27.69

Wetland

0.00

0.00

0.00

Woodland and forest

278.23

380.66

17.58

Intertidal sediment

0.00

0.00

0.00

Coastal saltmarsh

0.00

0.00

0.00

Rocky shore

0.00

0.00

0.00

Coastal lagoons

0.00

0.00

0.00

Intertidal Hard Structures

0.00

0.00

0.00

Combined habiat area change

Existing area

Proposed area

Area change

Off-site area change

Off-site proposed area

Existing area

Cropland

326.95

41.25

-285.71

Grassland

72.69

311.10

238.41

Heathland and shrub

1.38

2.00

0.63

Lakes

0.00

0.00

0.00

Sparsely vegetated land

2.04

0.43

-1.60

Urban

4.70

32.39

27.69

Wetland

0.00

3.02

0.00

Woodland and forest

28.50

46.08

17.58

Intertidal sediment

0.00

0.00

0.00

Coastal saltmarsh

0.00

0.00

0.00

Rocky shore

0.00

0.00

0.00

Coastal lagoons

0.00

0.00

0.00

Intertidal Hard Structures

0.00

0.00

0.00

Hedgerows and lines of trees

On site change by hedgerow type

Baseline

Post development on site

Onsite Change

Baseline

Post development on site

Onsite Change

Combined length lost by distinctiveness band

Category

Length lost (km)

Length lost (%)

V.High

0

High

0.00000000

0

Medium

0.00000000

0

Low

0.00000000

0

V.Low

0.00000000

0

% Length lost by distinctiveness category

V.Low

Low

Medium

High

V.High

0%

0%

0%

0%

0%

On-site and off-site hedge retention by category length (km)

0.00

0.00

0.00

On-site and off-site hedge retention category biodiversity units

0.00

0.00



0.00

Hedgerow

Hedgerow type	Existing length on-site	Existing value	Proposed length on-site	Proposed value on-site	On-site length change	On-site Unit change
Native Species Rich Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable)	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable) - with Bank or Ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Hedge Ornamental Non Native	0.00	0.00	0.00	0.00	0.00	0.00



Category	Length lost (KM)	Length lost (%)
V.High	0	
High	0	
Medium	0	
Low	0	
V.Low	0	

- V.High
- High
- Medium
- Low
- V.Low





Hedgerow and Lines of Trees

Off site change by hedgerow type						
Hedgerow type	Off site baseline		Post development off site		Off site Change	
	Existing length off-site	Existing value off-site	Proposed length off-site	Proposed value off-site	Off-site length change	Off site Unit change
Native Species Rich Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable)	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable) - with Bank or Ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Hedge Ornamental Non Native	0.00	0.00	0.00	0.00	0.00	0.00

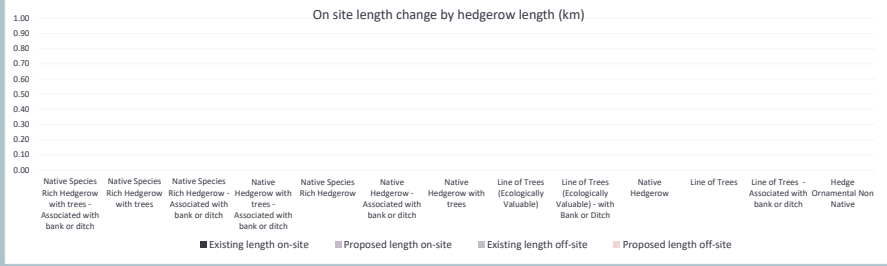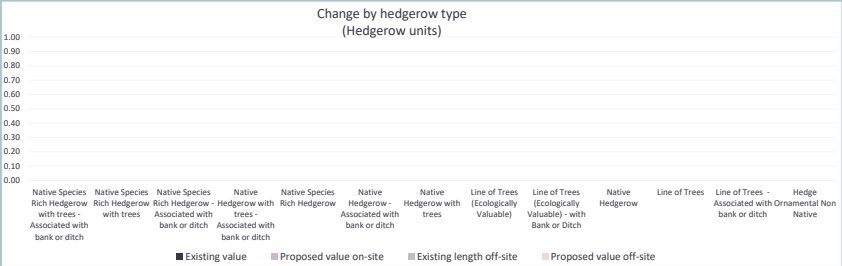

Hedgerow and Lines of Trees

Combined on and off site change by hedgerow type						
Hedgerow type	Baseline		Post development on site		Onsite Change	
	Existing length	Existing value	Proposed length	Proposed value	length change	Onsite Unit change
Native Species Rich Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable)	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable) - with Bank or Ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Hedge Ornamental Non Native	0.00	0.00	0.00	0.00	0.00	0.00

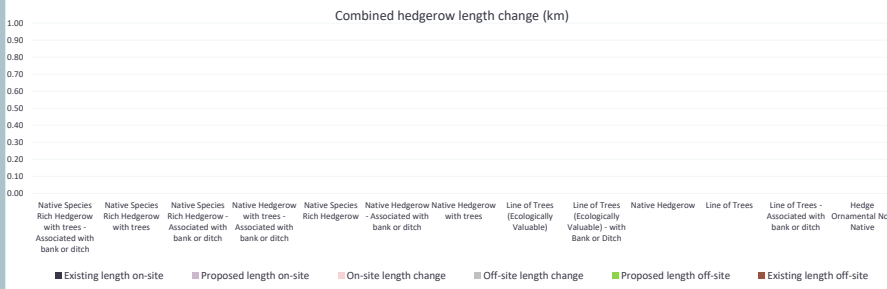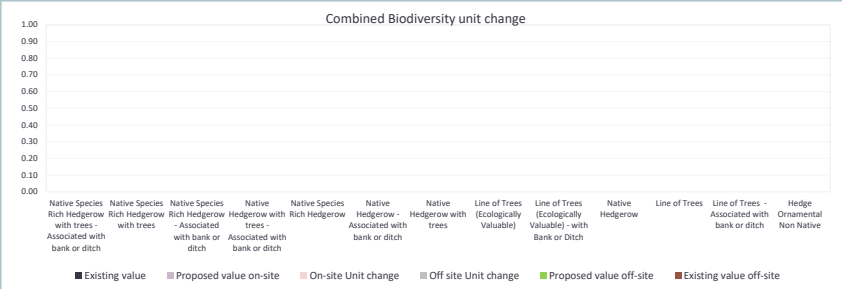

Rivers and Streams



Rivers and Streams

On site change by river type						
River type	Baseline		Post development on site		Onsite Change	
	Existing length	Existing value	Proposed length	Proposed value	length change	Onsite Unit change
Priority Habitat	0.0	0.0	0.0	0.0	0.0	0.0
Other Rivers and Streams	0.0	0.0	0.0	0.0	0.0	0.0
Ditches	0.0	0.0	0.0	0.0	0.0	0.0
Canals	0.0	0.0	0.0	0.0	0.0	0.0
Culvert	0.0	0.0	0.0	0.0	0.0	0.0

Category	Length lost (KM)	Length lost (%)
V.High	0	
High	0	
Medium	0	
Low	0	



% Length lost by d
distinctiveness category

- V.High
- High
- Medium
- Low




Rivers and Streams

Off site change by river type						
River type	Baseline		Post development off-site		Off-site Change	
	Existing length off-site	Existing value off-site	Proposed length off-site	Proposed value off-site	Off-site length change	Off-site Unit change
Priority Habitat	0.0	0.0	0.0	0.0	0.0	0.0
Other Rivers and Streams	0.0	0.0	0.0	0.0	0.0	0.0
Ditches	0.0	0.0	0.0	0.0	0.0	0.0
Canals	0.0	0.0	0.0	0.0	0.0	0.0
Culvert	0.0	0.0	0.0	0.0	0.0	0.0

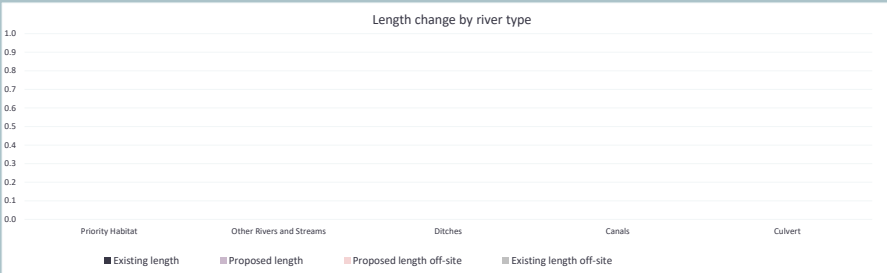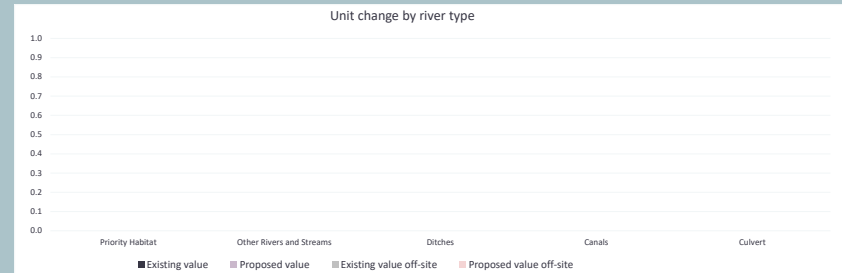

Rivers and Streams

Combined on and off site change by river type						
River type	Baseline		Post development on site		Onsite Change	
	Existing length	Existing value	Proposed length	Proposed value	length change	Onsite Unit change
Priority Habitat	0.0	0.0	0.0	0.0	0.0	0.0
Other Rivers and Streams	0.0	0.0	0.0	0.0	0.0	0.0
Ditches	0.0	0.0	0.0	0.0	0.0	0.0
Canals	0.0	0.0	0.0	0.0	0.0	0.0
Culvert	0.0	0.0	0.0	0.0	0.0	0.0

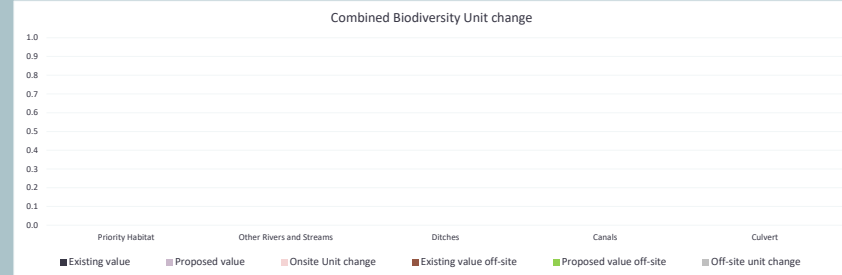

Trading Summary

Return to
results
menu

Trading Summary		
Distinctiveness Group	Trading Rule	Trading Satisfied?
Very High	Bespoke compensation likely to be required ✖	Yes ✓
High	Same habitat required =	Yes ✓
Medium	Same broad habitat or a higher distinctiveness habitat required (≥)	Yes ✓
Low	Same distinctiveness or better habitat required ≥	Yes ✓

Very High Distinctiveness					
Habitat group	Group	On Site Unit Change	Off Site Unit Change	Project wide Unit Change	Unit Losses
Grassland - Lowland dry acid grassland	Grassland	0.00	0.00	0.00	
Grassland - Lowland meadows	Grassland	0.00	0.00	0.00	
Grassland - Upland hay meadows	Grassland	0.00	0.00	0.00	
Heathland and shrub - Mountain heaths and willow scrub	Heathland and shrub	0.00	0.00	0.00	
Lakes - Aquifer fed naturally fluctuating water bodies	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Calaminarian grasslands	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Limestone pavement	Sparsely vegetated land	0.00	0.00	0.00	
Wetland - Blanket bog	Wetland	0.00	0.00	0.00	
Wetland - Depressions on Peat substrates (H7150)	Wetland	0.00	0.00	0.00	
Wetland - Fens (upland and lowland)	Wetland	0.00	0.00	0.00	
Wetland - Lowland raised bog	Wetland	0.00	0.00	0.00	
Wetland - Oceanic Valley Mire[1] (D2.1)	Wetland	0.00	0.00	0.00	
Wetland - Purple moor grass and rush pastures	Wetland	9.00	0.00	9.00	
Wetland - Transition mires and quaking bogs (H7140)	Wetland	0.00	0.00	0.00	
Woodland and forest - Wood-pasture and parkland	Woodland and forest	0.00	0.00	0.00	
Rocky shore - High energy littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Rocky shore - Moderate energy littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Rocky shore - Low energy littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Rocky shore - Features of littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Intertidal sediment - Littoral seagrass on peat, clay or chalk	Intertidal sediment	0.00	0.00	0.00	
		9.00	0.00	9.00	0.00

Very High Distinctiveness Summary	
Very High Distinctiveness Units available to offset lower distinctiveness deficit	9.00

High Distinctiveness					
Habitat group	Group	On Site Unit Change	Off Site Unit Change	Project wide Unit Change	Losses not yet accounted for
Grassland - Traditional orchards	Grassland	0.00	0.00	0.00	
Grassland - Floodplain Wetland Mosaic (CFGM)	Grassland	0.00	0.00	0.00	
Grassland - Lowland calcareous grassland	Grassland	0.00	0.00	0.00	
Grassland - Tall herb communities (H6430)	Grassland	0.00	0.00	0.00	
Grassland - Upland calcareous grassland	Grassland	0.00	0.00	0.00	
Heathland and shrub - Lowland Heathland	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Sea buckthorn scrub (Annex 1)	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Upland Heathland	Heathland and shrub	0.00	0.00	0.00	
Lakes - High alkalinity lakes	Lakes	0.00	0.00	0.00	
Lakes - Low alkalinity lakes	Lakes	0.00	0.00	0.00	
Lakes - Marl Lakes	Lakes	0.00	0.00	0.00	
Lakes - Moderate alkalinity lakes	Lakes	0.00	0.00	0.00	
Lakes - Peat Lakes	Lakes	0.00	0.00	0.00	
Lakes - Ponds (Priority Habitat)	Lakes	0.00	0.00	0.00	
Lakes - Temporary lakes, ponds and pools	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Coastal sand dunes	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Coastal vegetated shingle	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Inland rock outcrop and scree habitats	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Maritime cliff and slopes	Sparsely vegetated land	0.00	0.00	0.00	
Urban - Open Mosaic Habitats on Previously Developed Land	Urban	0.00	0.00	0.00	
Wetland - Reedbeds	Wetland	0.00	0.00	0.00	
Woodland and forest - Felled	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Lowland beech and yew woodland	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Lowland mixed deciduous woodland	Woodland and forest	8.28	0.00	8.28	
Woodland and forest - Native pine woodlands	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Upland birchwoods	Woodland and forest	0.00	0.00	0.00	

High Distinctiveness Summary	
High Distinctiveness Units available to offset lower distinctiveness deficit	8.28
Unit Defecit; Like for like not satisfied	✔ 0.00

Woodland and forest - Upland mixed ashwoods	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Upland oakwood	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Wet woodland	Woodland and forest	0.00	0.00	0.00	
Coastal lagoons - Coastal lagoons	Coastal lagoons	0.00	0.00	0.00	
Rocky shore - High energy littoral rock	Rocky shore	0.00	0.00	0.00	
Rocky shore - Moderate energy littoral rock	Rocky shore	0.00	0.00	0.00	
Rocky shore - Low energy littoral rock	Rocky shore	0.00	0.00	0.00	
Rocky shore - Features of littoral rock	Rocky shore	0.00	0.00	0.00	
Intertidal sediment - Littoral mud	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral mixed sediments	Intertidal sediment	0.00	0.00	0.00	
Coastal saltmarsh - Saltmarshes and saline reedbeds	Coastal Saltmarsh	0.00	0.00	0.00	
Intertidal sediment - Littoral biogenic reefs - Mussels	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral biogenic reefs - Sabellaria	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Features of littoral sediment	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral muddy sand	Intertidal sediment	0.00	0.00	0.00	
		8.28	0.00	8.28	0.00

Medium Distinctiveness					
Habitat Group	Group	On site unit change	Off Site unit Change	Project wide unit change	Cumulative Broad Habitat Change
Cropland - Arable field margins cultivated annually	Cropland	0.00	0.00	0.00	3.15
Cropland - Arable field margins game bird mix	Cropland	3.15	0.00	3.15	
Cropland - Arable field margins pollen & nectar	Cropland	0.00	0.00	0.00	
Cropland - Arable field margins tussocky	Cropland	0.00	0.00	0.00	
Grassland - Other lowland acid grassland	Grassland	580.33	0.00	580.33	
Grassland - Other neutral grassland	Grassland	-90.62	0.00	-90.62	489.71
Grassland - Upland acid grassland	Grassland	0.00	0.00	0.00	
Heathland and shrub - Blackthorn scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Bramble scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Gorse scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Hawthorn scrub	Heathland and shrub	0.00	0.00	0.00	3.65
Heathland and shrub - Hazel scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Mixed scrub	Heathland and shrub	3.65	0.00	3.65	
Lakes - Ponds (Non- Priority Habitat)	Lakes	0.00	0.00	0.00	
Lakes - Reservoirs	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Other inland rock and scree	Sparsely vegetated land	0.00	0.00	0.00	0.00
Urban - Cemeteries and churchyards	Urban	0.00	0.00	0.00	0.00
Urban - Biodiverse green roof	Urban	0.00	0.00	0.00	
Urban - Urban Tree	Urban	0.00	0.00	0.00	
Woodland and forest - Other Scot's Pine woodland	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Other woodland; broadleaved	Woodland and forest	94.80	0.00	94.80	
Woodland and forest - Other woodland; mixed	Woodland and forest	-0.48	0.00	-0.48	94.32
Intertidal sediment - Littoral coarse sediment	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral sand	Intertidal sediment	0.00	0.00	0.00	
Intertidal Hard Structures - Artificial hard structures with Integrated Greening of Grey Infrastructure (IGGI)	Intertidal	0.00	0.00	0.00	
		590.82	0.00	590.82	

Medium Distinctiveness Summary	
Medium Distinctiveness Units available to offset lower distinctiveness deficit	590.82
Medium Distinctiveness Broad Habitat Deficit to be offset by trading up	0.00
Higher distinctiveness surplus units minus Medium Distinctivenss Broad Habitat Defecit	17.28
Cumulative surplus of units	608.09

Low Distinctiveness				
Habitat group	Group	On site unit change	Off Site Unit Change	Project wide unit change
Cropland - Cereal crops	Cropland	-572.84	0.00	-572.84
Cropland - Horticulture	Cropland	0.00	0.00	0.00
Cropland - Intensive orchards	Cropland	0.00	0.00	0.00
Cropland - Non-cereal crops	Cropland	0.00	0.00	0.00
Cropland - Temporary grass and clover leys	Cropland	0.00	0.00	0.00
Cropland - Cereal crops winter stubble	Cropland	0.00	0.00	0.00
Grassland - Modified grassland	Grassland	623.19	0.00	623.19
Grassland - Bracken	Grassland	0.00	0.00	0.00
Heathland and shrub - Rhododendron scrub	Heathland and shrub	0.00	0.00	0.00
Lakes - Ornamental lake or pond	Lakes	0.00	0.00	0.00
Sparsely vegetated land - Ruderal/Ephemeral	Sparsely vegetated land	-6.41	0.00	-6.41

Low Distinctiveness Summary	
Low Distinctiveness Net Change in Units	37.24
Cumulative surplus of units	645.34

Urban - Bioswale	Sparsely vegetated land	0.00	0.00	0.00
Urban - Allotments	Urban	0.00	0.00	0.00
Urban - Facade-bound green wall	Urban	0.00	0.00	0.00
Urban - Ground based green wall	Urban	0.00	0.00	0.00
Urban - Ground level planters	Urban	0.00	0.00	0.00
Urban - Other green roof	Urban	0.00	0.00	0.00
Urban - Intensive green roof	Urban	0.00	0.00	0.00
Urban - Introduced shrub	Urban	0.00	0.00	0.00
Urban - Rain garden	Urban	0.00	0.00	0.00
Urban - Actively worked sand pit quarry or open cast mine	Urban	0.00	0.00	0.00
Urban - Sustainable urban drainage feature	Urban	0.00	0.00	0.00
Urban - Vacant/derelict land/ bareground	Urban	-6.54	0.00	-6.54
Urban - Vegetated garden	Urban	0.00	0.00	0.00
Woodland and forest - Other coniferous woodland	Woodland and forest	-0.16	0.00	-0.16
Coastal saltmarsh - Artificial saltmarshes and saline reedbeds	Coastal saltmarsh	0.00	0.00	0.00
Intertidal sediment - Artificial littoral coarse sediment	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral mud	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral sand	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral muddy sand	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral mixed sediments	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral seagrass	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral biogenic reefs	Intertidal sediment	0.00	0.00	0.00
Intertidal Hard Structures - Artificial hard structures	Intertidal	0.00	0.00	0.00
Intertidal Hard Structures - Artificial features of hard structures	Intertidal	0.00	0.00	0.00
Heathland and shrub - Sea buckthorn scrub (other)	Heathland and shrub	0.00	0.00	0.00
		37.24		37.24

A-1 Site Habitat Baseline

SUNNICA WITHIN EENRN													
A-1 Site Habitat Baseline													
Condense / Show Columns							Condense / Show Rows						
Main Menu							Instructions						
	Habitats and areas			Distinctiveness		Condition		Strategic significance			Suggested action to address habitat losses	Ecological baseline	
Ref	Broad Habitat	Habitat Type	Area (hectares)	Distinctiveness	Score	Condition	Score	Strategic significance	Strategic significance	Strategic Significance multiplier		Total habitat units	
1	Cropland	Cereal crops	22.25583901	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	44.51	
2	Cropland	Cereal crops	17.49696697	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	34.99	
3	Cropland	Cereal crops	25.32825445	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	50.66	
4	Cropland	Cereal crops	0.787215725	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	1.57	
5	Cropland	Cereal crops	24.30353864	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	48.61	
6	Cropland	Cereal crops	32.91948896	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	65.84	
7	Cropland	Cereal crops	23.79275922	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	47.59	
8	Cropland	Cereal crops	29.89789018	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	59.80	
9	Cropland	Cereal crops	24.34280625	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	48.69	
10	Cropland	Cereal crops	10.08747099	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	20.17	
11	Cropland	Cereal crops	21.12865701	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	42.26	
12	Cropland	Cereal crops	16.75774188	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	33.52	
13	Cropland	Cereal crops	20.66340453	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	41.33	
14	Cropland	Cereal crops	45.15076548	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	90.30	
15	Cropland	Cereal crops	12.04204685	Low	2	Condition Assessment N/A	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	24.08	
16	Urban	Developed land; sealed surface	0.609179002	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Compensation Not Required	0.00	
17	Urban	Developed land; sealed surface	0.126921956	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Compensation Not Required	0.00	
18	Urban	Developed land; sealed surface	0.538622204	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Compensation Not Required	0.00	
19	Urban	Developed land; sealed surface	0.180251949	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Compensation Not Required	0.00	
20	Urban	Developed land; sealed surface	0.210347937	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Compensation Not Required	0.00	
21	Urban	Developed land; sealed surface	0.197882218	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Compensation Not Required	0.00	
22	Woodland and forest	Lowland mixed deciduous woodland	0.531228822	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	7.33	
23	Woodland and forest	Lowland mixed deciduous woodland	0.574306716	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	7.93	
24	Woodland and forest	Lowland mixed deciduous woodland	0.12477433	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	1.72	
25	Woodland and forest	Lowland mixed deciduous woodland	0.678840168	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	9.37	
26	Woodland and forest	Lowland mixed deciduous woodland	3.865782083	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	53.35	
27	Woodland and forest	Lowland mixed deciduous woodland	1.71099626	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	23.61	
28	Woodland and forest	Lowland mixed deciduous woodland	0.093971611	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	1.30	
29	Woodland and forest	Lowland mixed deciduous woodland	0.028546024	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same habitat required =	0.39	
30	Heathland and shrub	Mixed scrub	1.160894125	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	10.68	
31	Heathland and shrub	Mixed scrub	0.214699044	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	1.98	
32	Grassland	Modified grassland	3.117649456	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	6.24	
33	Grassland	Modified grassland	5.517460687	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	11.03	
34	Grassland	Modified grassland	0.332183403	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	0.66	
35	Grassland	Modified grassland	34.7725352	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	69.55	
36	Grassland	Modified grassland	0.726013304	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	1.45	
37	Grassland	Modified grassland	1.340935117	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	2.68	
38	Grassland	Modified grassland	0.02773503	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	0.06	
39	Grassland	Modified grassland	0.049490064	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	0.10	
40	Grassland	Modified grassland	0.66410964	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	1.33	
41	Woodland and forest	Other coniferous woodland	1.067048124	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness or better habitat required ≥	4.91	
42	Woodland and forest	Other coniferous woodland	1.40545277	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness or better habitat required ≥	6.47	
43	Woodland and forest	Other coniferous woodland	1.650868471	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness or better habitat required ≥	7.59	
44	Grassland	Other lowland acid grassland	0.053810052	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	0.50	
45	Grassland	Other neutral grassland	1.213047736	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	5.58	
46	Grassland	Other neutral grassland	0.378006612	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	1.74	
47	Grassland	Other neutral grassland	8.497226505	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	78.17	
48	Grassland	Other neutral grassland	0.859928127	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	3.96	
49	Grassland	Other neutral grassland	0.221613156	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	3.06	
50	Grassland	Other neutral grassland	0.42430692	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	1.95	
51	Grassland	Other neutral grassland	1.383712504	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	6.37	
52	Grassland	Other neutral grassland	1.73331148	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	7.97	
53	Grassland	Other neutral grassland	0.481350952	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	2.21	
54	Grassland	Other neutral grassland	0.746001109	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	3.43	

Retention category biodiversity value						Bespoke compensation agreed for unacceptable losses	Comments	
Area retained	Area enhanced	Baseline units retained	Baseline units enhanced	Area habitat lost	Units lost		Assessor comments	Reviewer comments
22.25584		44.51	0.00	0.00	0.00		Within East Cambe NRN and Cable Route East, AF	
17.49697		34.99	0.00	0.00	0.00		Within East Cambe NRN and Cable Route West	
		0.00	0.00	25.33	50.66		Within East Cambe NRN and ECO5	
0.784078		1.57	0.00	0.00	0.01		Within East Cambe NRN and Fringe habitats and site fabric outside of parcel references	
		0.00	0.00	24.30	48.61		Within East Cambe NRN and W04	
		0.00	0.00	32.92	65.84		Within East Cambe NRN and W05	
		0.00	0.00	23.79	47.59		Within East Cambe NRN and W06, AF15	
		0.00	0.00	29.90	59.80		Within East Cambe NRN and W07	
		0.00	0.00	24.34	48.69		Within East Cambe NRN and W08	
		0.00	0.00	10.09	20.17		Within East Cambe NRN and W09, AF11	
		0.00	0.00	21.13	42.26		Within East Cambe NRN and W10	
		0.00	0.00	16.76	33.52		Within East Cambe NRN and W11	
		0.00	0.00	20.66	41.33		Within East Cambe NRN and W12	
		0.00	0.00	45.15	90.30		Within East Cambe NRN and W15 AF13	
		0.00	0.00	12.04	24.08		Within East Cambe NRN and W17	
0.609179		0.00	0.00	0.00	0.00		Within East Cambe NRN and Cable Route East	
0.126913		0.00	0.00	0.00	0.00		Within East Cambe NRN and Cable Route West	
0.538622		0.00	0.00	0.00	0.00		Within East Cambe NRN and Fringe habitats and site fabric outside of parcel references	
0.180252		0.00	0.00	0.00	0.00		Within East Cambe NRN and W07	
0.204534		0.00	0.00	0.01	0.00		Within East Cambe NRN and W09	
0.078149		0.00	0.00	0.12	0.00		Within East Cambe NRN and W12	
	0.53122882	0.00	7.33	0.00	0.00		Within East Cambe NRN and Cable Route East	
	0.57430672	0.00	7.93	0.00	0.00		Within East Cambe NRN and Cable Route West	
	0.12476213	0.00	1.72	0.00	0.00		Within East Cambe NRN and ECO5	
	0.67884017	0.00	9.37	0.00	0.00		Within East Cambe NRN and W03	
	3.85235685	0.00	53.16	0.01	0.19		Within East Cambe NRN and W04	
	1.71099602	0.00	23.61	0.00	0.00		Within East Cambe NRN and W05	
	0.09397161	0.00	1.30	0.00	0.00		Within East Cambe NRN and W06	
	0.02854602	0.00	0.39	0.00	0.00		Within East Cambe NRN and W11	
1.160894		10.68	0.00	0.00	0.00		Within East Cambe NRN and Cable Route West	
		0.00	0.00	0.21	1.98		Within East Cambe NRN and W04	
3.117649		6.24	0.00	0.00	0.00		Within East Cambe NRN and Cable Route East	
5.517461		11.03	0.00	0.00	0.00		Within East Cambe NRN and Cable Route West	
0.332179		0.66	0.00	0.00	0.00		Within East Cambe NRN and Fringe habitats and site fabric outside of parcel references	
		0.00	0.00	34.77	69.55		Within East Cambe NRN and W03	
		0.00	0.00	0.73	1.45			

55	Grassland	Other neutral grassland	1.304351542	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	6.00				0.00	0.00	1.30	6.00		Within East Cambs NRN and W07	
56	Grassland	Other neutral grassland	4.516083578	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	20.77				0.00	0.00	4.52	20.77		Within East Cambs NRN and W09	
57	Grassland	Other neutral grassland	0.169790995	Medium	4	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	0.78				0.00	0.00	0.17	0.78		Within East Cambs NRN and W12	
58	Woodland and forest	Other woodland; broadleaved	0.242901195	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	2.23	0.242901			2.23	0.00	0.00	0.00		Within East Cambs NRN and Cable Route East	
59	Woodland and forest	Other woodland; broadleaved	0.844489208	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	7.77	0.844489			7.77	0.00	0.00	0.00		Within East Cambs NRN and Cable Route West	
60	Woodland and forest	Other woodland; broadleaved	0.767454934	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	7.06	0.632915			5.82	0.00	0.13	1.24		Within East Cambs NRN and ECO6	
61	Woodland and forest	Other woodland; broadleaved	0.007790347	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	0.07	0.00779			0.07	0.00	0.00	0.00		Within East Cambs NRN and Fringe habitats and site fabric outside of parcel references	
62	Woodland and forest	Other woodland; broadleaved	0.096954189	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	0.89	0.096954			0.89	0.00	0.00	0.00		Within East Cambs NRN and W15	
63	Woodland and forest	Other woodland; mixed	0.28631042	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	2.63	0.28631			2.63	0.00	0.00	0.00		Within East Cambs NRN and Cable Route East	
64	Woodland and forest	Other woodland; mixed	4.604358918	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	42.36	4.5883			42.21	0.00	0.02	0.15		Within East Cambs NRN and ECO6	
65	Woodland and forest	Other woodland; mixed	1.484217678	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	13.65	1.484204			13.65	0.00	0.00	0.00		Within East Cambs NRN and W03	
66	Woodland and forest	Other woodland; mixed	0.780051875	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	7.18	0.780052			7.18	0.00	0.00	0.00		Within East Cambs NRN and W04	
67	Woodland and forest	Other woodland; mixed	5.716753564	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	52.59	5.701179			52.45	0.00	0.02	0.14		Within East Cambs NRN and W07	
68	Woodland and forest	Other woodland; mixed	1.936623128	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same broad habitat or a higher distinctiveness habitat required (2)	17.82	1.916034			17.63	0.00	0.02	0.19		Within East Cambs NRN and W08	
69	Sparsely vegetated land	Ruderal/Ephemeral	0.543276536	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	2.17	0.434362			1.74	0.00	0.11	0.44		Within East Cambs NRN and Fringe habitats and site fabric outside of parcel references	
70	Sparsely vegetated land	Ruderal/Ephemeral	0.344633957	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	1.38				0.00	0.00	0.34	1.38		Within East Cambs NRN and W09	
71	Sparsely vegetated land	Ruderal/Ephemeral	1.148781017	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	4.60				0.00	0.00	1.15	4.60		Within East Cambs NRN and W15	
72	Urban	Vacant/derelict land/ bareground	0.15351122	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	0.61	0.153511			0.61	0.00	0.00	0.00		Within East Cambs NRN and Cable Route East	
73	Urban	Vacant/derelict land/ bareground	0.267045288	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	1.07	0.267045			1.07	0.00	0.00	0.00		Within East Cambs NRN and Cable Route West	
74	Urban	Vacant/derelict land/ bareground	0.203971207	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required ≥	0.82				0.00	0.00	0.20	0.82		Within East Cambs NRN and ECO6	
75	Urban	Vacant/derelict land/ bareground																				

A-2 Site Habitat Creation

SUNNICA WITHIN ECNRN

A-2 Site Habitat Creation

Condense / Show Columns

Condense / Show Rows

Main Menu

Instructions

Broad Habitat		Proposed habitat	Area (hectares)	Distinctiveness		Condition		Strategic significance			Post development/ post intervention habitats										Difficulty multipliers				Habitat units delivered	Comments	
				Distinctiveness	Score	Condition	Score	Strategic significance	Strategic significance	Strategic position multiplier	Standard time to target condition/years	Habitat created in advance/years	Delay in starting habitat creation/years	Standard or adjusted time to target condition	Final time to target condition/years	Final time to target multiplier	Standard difficulty of creation	Applied difficulty multiplier	Final difficulty of creation	Difficulty multiplier applied	Assessor comments	Reviewer comments					
Urban		Developed land; sealed surface	0.301546788	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and EC06					
Urban		Developed land; sealed surface	1.46291839	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W03					
Urban		Developed land; sealed surface	1.017479142	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W03					
Urban		Developed land; sealed surface	0.575868621	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W04					
Urban		Developed land; sealed surface	0.739007217	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W06					
Urban		Developed land; sealed surface	0.776986969	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W06					
Urban		Developed land; sealed surface	0.506108545	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W07					
Urban		Developed land; sealed surface	0.524318953	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W08					
Urban		Developed land; sealed surface	0.138525335	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W09					
Urban		Developed land; sealed surface	0.342418552	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W10					
Urban		Developed land; sealed surface	0.399856383	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W11					
Urban		Developed land; sealed surface	0.769585738	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W12					
Urban		Developed land; sealed surface	1.306341409	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W15					
Urban		Developed land; sealed surface	9.542442154	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W17					
Urban		Developed land; sealed surface	0.260583575	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and W17					
Urban		Developed land; sealed surface	0.188022223	V Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Within East Cambe NRN and Fringe habitats and site fabric outside of parcel references					
Cropland		Arable field margins game bird mix	0.131513379	Medium	4	Condition Assessment N/A	1	Formally identified in local strategy	High strategic significance	1.15	1	0	0	Standard time to target condition applied	1	0.965	Low	Standard difficulty applied	Low	1	0.58	Within East Cambe NRN and W07					
Cropland		Arable field margins game bird mix	0.577041117	Medium	4	Condition Assessment N/A	1	Formally identified in local strategy	High strategic significance	1.15	1	0	0	Standard time to target condition applied	1	0.965	Low	Standard difficulty applied	Low	1	2.56	Within East Cambe NRN and W09					
Heathland and shrub		Mixed scrub	0.212836192	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	1.42	Within East Cambe NRN and W08					
Heathland and shrub		Mixed scrub	0.62722946	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	4.20	Within East Cambe NRN and W10					
Grassland		Modified grassland	20.1611566	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	69.93	Within East Cambe NRN and W03					
Grassland		Modified grassland	19.56753015	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	67.87	Within East Cambe NRN and W04					
Grassland		Modified grassland	24.25044134	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	84.12	Within East Cambe NRN and W05					
Grassland		Modified grassland	18.62817058	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	65.31	Within East Cambe NRN and W06					
Grassland		Modified grassland	20.44142178	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	70.91	Within East Cambe NRN and W07					
Grassland		Modified grassland	13.28760068	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	46.09	Within East Cambe NRN and W08					
Grassland		Modified grassland	7.078301624	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	24.55	Within East Cambe NRN and W09					
Grassland		Modified grassland	11.88335734	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	41.22	Within East Cambe NRN and W10					
Grassland		Modified grassland	12.15137082	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	42.15	Within East Cambe NRN and W11					
Grassland		Modified grassland	15.65878872	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	54.32	Within East Cambe NRN and W12					
Grassland		Modified grassland	38.02124844	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	4	0	0	Standard time to target condition applied	4	0.867	Low	Standard difficulty applied	Low	1	131.89	Within East Cambe NRN and W15					
Grassland		Other lowland acid grassland	0.512488946	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	3.30	Within East Cambe NRN and EC05					
Grassland		Other lowland acid grassland	0.061921481	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	0.40	Within East Cambe NRN and W03					
Grassland		Other lowland acid grassland	2.55250787	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	16.44	Within East Cambe NRN and W03					
Grassland		Other lowland acid grassland	1.219236558	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	7.86	Within East Cambe NRN and W04					
Grassland		Other lowland acid grassland	3.419776285	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	22.03	Within East Cambe NRN and W05					
Grassland		Other lowland acid grassland	4.177162631	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	26.91	Within East Cambe NRN and W06					
Grassland		Other lowland acid grassland	3.46436174	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	22.32	Within East Cambe NRN and W07					
Grassland		Other lowland acid grassland	0.872275572	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	5.62	Within East Cambe NRN and W08					
Grassland		Other lowland acid grassland	2.255624659	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	14.53	Within East Cambe NRN and W08					
Grassland		Other lowland acid grassland	0.359610024	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	2.32	Within East Cambe NRN and W09					
Grassland		Other lowland acid grassland	0.78359313	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	5.05	Within East Cambe NRN and W09					

Grassland	Other lowland acid grassland	2.09154344	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	13.47	Within East Cambe NRN and W10	
Grassland	Other lowland acid grassland	1.793539723	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	11.56	Within East Cambe NRN and W11	
Grassland	Other lowland acid grassland	0.90977438	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	5.85	Within East Cambe NRN and W12	
Grassland	Other lowland acid grassland	1.327301001	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	8.55	Within East Cambe NRN and W12	
Grassland	Other lowland acid grassland	1.897281435	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	12.22	Within East Cambe NRN and W15	
Grassland	Other lowland acid grassland	4.984508937	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	32.11	Within East Cambe NRN and W15	
Grassland	Other lowland acid grassland	0.330772222	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	2.13	Within East Cambe NRN and W17	
Grassland	Other lowland acid grassland	0.00212441	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	0.01	Within East Cambe NRN and W17	
Grassland	Other lowland acid grassland	0.002530224	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	0.02	Within East Cambe NRN and Fringe habitats and site fabric outside of parcel references	
Grassland	Other lowland acid grassland	24.80483515	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	159.81	Within East Cambe NRN and ECOS	
Grassland	Other lowland acid grassland	7.803487795	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	50.27	Within East Cambe NRN and W03	
Grassland	Other lowland acid grassland	2.766535102	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	17.82	Within East Cambe NRN and W04	
Grassland	Other lowland acid grassland	0.174827553	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	1.13	Within East Cambe NRN and W06	
Grassland	Other lowland acid grassland	2.584405794	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	16.65	Within East Cambe NRN and W07	
Grassland	Other lowland acid grassland	5.076637236	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	32.71	Within East Cambe NRN and W08	
Grassland	Other lowland acid grassland	5.573336357	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	35.55	Within East Cambe NRN and W09	
Grassland	Other lowland acid grassland	2.793846307	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	18.00	Within East Cambe NRN and W10	
Grassland	Other lowland acid grassland	1.79104663	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	11.54	Within East Cambe NRN and W11	
Grassland	Other lowland acid grassland	1.513821472	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	9.75	Within East Cambe NRN and W12	
Grassland	Other lowland acid grassland	0.710357209	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	4.88	Within East Cambe NRN and W17	
Grassland	Other lowland acid grassland	0.804363399	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	3.89	Within East Cambe NRN and W03	
Grassland	Other lowland acid grassland	0.2																				

[illegible]

A-3 Site Habitat Enhancement

SUNNICA WITHIN ECRIN A-3 Site Habitat Enhancement	
Conductors / Show Columns	Conductors / Show Rows
Main Menu	Instructions

[illegible]

Metric 2 Outside ECNRN

Headline Results

SUNNICA

Headline Results

Return to
results menu

On-site baseline

<i>Habitat units</i>	1812.80
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

On-site post-intervention

(Including habitat retention, creation & enhancement)

<i>Habitat units</i>	2309.96
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

On-site net % change

(Including habitat retention, creation & enhancement)

<i>Habitat units</i>	27.43%
<i>Hedgerow units</i>	0.00%
<i>River units</i>	0.00%

Off-site baseline

<i>Habitat units</i>	0.00
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

Off-site post-intervention

(Including habitat retention, creation & enhancement)

<i>Habitat units</i>	0.00
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

Total net unit change

(including all on-site & off-site habitat retention, creation & enhancement)

<i>Habitat units</i>	497.16
<i>Hedgerow units</i>	0.00
<i>River units</i>	0.00

Total on-site net % change plus off-site surplus

(including all on-site & off-site habitat retention, creation & enhancement)

<i>Habitat units</i>	27.43%
<i>Hedgerow units</i>	0.00%
<i>River units</i>	0.00%

Trading rules Satisfied?

Yes ✓

Detailed Results

SUNNICA

Return to results menu

Detailed Results

Summary Figures

Net project biodiversity units (including all on-site & off-site habitat retention/creation)	Habitat units	497.16
	Hedgerow units	0.00
	River units	0.00

Total project biodiversity % change (including all On-site & Off-site Habitat Creation + Retained Habitats)	Habitat units	27.43%
	Hedgerow units	0.00%
	River units	0.00%

Combined habitat retention and enhancement			
	Habitats	Hedgerows	Rivers
Total on-site and off-site baseline area / length	621.31	0.00	0.00
Total on-site and off-site baseline units	1812.80	0.00	0.00
Total on-site and off-site baseline area / length retained	102.30	0.00	0.00
Total on-site and off-site baseline units retained	464.85	0.00	0.00
Area / length proposed for enhancement	2.08	0.00	0.00
Baseline units proposed for enhancement	27.46	0.00	0.00
Total on-site and off-site baseline area / length lost	516.93	0.00	0.00
Total on-site and off-site baseline units lost	1320.49	0.00	0.00







Area habitats

On site change by broad habitat type						
Habitat group	Baseline		Post development on site		Onsite Change	
	Existing area	Existing value	Proposed area	Proposed value	Area change	Onsite Unit change
Cropland	472.99	945.98	58.05	117.06	-414.93	-828.92
Grassland	57.97	482.17	441.08	1903.00	383.10	1420.83
Heathland and shrub	3.30	26.43	3.71	29.10	0.41	2.67
Lakes	1.58	20.81	1.58	20.81	0.00	0.00
Sparsely vegetated land	2.10	8.41	20.20	79.88	18.10	71.46
Urban	76.05	261.79	61.74	14.72	-14.31	-247.07
Wetland	0.00	0.00	1.81	5.16	1.81	5.16
Woodland and forest	7.32	67.20	33.14	140.24	25.82	73.03
Intertidal sediment	0.00	0.00	0.00	0.00	0.00	0.00
Coastal saltmarsh	0.00	0.00	0.00	0.00	0.00	0.00
Rocky shore	0.00	0.00	0.00	0.00	0.00	0.00
Coastal lagoons	0.00	0.00	0.00	0.00	0.00	0.00
Intertidal Hard Structures	0.00	0.00	0.00	0.00	0.00	0.00

Off site change by broad habitat type						
Habitat group	Baseline		Post development Off-site		Off-site Change	
	Existing area	Off-site Existing value	Off-site proposed area	Off-site Proposed value	Off-site area change	Off-site unit change
Cropland	0.00	0.00	0.00	0.00	0.00	0.00
Grassland	0.00	0.00	0.00	0.00	0.00	0.00
Heathland and shrub	0.00	0.00	0.00	0.00	0.00	0.00
Lakes	0.00	0.00	0.00	0.00	0.00	0.00
Sparsely vegetated land	0.00	0.00	0.00	0.00	0.00	0.00
Urban	0.00	0.00	0.00	0.00	0.00	0.00
Wetland	0.00	0.00	0.00	0.00	0.00	0.00
Woodland and forest	0.00	0.00	0.00	0.00	0.00	0.00
Intertidal sediment	0.00	0.00	0.00	0.00	0.00	0.00
Coastal saltmarsh	0.00	0.00	0.00	0.00	0.00	0.00
Rocky shore	0.00	0.00	0.00	0.00	0.00	0.00
Coastal lagoons	0.00	0.00	0.00	0.00	0.00	0.00
Intertidal Hard Structures	0.00	0.00	0.00	0.00	0.00	0.00

Combined on site and off site change by broad habitat type						
Habitat group	Baseline		On-site and Off-site post development		Combined change	
	Existing area	Existing value	Combined proposed area	Combined proposed value	Proposed area	Proposed value
Cropland	472.99	945.98	58.05	117.06	-414.93	-828.92
Grassland	57.97	482.17	441.08	1903.00	383.10	1420.83
Heathland and shrub	3.30	26.43	3.71	29.10	0.41	2.67
Lakes	1.58	20.81	1.58	20.81	0.00	0.00
Sparsely vegetated land	2.10	8.41	20.20	79.88	18.10	71.46
Urban	76.05	261.79	61.74	14.72	-14.31	-247.07
Wetland	0.00	0.00	1.81	5.16	1.81	5.16
Woodland and forest	7.32	67.20	33.14	140.24	25.82	73.03
Intertidal sediment	0.00	0.00	0.00	0.00	0.00	0.00
Coastal saltmarsh	0.00	0.00	0.00	0.00	0.00	0.00
Rocky shore	0.00	0.00	0.00	0.00	0.00	0.00
Coastal lagoons	0.00	0.00	0.00	0.00	0.00	0.00
Intertidal Hard Structures	0.00	0.00	0.00	0.00	0.00	0.00


Combined area lost by distinctiveness band		
Category	Area lost (hectares)	Area lost (%)
V.High	0	
High	0.942042089	0
Medium	38.38994244	7
Low	480.1847194	93
V.Low	0.538281941	0

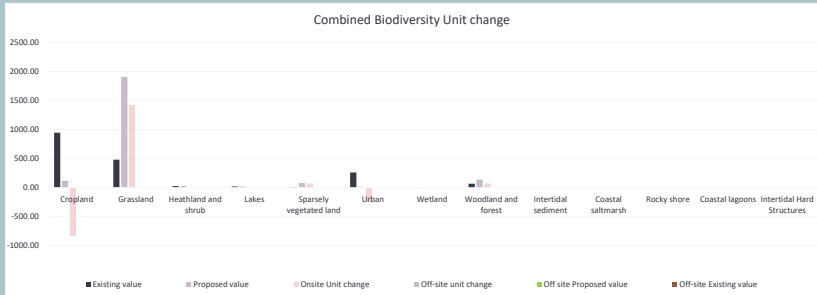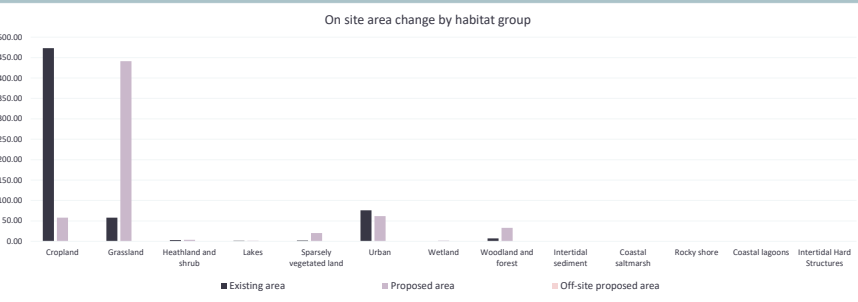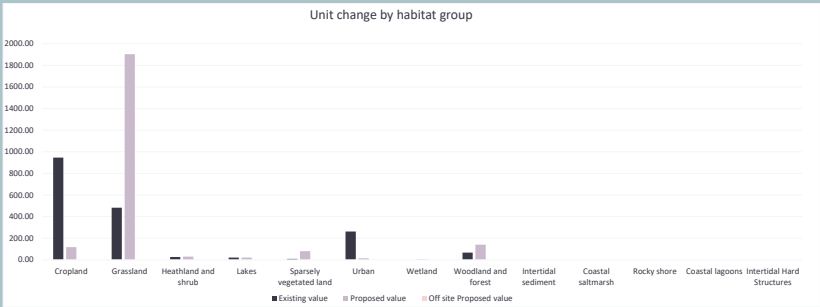

Hedgerows and lines of trees

On site change by hedgerow type						
Hedgerow type	Baseline		Post development on site		Onsite Change	
	Existing length on-site	Existing value	Proposed length on-site	Proposed value on-site	On-site length change	On-site Unit change
Native Species Rich Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00

Combined length lost by distinctiveness band		
Category	Length lost (KM)	Length lost (%)



Native Species Rich Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable)	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable) - with Bank or Ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Hedge Ornamental Non Native	0.00	0.00	0.00	0.00	0.00	0.00

Off site change by hedgerow type						
Hedgerow type	Off site baseline		Post development off site		Off site Change	
	Existing length off-site	Existing value off-site	Proposed length off-site	Proposed value off-site	Off-site length change	Off site Unit change
Native Species Rich Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable)	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable) - with Bank or Ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Hedge Ornamental Non Native	0.00	0.00	0.00	0.00	0.00	0.00







Combined on and off site change by hedgerow type						
Hedgerow type	Baseline		Post development on site		Onsite Change	
	Existing length	Existing value	Proposed length	Proposed value	length change	Onsite Unit change
Native Species Rich Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Species Rich Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow with trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable)	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees (Ecologically Valuable) - with Bank or Ditch	0.00	0.00	0.00	0.00	0.00	0.00
Native Hedgerow	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees	0.00	0.00	0.00	0.00	0.00	0.00
Line of Trees - Associated with bank or ditch	0.00	0.00	0.00	0.00	0.00	0.00
Hedge Ornamental Non Native	0.00	0.00	0.00	0.00	0.00	0.00

V.High	0	
High	0	
Medium	0	
Low	0	
V.Low	0	

■ Medium

■ Low

■ V.Low

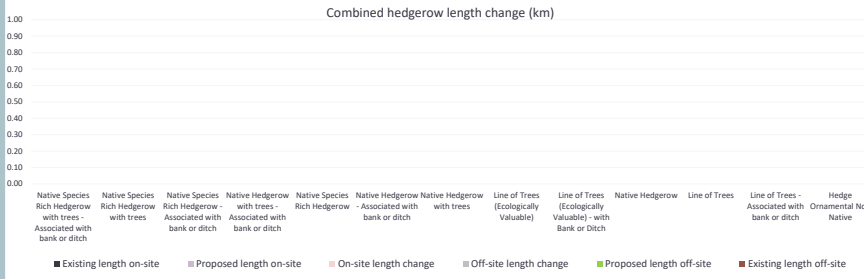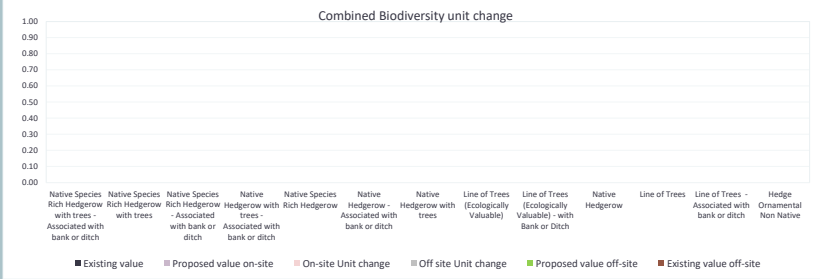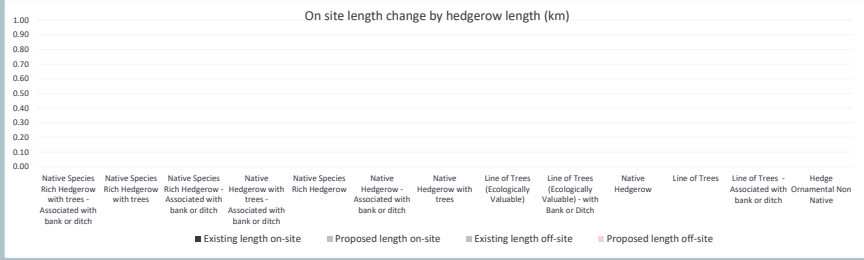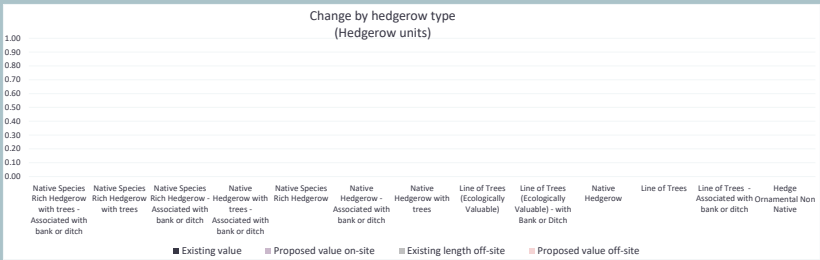

Rivers and Streams

On site change by river type						
River type	Baseline		Post development on site		Onsite Change	
	Existing length	Existing value	Proposed length	Proposed value	length change	Onsite Unit change
Priority Habitat	0.0	0.0	0.0	0.0	0.0	0.0
Other Rivers and Streams	0.0	0.0	0.0	0.0	0.0	0.0
Ditches	0.0	0.0	0.0	0.0	0.0	0.0
Canals	0.0	0.0	0.0	0.0	0.0	0.0
Culvert	0.0	0.0	0.0	0.0	0.0	0.0

Combined length lost by distinctiveness band		
Category	Length lost (KM)	Length lost (%)
V.High	0	
High	0	
Medium	0	
Low	0	



% Length lost by d
distinctiveness category

■ V.High



■ High

■ Medium


■ Low



Off site change by river type						
River type	Baseline		Post development off-site		Off-site Change	
	Existing length off-site	Existing value off-site	Proposed length off-site	Proposed value off-site	Off-site length change	Off-site unit change
Priority Habitat	0.0	0.0	0.0	0.0	0.0	0.0
Other Rivers and Streams	0.0	0.0	0.0	0.0	0.0	0.0
Ditches	0.0	0.0	0.0	0.0	0.0	0.0
Canals	0.0	0.0	0.0	0.0	0.0	0.0
Culvert	0.0	0.0	0.0	0.0	0.0	0.0

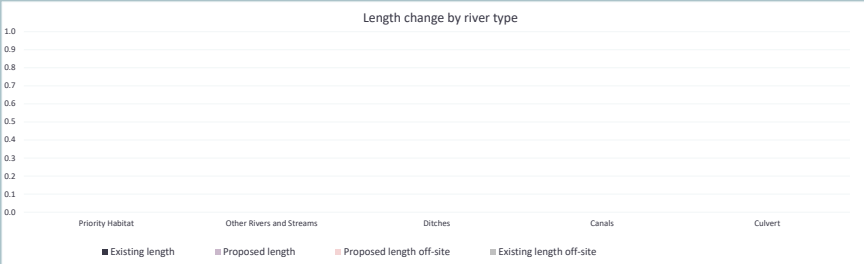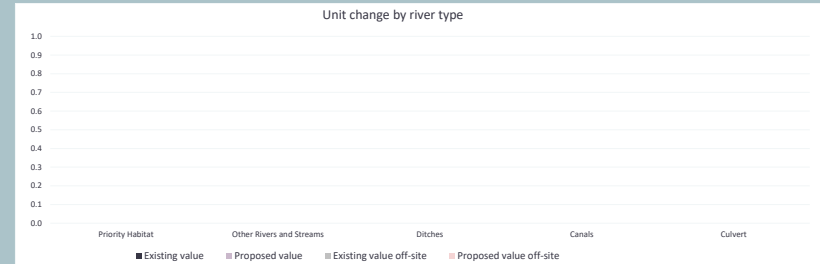

Combined on and off site change by river type						
River type	Baseline		Post development on site		Onsite Change	
	Existing length	Existing value	Proposed length	Proposed value	length change	Onsite Unit change
Priority Habitat	0.0	0.0	0.0	0.0	0.0	0.0
Other Rivers and Streams	0.0	0.0	0.0	0.0	0.0	0.0
Ditches	0.0	0.0	0.0	0.0	0.0	0.0
Canals	0.0	0.0	0.0	0.0	0.0	0.0
Culvert	0.0	0.0	0.0	0.0	0.0	0.0

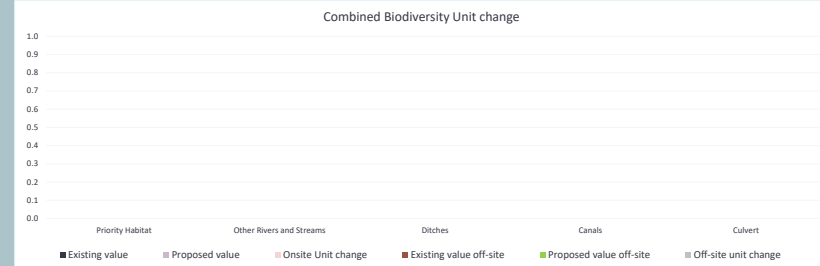

Trading Summary

Return to
results
menu

Trading Summary		
Distinctiveness Group	Trading Rule	Trading Satisfied?
Very High	Bespoke compensation likely to be required ✖	Yes ✓
High	Same habitat required =	Yes ✓
Medium	Same broad habitat or a higher distinctiveness habitat required (≥)	Yes ✓
Low	Same distinctiveness or better habitat required ≥	Yes ✓

Very High Distinctiveness					
Habitat group	Group	On Site Unit Change	Off Site Unit Change	Project wide Unit Change	Unit Losses
Grassland - Lowland dry acid grassland	Grassland	0.00	0.00	0.00	
Grassland - Lowland meadows	Grassland	0.00	0.00	0.00	
Grassland - Upland hay meadows	Grassland	0.00	0.00	0.00	
Heathland and shrub - Mountain heaths and willow scrub	Heathland and shrub	0.00	0.00	0.00	
Lakes - Aquifer fed naturally fluctuating water bodies	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Calaminarian grasslands	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Limestone pavement	Sparsely vegetated land	0.00	0.00	0.00	
Wetland - Blanket bog	Wetland	0.00	0.00	0.00	
Wetland - Depressions on Peat substrates (H7150)	Wetland	0.00	0.00	0.00	
Wetland - Fens (upland and lowland)	Wetland	0.00	0.00	0.00	
Wetland - Lowland raised bog	Wetland	0.00	0.00	0.00	
Wetland - Oceanic Valley Mire[1] (D2.1)	Wetland	0.00	0.00	0.00	
Wetland - Purple moor grass and rush pastures	Wetland	5.16	0.00	5.16	
Wetland - Transition mires and quaking bogs (H7140)	Wetland	0.00	0.00	0.00	
Woodland and forest - Wood-pasture and parkland	Woodland and forest	0.00	0.00	0.00	
Rocky shore - High energy littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Rocky shore - Moderate energy littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Rocky shore - Low energy littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Rocky shore - Features of littoral rock - on peat, clay or chalk	Rocky shore	0.00	0.00	0.00	
Intertidal sediment - Littoral seagrass on peat, clay or chalk	Intertidal sediment	0.00	0.00	0.00	
		5.16	0.00	5.16	0.00

Very High Distinctiveness Summary	
Very High Distinctiveness Units available to offset lower distinctiveness deficit	5.16

High Distinctiveness					
Habitat group	Group	On Site Unit Change	Off Site Unit Change	Project wide Unit Change	Losses not yet accounted for
Grassland - Traditional orchards	Grassland	0.00	0.00	0.00	
Grassland - Floodplain Wetland Mosaic (CFGM)	Grassland	0.00	0.00	0.00	
Grassland - Lowland calcareous grassland	Grassland	227.98	0.00	227.98	
Grassland - Tall herb communities (H6430)	Grassland	0.00	0.00	0.00	
Grassland - Upland calcareous grassland	Grassland	0.00	0.00	0.00	
Heathland and shrub - Lowland Heathland	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Sea buckthorn scrub (Annex 1)	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Upland Heathland	Heathland and shrub	0.00	0.00	0.00	
Lakes - High alkalinity lakes	Lakes	0.00	0.00	0.00	
Lakes - Low alkalinity lakes	Lakes	0.00	0.00	0.00	
Lakes - Marl Lakes	Lakes	0.00	0.00	0.00	
Lakes - Moderate alkalinity lakes	Lakes	0.00	0.00	0.00	
Lakes - Peat Lakes	Lakes	0.00	0.00	0.00	
Lakes - Ponds (Priority Habitat)	Lakes	0.00	0.00	0.00	
Lakes - Temporary lakes, ponds and pools	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Coastal sand dunes	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Coastal vegetated shingle	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Inland rock outcrop and scree habitats	Sparsely vegetated land	0.00	0.00	0.00	
Sparsely vegetated land - Maritime cliff and slopes	Sparsely vegetated land	0.00	0.00	0.00	
Urban - Open Mosaic Habitats on Previously Developed Land	Urban	0.00	0.00	0.00	
Wetland - Reedbeds	Wetland	0.00	0.00	0.00	
Woodland and forest - Felled	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Lowland beech and yew woodland	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Lowland mixed deciduous woodland	Woodland and forest	8.86	0.00	8.86	
Woodland and forest - Native pine woodlands	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Upland birchwoods	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Upland mixed ashwoods	Woodland and forest	0.00	0.00	0.00	

High Distinctiveness Summary	
High Distinctiveness Units available to offset lower distinctiveness deficit	236.84
Unit Defecit; Like for like not satisfied	✔ 0.00

Woodland and forest - Upland oakwood	Woodland and forest	0.00	0.00	0.00	
Woodland and forest - Wet woodland	Woodland and forest	0.00	0.00	0.00	
Coastal lagoons - Coastal lagoons	Coastal lagoons	0.00	0.00	0.00	
Rocky shore - High energy littoral rock	Rocky shore	0.00	0.00	0.00	
Rocky shore - Moderate energy littoral rock	Rocky shore	0.00	0.00	0.00	
Rocky shore - Low energy littoral rock	Rocky shore	0.00	0.00	0.00	
Rocky shore - Features of littoral rock	Rocky shore	0.00	0.00	0.00	
Intertidal sediment - Littoral mud	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral mixed sediments	Intertidal sediment	0.00	0.00	0.00	
Coastal saltmarsh - Saltmarshes and saline reedbeds	Coastal Saltmarsh	0.00	0.00	0.00	
Intertidal sediment - Littoral biogenic reefs - Mussels	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral biogenic reefs - Sabellaria	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Features of littoral sediment	Intertidal sediment	0.00	0.00	0.00	
Intertidal sediment - Littoral muddy sand	Intertidal sediment	0.00	0.00	0.00	
		236.84	0.00	236.84	0.00

Medium Distinctiveness					
Habitat Group	Group	On site unit change	Off Site unit Change	Project wide unit change	Cumulative Broad Habitat Change
Cropland - Arable field margins cultivated annually	Cropland	0.00	0.00	0.00	1.79
Cropland - Arable field margins game bird mix	Cropland	1.79	0.00	1.79	
Cropland - Arable field margins pollen & nectar	Cropland	0.00	0.00	0.00	
Cropland - Arable field margins tussocky	Cropland	0.00	0.00	0.00	
Grassland - Other lowland acid grassland	Grassland	400.56	0.00	400.56	350.04
Grassland - Other neutral grassland	Grassland	-50.52	0.00	-50.52	
Grassland - Upland acid grassland	Grassland	0.00	0.00	0.00	
Heathland and shrub - Blackthorn scrub	Heathland and shrub	0.00	0.00	0.00	2.67
Heathland and shrub - Bramble scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Gorse scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Hawthorn scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Hazel scrub	Heathland and shrub	0.00	0.00	0.00	
Heathland and shrub - Mixed scrub	Heathland and shrub	2.67	0.00	2.67	
Lakes - Ponds (Non- Priority Habitat)	Lakes	0.00	0.00	0.00	0.00
Lakes - Reservoirs	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Other inland rock and scree	Sparsely vegetated land	0.00	0.00	0.00	0.00
Urban - Cemeteries and churchyards	Urban	0.00	0.00	0.00	
Urban - Biodiverse green roof	Urban	0.00	0.00	0.00	
Urban - Urban Tree	Urban	0.00	0.00	0.00	
Woodland and forest - Other Scot's Pine woodland	Woodland and forest	0.00	0.00	0.00	64.24
Woodland and forest - Other woodland; broadleaved	Woodland and forest	64.33	0.00	64.33	
Woodland and forest - Other woodland; mixed	Woodland and forest	-0.09	0.00	-0.09	
Intertidal sediment - Littoral coarse sediment	Intertidal sediment	0.00	0.00	0.00	0.00
Intertidal sediment - Littoral sand	Intertidal sediment	0.00	0.00	0.00	
Intertidal Hard Structures - Artificial hard structures with Integrated Greening of Grey Infrastructure (IGGI)	Intertidal	0.00	0.00	0.00	
		418.74	0.00	418.74	

Medium Distinctiveness Summary	
Medium Distinctiveness Units available to offset lower distinctiveness deficit	418.74
Medium Distinctiveness Broad Habitat Deficit to be offset by trading up	0.00
Higher distinctiveness surplus units minus Medium Distinctivenss Broad Habitat Defecit	242.00
Cumulative surplus of units	660.74

Low Distinctiveness					
Habitat group	Group	On site unit change	Off Site Unit Change	Project wide unit change	
Cropland - Cereal crops	Cropland	-830.71	0.00	-830.71	
Cropland - Horticulture	Cropland	0.00	0.00	0.00	
Cropland - Intensive orchards	Cropland	0.00	0.00	0.00	
Cropland - Non-cereal crops	Cropland	0.00	0.00	0.00	
Cropland - Temporary grass and clover leys	Cropland	0.00	0.00	0.00	
Cropland - Cereal crops winter stubble	Cropland	0.00	0.00	0.00	
Grassland - Modified grassland	Grassland	842.81	0.00	842.81	
Grassland - Bracken	Grassland	0.00	0.00	0.00	
Heathland and shrub - Rhododendron scrub	Heathland and shrub	0.00	0.00	0.00	
Lakes - Ornamental lake or pond	Lakes	0.00	0.00	0.00	
Sparsely vegetated land - Ruderal/Ephemeral	Sparsely vegetated land	71.46	0.00	71.46	
Urban - Bioswale	Sparsely vegetated land	0.00	0.00	0.00	
Urban - Allotments	Urban	0.00	0.00	0.00	

Low Distinctiveness Summary	
Low Distinctiveness Net Change in Units	-163.58
Cumulative surplus of units	497.16

Urban - Facade-bound green wall	Urban	0.00	0.00	0.00
Urban - Ground based green wall	Urban	0.00	0.00	0.00
Urban - Ground level planters	Urban	0.00	0.00	0.00
Urban - Other green roof	Urban	0.00	0.00	0.00
Urban - Intensive green roof	Urban	0.00	0.00	0.00
Urban - Introduced shrub	Urban	0.00	0.00	0.00
Urban - Rain garden	Urban	0.00	0.00	0.00
Urban - Actively worked sand pit quarry or open cast mine	Urban	0.00	0.00	0.00
Urban - Sustainable urban drainage feature	Urban	0.00	0.00	0.00
Urban - Vacant/derelict land/ bareground	Urban	-247.07	0.00	-247.07
Urban - Vegetated garden	Urban	0.00	0.00	0.00
Woodland and forest - Other coniferous woodland	Woodland and forest	-0.07	0.00	-0.07
Coastal saltmarsh - Artificial saltmarshes and saline reedbeds	Coastal saltmarsh	0.00	0.00	0.00
Intertidal sediment - Artificial littoral coarse sediment	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral mud	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral sand	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral muddy sand	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral mixed sediments	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral seagrass	Intertidal sediment	0.00	0.00	0.00
Intertidal sediment - Artificial littoral biogenic reefs	Intertidal sediment	0.00	0.00	0.00
Intertidal Hard Structures - Artificial hard structures	Intertidal	0.00	0.00	0.00
Intertidal Hard Structures - Artificial features of hard structures	Intertidal	0.00	0.00	0.00
Heathland and shrub - Sea buckthorn scrub (other)	Heathland and shrub	0.00	0.00	0.00
		-163.58		-163.58

A-1 Site Habitat Baseline

61	Heathland and shrub	Mixed scrub	0.133914441	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	1.07			0.00	0.00	0.13	1.07		Outside East Cambs NRN and within E02	
62	Heathland and shrub	Mixed scrub	0.024336363	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	0.19	0.024336		0.19	0.00	0.00	0.00		Outside East Cambs NRN and within E03	
63	Heathland and shrub	Mixed scrub	0.005553493	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	0.04			0.00	0.00	0.01	0.04		Outside East Cambs NRN and within E30	
64	Heathland and shrub	Mixed scrub	0.849177586	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	6.79			0.00	0.00	0.85	6.79		Outside East Cambs NRN and within ECO3	
65	Heathland and shrub	Mixed scrub	0.519508404	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	4.16	0.519508		4.16	0.00	0.00	0.00		Outside East Cambs NRN and within Pwr Stn	
66	Grassland	Modified grassland	0.08639144	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	0.17	0.086365		0.17	0.00	0.00	0.00		Outside East Cambs NRN and within Cable Route North	
67	Grassland	Modified grassland	1.008954687	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	2.02	1.008954		2.02	0.00	0.00	0.00		Outside East Cambs NRN and within Cable Route West	
68	Grassland	Modified grassland	1.118356286	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	2.24			0.00	0.00	1.12	2.24		Outside East Cambs NRN and within ECO3	
69	Grassland	Modified grassland	1.578403129	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	3.16	1.576951		3.15	0.00	0.00	0.00		Outside East Cambs NRN and within Fringe habitats and site fabric outside of parcel references	
70	Grassland	Modified grassland	3.584595829	Low	2	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	7.17	3.584597		7.17	0.00	0.00	0.00		Outside East Cambs NRN and within Pwr Stn	
71	Woodland and forest	Other coniferous woodland	0.225404031	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	0.90			0.90	0.00	0.00	0.00		Outside East Cambs NRN and within Cable Route West	
72	Woodland and forest	Other coniferous woodland	0.040133803	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	0.16	0.040134		0.16	0.00	0.00	0.00		Outside East Cambs NRN and within E03	
73	Woodland and forest	Other coniferous woodland	1.375475778	Low	2	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same distinctiveness or better habitat required	5.50	1.358538		5.43	0.00	0.02	0.07		Outside East Cambs NRN and within E30	
74	Grassland	Other lowland acid grassland	1.232513383	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	9.86			0.00	0.00	1.23	9.86		Outside East Cambs NRN and within E13	
75	Grassland	Other lowland acid grassland	4.466835269	Medium	4	Good	3	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	53.84	4.466835		53.84	0.00	0.00	0.00		Outside East Cambs NRN and within ECO3	
76	Grassland	Other neutral grassland	0.831979483	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	3.33	0.831979		3.33	0.00	0.00	0.00		Outside East Cambs NRN and within Cable Route North	
77	Grassland	Other neutral grassland	1.295996772	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	5.18	1.295996		5.18	0.00	0.00	0.00		Outside East Cambs NRN and within Cable Route West	
78	Grassland	Other neutral grassland	0.716431235	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	2.87	0.682137		2.73	0.00	0.03	0.14		Outside East Cambs NRN and within E01	
79	Grassland	Other neutral grassland	2.246989397	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	9.00			0.00	0.00	2.25	9.00		Outside East Cambs NRN and within E02	
80	Grassland	Other neutral grassland	0.583753912	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	2.34			0.00	0.00	0.58	2.34		Outside East Cambs NRN and within E05	
81	Grassland	Other neutral grassland	0.322118407	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	Same broad habitat or a higher distinctiveness habitat required	1.29			0.00	0.0					

[illegible]

A-2 Site Habitat Creation

SUNNICA	
A-2 Site Habitat Creation	
Condense / Show Columns	Condense / Show Rows
Main Menu	Instructions

Urban	Developed land, sealed surface	0.000175917	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Outside East Cambe NRN and within Fringe habitats and site fabric outside of parcel references	
Urban	Developed land, sealed surface	0.012035868	V.Low	0	N/A - Other	0	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	0	0	0	Standard time to target condition applied	0	1.000	Low	Standard difficulty applied	Medium	0.67	0.00	Outside East Cambe NRN and within Fringe habitats and site fabric outside of parcel references	
Cropland	Arable field margins game bird mix	0.184635412	Medium	4	Condition Assessment N/A	1	Location ecologically desirable but not in local strategy	Medium strategic significance	1.1	1	0	0	Standard time to target condition applied	1	0.965	Low	Standard difficulty applied	Low	1	0.78	Outside East Cambe NRN and within E14	
Cropland	Arable field margins game bird mix	0.096125604	Medium	4	Condition Assessment N/A	1	Location ecologically desirable but not in local strategy	Medium strategic significance	1.1	1	0	0	Standard time to target condition applied	1	0.965	Low	Standard difficulty applied	Low	1	0.41	Outside East Cambe NRN and within E17	
Cropland	Arable field margins game bird mix	0.140890458	Medium	4	Condition Assessment N/A	1	Location ecologically desirable but not in local strategy	Medium strategic significance	1.1	1	0	0	Standard time to target condition applied	1	0.965	Low	Standard difficulty applied	Low	1	0.60	Outside East Cambe NRN and within E30	
Grassland	Lowland calcareous grassland	0.851258982	High	6	Good	3	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	20	0	0	Standard time to target condition applied	20	0.490	High	Standard difficulty applied	High	0.33	2.48	Outside East Cambe NRN and within E22	
Grassland	Lowland calcareous grassland	0.943203509	High	6	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	High	Standard difficulty applied	High	0.33	2.62	Outside East Cambe NRN and within E32	
Grassland	Lowland calcareous grassland	34.5485838	High	6	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	High	Standard difficulty applied	High	0.33	95.61	Outside East Cambe NRN and within ECO1	
Grassland	Lowland calcareous grassland	28.56343529	High	6	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	High	Standard difficulty applied	High	0.33	79.29	Outside East Cambe NRN and within ECO2	
Grassland	Lowland calcareous grassland	0.000627837	High	6	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	High	Standard difficulty applied	High	0.33	0.00	Outside East Cambe NRN and within Fringe habitats and site fabric outside of parcel references	
Grassland	Lowland calcareous grassland	0.643548441	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	1.07	Outside East Cambe NRN and within E03	
Grassland	Lowland calcareous grassland	2.609004266	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	4.32	Outside East Cambe NRN and within E04	
Grassland	Lowland calcareous grassland	2.561009812	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	4.24	Outside East Cambe NRN and within E19	
Grassland	Lowland calcareous grassland	0.001069621	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	0.00	Outside East Cambe NRN and within E20	
Grassland	Lowland calcareous grassland	2.294976268	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	3.80	Outside East Cambe NRN and within E21	
Grassland	Lowland calcareous grassland	1.989570904	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	2.63	Outside East Cambe NRN and within E22	
Grassland	Lowland calcareous grassland	0.298092832	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	0.49	Outside East Cambe NRN and within E24	
Grassland	Lowland calcareous grassland	1.347936345	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	2.23	Outside East Cambe NRN and within E24	
Grassland	Lowland calcareous grassland	0.608200249	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	1.01	Outside East Cambe NRN and within E25	
Grassland	Lowland calcareous grassland	1.133972211	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	High	Standard difficulty applied	High	0.33	1.88	Outside East Cambe NRN and within E25	
Grassland	Lowland calcareous grassland	1.390876901	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance														

[illegible]

Grassland	Other neutral grassland	2.19228409	Medium	4	Good	3	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	18.42	Outside East Cambe NNN and within E01	
Grassland	Other neutral grassland	3.018525327	Medium	4	Good	3	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	8.56	Outside East Cambe NNN and within E02	
Grassland	Other neutral grassland	1.431340299	Medium	4	Good	3	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	12.03	Outside East Cambe NNN and within E05	
Grassland	Other neutral grassland	4.236535109	Medium	4	Good	3	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	35.60	Outside East Cambe NNN and within E05	
Grassland	Other neutral grassland	7.532821492	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	50.43	Outside East Cambe NNN and within E05	
Grassland	Other neutral grassland	0.294918274	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	1.97	Outside East Cambe NNN and within E09	
Grassland	Other neutral grassland	0.002740969	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.02	Outside East Cambe NNN and within E10	
Grassland	Other neutral grassland	0.188033815	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	1.28	Outside East Cambe NNN and within E31	
Grassland	Other neutral grassland	2.779919325	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	5	0	0	Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	18.61	Outside East Cambe NNN and within E33	
Grassland	Other neutral grassland	7.31583505	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	2	0	0	Standard time to target condition applied	2	0.931	Low	Standard difficulty applied	Low	1	0.00	Outside East Cambe NNN and within E01	
Grassland	Other neutral grassland	0.124567227	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	2	0	0	Standard time to target condition applied	2	0.931	Low	Standard difficulty applied	Low	1	0.46	Outside East Cambe NNN and within E02	
Grassland	Other neutral grassland	0.229416439	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	2	0	0	Standard time to target condition applied	2	0.931	Low	Standard difficulty applied	Low	1	0.85	Outside East Cambe NNN and within E03	
Grassland	Other neutral grassland	0.446509947	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	2	0	0	Standard time to target condition applied	2	0.931	Low	Standard difficulty applied	Low	1	1.66	Outside East Cambe NNN and within E04	
Grassland	Other neutral grassland	0.044426561	Medium	4	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	2	0	0	Standard time to target condition applied	2	0.931	Low	Standard difficulty applied	Low	1	0.17	Outside East Cambe NNN and within E33	
Woodland and forest	Other woodland; broadleaved	0.607544148	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	15	0	0	Standard time to target condition applied	15	0.586	Low	Standard difficulty applied	Low	1	2.85	Outside East Cambe NNN and within E02	
Woodland and forest	Other woodland; broadleaved	0.541807711	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	15	0	0	Standard time to target condition applied	15	0.586	Low	Standard difficulty applied	Low	1	2.54	Outside East Cambe NNN and within E03	
Woodland and forest	Other woodland; broadleaved	1.843588022	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	15	0	0	Standard time to target condition applied	15	0.586	Low	Standard difficulty applied	Low	1	8.64	Outside East Cambe NNN and within E04	
Woodland and forest	Lowland mixed deciduous woodland	7.033819612	High	6	Poor	1	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	10	0	0	Standard time to target condition applied	10	0.700	High	Standard difficulty applied	High	0.33	9.75	Outside East Cambe NNN and within E05	
Woodland and forest	Other woodland; broadleaved	0.172782697	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	15	0	0	Standard time to target condition applied	15	0.586	Low	Standard difficulty applied	Low	1	0.81	Outside East Cambe NNN and within E08	
Woodland and forest	Other woodland; broadleaved	0.808373377	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	15	0	0	Standard time to target condition applied	15	0.586	Low	Standard difficulty applied	Low	1	3.79	Outside East Cambe NNN and within E09	
Woodland and forest	Other woodland; broadleaved	0.15381978	Medium	4	Moderate	2	Area/compensation not in local strategy/ no local strategy	Low Strategic Significance	1	15	0	0	Standard time to target condition applied	15	0.586	Low	Standard difficulty applied	Low	1	0.72	Outside East	

A-3 Site Habitat Enhancement

[illegible]

Metric 3 Hedgerows and Trees

Headline Results

SUNNICA

Headline Results

Return to
results menu

On-site baseline

Habitat units

6.80

Hedgerow units

153.57

River units

0.00

On-site post-intervention

(Including habitat retention, creation & enhancement)

Habitat units

11.07

Hedgerow units

196.71

River units

0.00

On-site net % change

(Including habitat retention, creation & enhancement)

Habitat units

62.84%

Hedgerow units

28.09%

River units

0.00%

Off-site baseline

Habitat units

0.00

Hedgerow units

0.00

River units

0.00

Off-site post-intervention

(Including habitat retention, creation & enhancement)

Habitat units

0.00

Hedgerow units

0.00

River units

0.00

Total net unit change

(including all on-site & off-site habitat retention, creation & enhancement)

Habitat units

4.27

Hedgerow units

43.14

River units

0.00

Total on-site net % change plus off-site surplus

(including all on-site & off-site habitat retention, creation & enhancement)

Habitat units

62.84%

Hedgerow units

28.09%

River units

0.00%

Trading rules Satisfied?

Yes ✓

A-1 Site Habitat Baseline

[illegible]

[illegible]

Total area lost (excluding area of Urban trees and Green walls)	0.00
---	------

A-2 Site Habitat Creation

B-1 Site Hedge Baseline

B-1 Site Hedge Baseline													
Condense / Show Columns													
Condense / Show Rows													
Main Menu													
Instructions													
Baseline ref	UK Habitats - existing habitats			Habitat distinctiveness		Habitat condition		Strategic significance			Suggested action to address habitat losses	Ecological baseline Total hedgerow units	
	Hedge number	Hedgerow type	Length (km)	Distinctiveness	Score	Condition	Score	Strategic significance	Strategic significance	Strategic position multiplier			
1		Line of trees	0.20196972	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.89	
2		Line of trees	0.19687752	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.87	
3		Line of trees	0.61102206	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.69	
4		Line of trees	0.61032821	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.69	
5		Line of trees	0.18269858	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.80	
6		Line of trees	0.97319549	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	4.28	
7		Line of trees	0.52063392	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.29	
8		Line of trees	0.3353238	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.48	
9		Line of trees	0.92869238	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	4.09	
10		Line of trees	0.58927379	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	2.71	
11		Line of Trees - Associated with bank or ditch	0.04044522	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.18	
12		Native hedgerow	1.05135929	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	4.63	
13		Native hedgerow	0.32323459	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.42	
14		Native hedgerow	0.46189555	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.03	
15		Native hedgerow	0.15310075	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.67	
16		Native hedgerow	0.39158087	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.72	
17		Native hedgerow	0.59188982	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.80	
18		Native hedgerow	0.24464822	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.08	
19		Native hedgerow	0.39783868	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.75	
20		Native hedgerow	0.64525048	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.84	
21		Native hedgerow	0.85450458	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	3.76	
22		Native hedgerow	0.52737099	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.32	
23		Native hedgerow	0.02786357	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.12	
24		Native hedgerow	0.52605472	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.31	
25		Native hedgerow	0.19736641	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.87	
26		Native hedgerow	0.31749529	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.40	
27		Native hedgerow	0.45147887	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.99	
28		Native hedgerow	0.24112206	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.06	
29		Native hedgerow	0.57146318	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.51	
30		Native hedgerow	0.26125204	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.15	
31		Native hedgerow	0.01777951	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.08	
32		Native hedgerow	0.44638012	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.96	
33		Native hedgerow	0.62822476	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	2.76	
34		Native hedgerow	0.16117448	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.71	
35		Native hedgerow	0.83253939	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	3.66	
36		Native hedgerow	0.25570334	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	1.13	
37		Native hedgerow	0.73348538	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	3.23	
38		Native hedgerow	0.06092301	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.27	
39		Native hedgerow	0.08722886	Low	2	Poor	1	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.19	
40		Native hedgerow	0.35189541	Low	2	Poor	1	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.77	
41		Native hedgerow	0.13924187	Low	2	Poor	1	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.31	
42		Native hedgerow	0.43396733	Low	2	Poor	1	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Same distinctiveness band or better	0.95	
43		Native hedgerow	0.70971482	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	3.26	
44		Native hedgerow	0.11554976	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	0.53	
45		Native hedgerow	0.43978967	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	2.02	
46		Native hedgerow	0.36183305	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	1.66	
47		Native hedgerow	0.08383247	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	0.39	
48		Native hedgerow	0.69597478	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	3.20	
49		Native hedgerow	0.7116461	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	3.27	
50		Native hedgerow	0.28828099	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	1.33	
51		Native hedgerow	0.14210222	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	0.65	
Retention category biodiversity value													
Length retained	Length enhanced	Units retained	Units enhanced	Length lost	Units lost	Comments							
Assessor comments						Reviewer comments							
0.201969718		0.89	0.00	0.00	0.00	Outside East Cambs NRN and within Cable Route North							
0.196877521		0.87	0.00	0.00	0.00	Outside East Cambs NRN and within E14							
0.571022009		2.51	0.00	0.04	0.18	Outside East Cambs NRN and within E15							
0.599702772		2.64	0.00	0.01	0.05	Outside East Cambs NRN and within E16							
0.179299597		0.79	0.00	0.00	0.01	Outside East Cambs NRN and within E17							
0.952981242		4.19	0.00	0.02	0.09	Outside East Cambs NRN and within E18							
0.50063389		2.20	0.00	0.02	0.09	Outside East Cambs NRN and within E20							
0.315272928		1.39	0.00	0.02	0.09	Outside East Cambs NRN and within E21							
0.928692383		4.09	0.00	0.00	0.00	Outside East Cambs NRN and within ECO3							
0.464962395		2.14	0.00	0.12	0.57	Within East Cambs NRN and Cable Route West							
0.040445215		0.18	0.00	0.00	0.00	Outside East Cambs NRN and within Cable Route West							
0.949829899		4.18	0.00	0.10	0.45	Outside East Cambs NRN and within Cable Route North							
0.263234575		1.16	0.00	0.06	0.26	Outside East Cambs NRN and within Cable Route West							
0.422804433		1.86	0.00	0.04	0.17	Outside East Cambs NRN and within E03							
0.153100745		0.67	0.00	0.00	0.00	Outside East Cambs NRN and within E08							
0.391580872		1.72	0.00	0.00	0.00	Outside East Cambs NRN and within E09							
0.545989875		2.40	0.00	0.05	0.20	Outside East Cambs NRN and within E10							
		0.00	0.00	0.24	1.08	Outside East Cambs NRN and within E12							
0.397838679		1.75	0.00	0.00	0.00	Outside East Cambs NRN and within E16							
0.609294794		2.68	0.00	0.04	0.16	Outside East Cambs NRN and within E18							
0.851940393		3.75	0.00	0.00	0.01	Outside East Cambs NRN and within E19							
0.522596316		2.30	0.00	0.00	0.02	Outside East Cambs NRN and within E20							
0.027863567		0.12	0.00	0.00	0.00	Outside East Cambs NRN and within E21							
0.496054695		2.18	0.00	0.03	0.13	Outside East Cambs NRN and within E22							
0.169342185		0.75	0.00	0.03	0.12	Outside East Cambs NRN and within E24							
0.288897374		1.27	0.00	0.03	0.13	Outside East Cambs NRN and within E25							
0.4243672		1.87	0.00	0.03	0.12	Outside East Cambs NRN and within E26							
0.221122047		0.97	0.00	0.02	0.09	Outside East Cambs NRN and within E27							
0.555691217		2.45	0.00	0.02	0.07	Outside East Cambs NRN and within E28							
0.241283831		1.06	0.00	0.02	0.09	Outside East Cambs NRN and within E29							
0.017779506		0.08	0.00	0.00	0.00	Outside East Cambs NRN and within E30							
0.439293828		1.93	0.00	0.01	0.03	Outside East Cambs NRN and within E31							
0.51847372		2.27	0.00	0.11	0.49	Outside East Cambs NRN and within E32							
0.158606542		0.70	0.00	0.00	0.01	Outside East Cambs NRN and within E33							
0.832539388		3.66	0.00	0.00	0.00	Outside East Cambs NRN and within ECO1							
0.255703344		1.13	0.00	0.00	0.00	Outside East Cambs NRN and within ECO2							
0.725661428		3.19	0.00	0.01	0.03	Outside East Cambs NRN and within ECO3							
0.060923006		0.27	0.00	0.00	0.00	Outside East Cambs NRN and within Fringe habitats and site fabric outside of parcel references							
0.087228859		0.19	0.00	0.00	0.00	Outside East Cambs NRN and within Cable Route West							
0.351895405		0.77	0.00	0.00	0.00	Outside East Cambs NRN and within E05							
0.139241866		0.31	0.00	0.00	0.00	Outside East Cambs NRN and within ECO1							
0.433967326		0.95	0.00	0.00	0.00	Outside East Cambs NRN and within ECO2							
0.617512157		2.84	0.00	0.09	0.42	Within East Cambs NRN and Cable Route East							
0.060313244		0.28	0.00	0.06	0.25	Within East Cambs NRN and Cable Route West							
0.439789665		2.02	0.00	0.00	0.00	Within East Cambs NRN and EC05							
0.331747671		1.53	0.00	0.03	0.14	Within East Cambs NRN and W03							
0.079852873		0.37	0.00	0.00	0.02	Within East Cambs NRN and W04							
0.695974779		3.20	0.00	0.00	0.00	Within East Cambs NRN and W05							
0.691646133		3.18	0.00	0.02	0.09	Within East Cambs NRN and W06							
0.288280992		1.33	0.00	0.00	0.00	Within East Cambs NRN and W07							
0.117950296		0.54	0.00	0.02	0.11	Within East Cambs NRN and W08							

52	Native hedgerow	0.81750168	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	3.76	0.751849063		3.46	0.00	0.07	0.30	Within East Cambs NRN and W09	
53	Native hedgerow	0.49932649	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	2.30	0.494718888		2.28	0.00	0.00	0.02	Within East Cambs NRN and W10	
54	Native hedgerow	0.80470405	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	3.70	0.736213889		3.39	0.00	0.07	0.32	Within East Cambs NRN and W11	
55	Native hedgerow	0.89086119	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	4.10	0.777229107		3.58	0.00	0.11	0.52	Within East Cambs NRN and W12	
56	Native hedgerow	0.01278664	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	0.06	0.012786639		0.06	0.00	0.00	0.00	Within East Cambs NRN and W15	
57	Native hedgerow	0.74077226	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	3.41	0.739441581		3.40	0.00	0.00	0.01	Within East Cambs NRN and W17	
58	Native hedgerow	0.43650313	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	2.01	0.406503154		1.87	0.00	0.03	0.14	Within East Cambs NRN and Fringe habitats and site fabric outside of parcel references	
59	Native hedgerow	0.7340401	Low	2	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	1.69	0.734040104		1.69	0.00	0.00	0.00	Within East Cambs NRN and W05	
60	Native hedgerow	0.18132496	Low	2	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	0.42	0.181324957		0.42	0.00	0.00	0.00	Within East Cambs NRN and W07	
61	Native hedgerow	0.36217183	Low	2	Poor	1	Formally identified in local strategy	High strategic significance	1.15	Same distinctiveness band or better	0.83	0.362171831		0.83	0.00	0.00	0.00	Within East Cambs NRN and W09	
62	Native Hedgerow with trees	0.01119491	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	0.10	0.011194906		0.10	0.00	0.00	0.00	Outside East Cambs NRN and within Cable Route West	
63	Native Hedgerow with trees	0.17121095	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	1.51	0.168139805		1.48	0.00	0.00	0.03	Outside East Cambs NRN and within E08	
64	Native Hedgerow with trees	0.05409188	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	0.48	0.054091883		0.48	0.00	0.00	0.00	Outside East Cambs NRN and within E10	
65	Native Hedgerow with trees	0.2418108	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	2.13	0.241810797		2.13	0.00	0.00	0.00	Outside East Cambs NRN and within E24	
66	Native Hedgerow with trees	0.25215064	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	2.22	0.252150644		2.22	0.00	0.00	0.00	Outside East Cambs NRN and within E25	
67	Native Hedgerow with trees	0.4448063	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	3.91	0.444806302		3.91	0.00	0.00	0.00	Outside East Cambs NRN and within ECO1	
68	Native Hedgerow with trees	0.31921712	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	2.81	0.319217115		2.81	0.00	0.00	0.00	Outside East Cambs NRN and within ECO3	
69	Native Hedgerow with trees	0.16188156	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	1.42	0.161881563		1.42	0.00	0.00	0.00	Outside East Cambs NRN and within Pwr Stn	
70	Native Hedgerow with trees	0.50889703	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	Take for like or better	4.48	0.508897027		4.48	0.00	0.00	0.00	Outside East Cambs NRN and within Fringe habitats and site fabric outside of parcel references	
71	Native Hedgerow with trees	0.1157801	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Take for like or better	1.07	0.08678014		0.79	0.00	0.03	0.28	Within East Cambs NRN and Cable Route East	
72	Native Hedgerow with trees	0.16185943	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Take for like or better	1.49	0.16185943		1.49	0.00	0.00	0.00	Within East Cambs NRN and Cable Route West	
73	Native Hedgerow with trees	0.15343405	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	Take for like or better	1.41	0.153434052		1.41	0.00	0.00	0.00	Within East Cambs NRN and W15	
74	Native Hedgerow with trees - Associated with bank or ditch																		

[illegible]

B-2 Site Hedge Creation

B-2 Site Hedge Creation

[Main Menu](#)

Instructions

		Proposed habitats		Habitat distinctiveness		Habitat condition		Strategic significance			Temporal multiplier						Difficulty risk multipliers				Hedge units delivered	Comments	
Baseline ref	New hedge number	Habitat type	Length (km)	Distinctiveness	Score	Condition	Score	Strategic significance	Strategic significance	Strategic position multiplier	Standard Time to target condition/years	Habitat created in advance/years	Delay in starting habitat creation/years	Standard or adjusted time to target condition	Final time to target condition/years	Final time to target multiplier	Standard difficulty of creation	Applied difficulty multiplier	Final difficulty of creation	Difficulty multiplier applied		Assessor comments	Reviewer comments
1		Native hedgerow	0.0755352	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.29	Within East Cambs NRN and Cable Route East	
2		Native hedgerow	0.0352365	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.14	Within East Cambs NRN and Cable Route West	
3		Native hedgerow	0.0300755	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.12	Within East Cambs NRN and W03	
4		Native hedgerow	0.0252076	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.10	Within East Cambs NRN and W11	
5		Native hedgerow	0.03	Low	2	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.12	Within East Cambs NRN and Fringe habitats and site fabric outside of parcel references	
6		Native hedgerow	0.0899536	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.33	Outside East Cambs NRN and within Cable Route North	
7		Native hedgerow	0.06	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.22	Outside East Cambs NRN and within Cable Route West	
8		Native hedgerow	0.03	Low	2	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.11	Outside East Cambs NRN and within E22	
9		Native Hedgerow with trees	0.03	Medium	4	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10			Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	0.19	Within East Cambs NRN and Cable Route East	
10		Native Hedgerow with trees - Associated with bank or ditch	0.0298645	High	6	Moderate	2	Formally identified in local strategy	High strategic significance	1.15	10			Standard time to target condition applied	10	0.700	Low	Standard difficulty applied	Low	1	0.29	Within East Cambs NRN and Cable Route West	
11		Native Hedgerow - Associated with bank or ditch	0.0600012	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.44	Outside East Cambs NRN and within Cable Route West	
12		Native Hedgerow - Associated with bank or ditch	0.03	Medium	4	Moderate	2	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	5			Standard time to target condition applied	5	0.837	Low	Standard difficulty applied	Low	1	0.22	Outside East Cambs NRN and within Pwr Stn	
13		Native Species Rich Hedgerow	0.7302957	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	6.57	Within East Cambs NRN and ECO5	
14		Native Species Rich Hedgerow	0.5371998	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	4.83	Within East Cambs NRN and W09	
15		Native Species Rich Hedgerow	0.1621245	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	1.46	Within East Cambs NRN and W10	
16		Native Species Rich Hedgerow	0.328438	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	2.96	Within East Cambs NRN and W11	
17		Native Species Rich Hedgerow	0.8660109	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	7.79	Within East Cambs NRN and W12	
18		Native Species Rich Hedgerow	0.8415368	Medium	4	Good	3	Formally identified in local strategy	High strategic significance	1.15	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	7.57	Within East Cambs NRN and W15	
19		Native Species Rich Hedgerow	0.3842359	Medium	4	Good	3	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1	3.31	Outside East Cambs NRN and within E08	
20		Native Species Rich Hedgerow	0.6272493	Medium	4	Good	3	Location ecologically desirable but not in local strate	Medium strategic significance	1.1	12			Standard time to target condition applied	12	0.652	Low	Standard difficulty applied	Low	1			

[illegible]

[illegible]

Metric 4 Rivers

Headline Results

On-site baseline	Habitat units	0.00
	Hedgerow units	0.00
	River units	18.71
On-site post-intervention (Including habitat retention, creation & enhancement)	Habitat units	0.00
	Hedgerow units	0.00
	River units	20.83
On-site net % change (Including habitat retention, creation & enhancement)	Habitat units	0.00%
	Hedgerow units	0.00%
	River units	11.37%
Off-site baseline	Habitat units	0.00
	Hedgerow units	0.00
	River units	0.00
Off-site post-intervention (Including habitat retention, creation & enhancement)	Habitat units	0.00
	Hedgerow units	0.00
	River units	0.00
Total net unit change (including all on-site & off-site habitat retention, creation & enhancement)	Habitat units	0.00
	Hedgerow units	0.00
	River units	2.13
Total on-site net % change plus off-site surplus (including all on-site & off-site habitat retention, creation & enhancement)	Habitat units	0.00%
	Hedgerow units	0.00%
	River units	11.37%
Trading rules Satisfied?	Yes ✓	

A-1 Site Habitat Baseline

SUNNICA
A-1 Site Habitat Baseline

Condense / Show Columns

Condense / Show Rows

[Main Menu](#)

Instructions

[illegible]

[illegible]

A-2 Site Habitat Creation

B-1 Site Hedge Baseline

B-1 Site Hedge Baseline

[Main Menu](#)

Instructions

[illegible]

[illegible]

223																			
224																			
225																			
226																			
227																			
228																			
229																			
230																			
231																			
232																			
233																			
234																			
235																			
236																			
237																			
238																			
239																			
240																			
241																			
242																			
243																			
244																			
245																			
246																			
247																			
248																			
			0.00									0.00							
													0.00	0.00	0.00	0.00	0.00	0.00	

B-2 Site Hedge Creation

B-2 Site Hedge Creation

[Main Menu](#)

Instructions

[illegible]

[illegible]

C-1 Site River Baseline

C-1 Site River Baseline

Condense / Show Rows

[Main Menu](#)

Instructions

Existing river type			Habitat distinctiveness		Habitat condition		Strategic significance			Watercourse encroachment		Riparian encroachment		Suggested action	Ecological baseline	Retention category biodiversity value						Comments	
Baseline ref	River type	Length (km)	Distinctiveness	Score	Condition	Score	Strategic significance	Strategic significance	Strategic significance multiplier	Extent of encroachment	Multiplier	Extent of encroachment	Multiplier		Total river units	Length retained	Length enhanced	Units retained	Units enhanced	Length Lost	Units Lost	Assessor Comments	Reviewer comments
1	Ditches	0.09	Medium	4	Poor	1	Low potential/action not identified in any plan	Low Strategic Significance	1	No Encroachment	1	No Encroachment	1	Restore	0.36	0.07	0.02	0.28	0.08	0.00	0.00	Intrusive crossing of tributary drain to River Snail (WT) - assuming no impact as the habitat will be restored within 2 years, assuming best case scenario of 10m being enhanced both upstream and downstream of the works	
2	Culvert	0.006	Low	2	Poor	1	Low potential/action not identified in any plan	Low Strategic Significance	1	N/A - Culvert	1	No Encroachment	1	Restore	0.01	0.006	0	0.01	0.00	0.00	0.00	Intrusive crossing of tributary drain to River Snail (WT) - existing culvert under track from one field to another	
3	Ditches	0.058	Medium	4	Poor	1	Low potential/action not identified in any plan	Low Strategic Significance	1	No Encroachment	1	No Encroachment	1	Restore	0.23	0.038	0.02	0.15	0.08	0.00	0.00	Intrusive crossing of drain in the New River catchment (W13) - assuming no impact as the habitat will be restored within 2 years, assuming best case scenario of 10m being enhanced both upstream and downstream of the works	
4	Culvert	0.008	Low	2	Poor	1	Low potential/action not identified in any plan	Low Strategic Significance	1	N/A - Culvert	1	No Encroachment	1	Restore	0.02	0.008	0	0.02	0.00	0.00	0.00	Intrusive crossing of drain in the New River catchment (W13) - existing culvert under track	
5	Ditches	0.382	Medium	4	Moderate	2	Low potential/action not identified in any plan	Low Strategic Significance	1	No Encroachment	1	No Encroachment	1	Restore	3.06	0.355	0.02	2.84	0.16	0.01	0.06	New Culvert - Trib of Lark - minus 7m for the creation of a new culvert	
6	Culvert	0.011	Low	2	Poor	1	Low potential/action not identified in any plan	Low Strategic Significance	1	N/A - Culvert	1	No Encroachment	1	Restore	0.02	0.011	0	0.02	0.00	0.00	0.00	Culvert - Trib of Lark - existing culvert under track from one field to another	
7	Priority Habitat	1.414	V.High	6	Moderate	2	Within River Basin Management Plan	High Strategic Significance	1.15	Major	0.5	No Encroachment	1	Restore	13.01	0	1.414	0.00	13.01	0.00	0.00	watercourse encroachment from weir at TL 66245 73255	
8	Ditches	0.5	Medium	4	Poor	1	Low potential/action not identified in any plan	Low Strategic Significance	1	No Encroachment	1	No Encroachment	1	Restore	2.00	0.5	0	2.00	0.00	0.00	0.00	Ditch 2 (adjacent to Kennett-Lee Brook). Unlikely that enhancement will be possible here due to the nature of the ditch	
9																							
10																							
11																							
12																							
13																							
14																							
15																							
16																							
17																							
18																							
19																							
20																							
21																							
22																							
23																							
24																							
25																							
26																							
27																							
28																							
29																							
30																							

[illegible]

234																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

C-2 Site River Creation

C-2 Site River Creation

[Main Menu](#)

instructions

[illegible]

[illegible]

C-3 Site River Enhancement

[illegible]