



Botley West Solar Farm

Outline Landscape and Ecology Management Plan

July 2026

PINS Ref: EN010147

Document Ref: EN010147/APP/7.6.3

Revision 9

APFP Regulation 5(2)(q); Planning Act 2008; and Infrastructure Planning (Applications: Prescribed Forms and Procedure) Regulations

Approval for issue

Amy Robinson

16 July 2026

This report was prepared by Tetra Tech within the terms of Tetra Tech engagement with its client and in direct response to a scope of services. This report is supplied for the sole and specific purpose for use by Tetra Tech's client. The report does not account for any changes relating the subject matter of the report, or any legislative or regulatory changes that have occurred since the report was produced and that may affect the report. Tetra Tech does not accept any responsibility or liability for loss whatsoever to any third party caused by, related to or arising out of any use or reliance on the report.

Prepared by:

RPS
101 Park Drive,
Milton Park, Abingdon,
Oxfordshire, OX14 4RY
United Kingdom

Prepared for:

Photovolt Development Partners GmbH,
on behalf of SolarFive Ltd.

Contents

1	INTRODUCTION	1
1.1	Purpose and scope	1
1.2	Site Description	3
1.3	Responsibilities for Management	4
2	LANDSCAPE DESIGN OBJECTIVES AND MANAGEMENT AIMS	5
2.1	Landscape Design Objectives	5
2.2	Management Aims	5
3	LANDSCAPE ELEMENTS	6
3.2	Soft Landscape Elements	6
3.3	Hard Landscape Elements	7
4	LANDSCAPE AND ECOLOGY ZONE OBJECTIVES	8
4.2	Zone 1: Northern Estate Farmlands	8
4.3	Zone 2: Evenlode Corridor	8
4.4	Zone 3: Valley Farmland	9
4.5	Zone 4: Wooded Estate Farmland	10
4.6	Zone 5: Southern Area	11
5	LANDSCAPE ZONE PROPOSALS	12
5.2	Zone 1: Northern Estate Farmland	13
5.3	Zone 2: Evenlode Corridor	13
5.4	Zone 3: Valley Farmland	14
5.5	Zone 4: Wooded Estate Farmland	15
5.6	Zone 5: Southern Area	15
6	PUBLIC HEALTH ELEMENTS	17
7	ECOLOGY STRATEGY	18
7.1	Ecology Baseline	18
7.2	Ecology Strategy	19
7.3	Tree Surveys	21
8	ECOLOGY MITIGATION MEASURES	22
8.2	Habitats	22
8.3	Great Crested Newt	23
8.4	Badgers	23
8.5	Bats	24
8.6	Dormouse	25
8.7	Breeding birds	25
8.8	Reptiles	26
8.9	Invertebrates	26
9	BIODIVERSITY NET GAIN	28
10	BIODIVERSITY OBJECTIVES AND TARGETS	29
10.1	Biodiversity Aims	29
10.2	Biodiversity Objectives	29
11	OUTLINE HABITAT MANAGEMENT	32
11.1	Grassland	32
11.2	Woodlands	33
11.3	Hedgerows	34
11.4	Scrapes	35
11.5	Great Crested Newts	36

11.6	Breeding Birds.....	36
11.7	Skylark plots.....	36
11.8	Bats	37
11.9	Invertebrates	37
12	MONITORING PROCEDURE.....	38
12.1	Introduction	38
12.2	Grassland Monitoring	38
12.3	Ditches	38
12.4	Other Broadleaved Woodland.....	39
12.5	Scattered Trees.....	39
12.6	Hedgerows	39
12.7	Ponds	39
12.8	Great Crested Newt	40
12.9	Badger.....	40
12.10	Dormice	40
12.11	Wintering and Breeding Birds	40
12.12	Bats	41
12.13	Invertebrates	41
12.14	Control of invasive species	42
13	MONITORING PROGRAMME.....	43
14	WORKMANSHIP.....	44
15	RESPONSIBILITIES FOR MANAGEMENT AND TIMESCALES.....	45
16	SCHEDULE OF MAINTENANCE.....	46
16.2	Native Woodland and Buffer Planting	46
16.3	Individual and Hedgerow Trees	46
16.4	Meadow Grass	46
16.5	General.....	47
17	MANAGEMENT REVIEWS AND ACTIONS	50
	REFERENCES	52

Tables

Table 11.1	Grassland Management Specifications	32
Table 13.1:	Programme of Habitat and Species Monitoring	43
Table 17.1:	Example of Modifications to Management and Remedial Measures.....	50

Drawings

Figure 7.6.3.1	Landscape Management Zoning Plan
Figure 7.6.3.2	A-M Indicative greenway plans
Figure 7.6.3.3	Indicative location of proposed greenways
Figure 8.1	Location of Tier A buffers

Appendices

Appendix A	Species Specific Enhancements Specifications
Appendix B	Typical Planting Schedule

Appendix C Typical Maintenance Schedule

Appendix D : Outline Landscape and Ecology Management Plan Supplement - Design Response to local landscape character.

1 INTRODUCTION

1.1 Purpose and scope

- 1.1.1 This document provides the outline Landscape and Ecology Management Plan (oLEMP) for the Project, prepared on behalf of SolarFive Ltd (the Applicant) for the proposal to construct the Botley West Solar Farm (referred to within this report as ‘the Project’).
- 1.1.2 This revision of the oLEMP provides an update to the Landscape Management Zoning Plan in response to the proposed changes as set out in the Applicant’s Change Request Report [EN010147/APP/16.2]. This revision of the oLEMP provides further detail and should be read in conjunction with the design proposals, set out on the Landscape, Ecology and Amenities Plan [CR2-043].
- 1.1.3 The obligations within this document are secured through a requirement in the Draft DCO [EN010147/APP/3.1] as updated at this Deadline 3 in that prior to commencement of any part of the authorised development, a Landscape and Ecology Management Plan (LEMP) must be submitted to and approved by the relevant Local Authority, either West Oxfordshire (WODC), Cherwell (CDC) or Vale of White Horse Districts (VWHDC), in consultation with Natural England and other relevant stakeholders. The LEMPs must be substantially in accordance with this oLEMP. Including details shown on the Landscape, Ecology and Amenities Plan [CR2-043].
- 1.1.4 It is anticipated that LEMPs will be prepared for collective or individual elements of the Project to align with the delivery programme.
- 1.1.5 This oLEMP sets the overarching vision for the Project and the principles to be consistent across the LEMPs to deliver coherent landscape and ecological features and management across the Project.
- 1.1.6 Each LEMP will include the following for the relevant area (being the area subject to the detailed LEMP):
- The landscape and ecology works for that area in compliance with the objectives and principles of the relevant area as described in this oLEMP;
 - Proposed fences, walls and barriers;
 - Retained and proposed green infrastructure, including planting species, quantities, and their proposed locations;
 - An explanation of how the LEMP contributes to the achievement of biodiversity net gain across the authorised development (see sections 8 and 9 for further detail), calculated using The Statutory Biodiversity Metric (or the current version of the metric if this has been superseded when the plan is submitted for approval); and
 - The required monitoring and management arrangements, and the associated timetable and duration.
- 1.1.7 Landscape and ecology elements, and their management, are intrinsically linked. As such, this report includes input from both landscape and ecology

professionals to ensure the management meets the required aims and objectives intended following the related survey work, and the design and habitat provision intentions. Expectedly there is some overlap and repetition within the guidance provided.

- 1.1.8 This report details the biodiversity and landscape aims and objectives for the habitats of the Site during the operation of the solar farm. It sets out the proposed management actions / specifications which are designed to achieve these objectives. The report also details the monitoring programme and targets which will assess the outcomes of initial habitat creation and ongoing management. It also provides a typical maintenance schedule within Appendix C.
- 1.1.9 This report outlines the various soft landscape zones and elements which form part of the existing landscape, and which will be augmented and, in places, enhanced as part of the Project, and details necessary actions required for their ongoing maintenance and management. The full extent of the Project is described in ES Chapter 6 Project Description **[APP-043]**.
- 1.1.10 This document provides details of:
- The environmental objectives which will be followed in the delivery of the detailed landscape and ecology management plan (see Section 2);
 - The Landscape Elements (Section 3);
 - The overarching landscape strategy describing the existing landscape features of each 'zone' of the Project site and the objectives for the detailed design of the landscape and ecology management plan relevant to each 'zone' (see Section 4);
 - Landscape proposals and principles which are specific to each zone and particular development features (section 5)
 - the overarching ecological strategy for the site, including how impacts to ecology will be managed during implementation and maintenance phases (section 6)
 - Ecology mitigation measures (section 7).
 - Biodiversity Net Gain (section 8);
 - Biodiversity Objectives and Targets (section 9)
 - Outline habitat management principles that will be implemented post practical completion of all soft landscape areas to ensure the effective long-term management of the scheme (section 10).
 - The long-term monitoring of habitats and their biodiversity value will specifically assess the extent to which the management actions are achieving the defined objectives (section 11);
 - Outline monitoring programme to be undertaken in Years 1, 2, 4, 6 and 10, followed by once every 5 years for the lifetime of the Project (section 12);
 - the principles of workmanship which will deliver the works described in the detailed LEMPs (section 13);

- the approach to responsibilities for delivering the works (section 14);
- a description of the maintenance principles that will be implemented post practical completion of all soft landscape areas to ensure the effective long-term management of the scheme (section 15);
- Management review and actions (section 16).

- 1.1.11 This outline Landscape and Ecology Management Plan has been produced with reference to a number of plans and documents, which are described within the relevant sections, including:
- Landscape, Ecology and Amenities Plan (ES Volume 2, Figure 7.3.3, Sheets 1 to 3) **[CR2-043]**
 - Landscape Management Zoning Plan, which illustrates the 5 distinctive character zones of the Project and how they will be managed (Figure 7.6.3.1); and
 - Indicative location of proposed greenways (Figure 7.6.3.3 of this document).
- 1.1.12 Monitoring will inform future management decisions, confirming where the specific target habitat conditions are being achieved and identifying if there are shortfalls to be addressed through remedial actions or modifications to management. This process of habitat management for biodiversity, supported by monitoring, is a long-term commitment that will continue over the lifetime of the operational solar farm.
- 1.1.13 The Illustrative Masterplan is provided as part of the wider Project submission (ES Volume 2, Figures 2.1a - 2.4d **[AS-020]**) . A Typical Planting Schedule is included within this report at Appendix B.
- 1.1.14 Activities and mitigation measures which will take place during the pre-commencement and construction period of the Project are defined within the outline Code of Construction Practice (oCoCP) **[APP-232 & APP-233]** as updated at this Deadline 3.
- 1.1.15 The production of the detailed LEMP under Requirement 6 will take account of the landscape mitigation set out in the Supplement Document included at Appendix D: Outline Landscape and Ecology Management Plan Supplement - Design Response to local landscape character.

1.2 Site Description

- 1.2.1 The Site is approximately 1,418 ha in size, located in the County of Oxfordshire, within parts of WODC, CDC and VWHDC.
- 1.2.2 The Project extends from an area of land in the north, situated between the A4260 and the Dorn River Valley near Tackley and Wootton (Northern Site Area), through a central section, situated broadly between Bladon and Cassington (Central Site Area), and connecting to a section further south near to Farmoor Reservoir and north of Cumnor (Southern Site Area), where the Project will connect to the National Grid transmission network. The majority of the site comprises arable land. The fields for the most part are bounded by hedgerows, mature and semi-mature trees, scrub and woodland.

- 1.2.3 Within the wider landscape, one internationally designated site, the Oxford Meadows Special Conservation Area (SAC) occurs approx. 1 km East of the Site. Eleven nationally designated sites, all of which are Site of Special Scientific Interest (SSSI), occur within 2 km of the Site. Fifty-nine locally designated sites within 2 km of the Site, including one Berks, Bucks and Oxon Wildlife Trust Reserve (BBOWT), nine Conservation Target Areas (CTA), five District Wildlife Sites (DWS), two Local Geological Sites (LGS), thirty-seven Local Wildlife Sites (LWS), Four Proposed District Wildlife Sites (PDWS) and one Proposed Local Wildlife Site (PLWS). A further SAC (Cothill Fen) lies 3.65 km south east of the Project site.
- 1.2.4 The wider landscape comprises farmland, woods, river corridors the city of Oxford and villages.

1.3 Responsibilities for Management

- 1.3.1 All maintenance and management of soft landscape areas within the Site will be undertaken by a suitably-qualified landscape management contractor and/or other specialist contractors (as required) on behalf of the Applicant and working closely with the landowner, following the end of the 12-month defects period and satisfactory completion of any landscape defects or necessary reinstatement works.
- 1.3.2 Periodically the landscape and ecology maintenance and monitoring works shall be inspected by suitably qualified and experienced persons to ensure that the landscape management operations are being completed in accordance with the relevant detailed LEMP.

2 LANDSCAPE DESIGN OBJECTIVES AND MANAGEMENT AIMS

2.1 Landscape Design Objectives

- 2.1.1 The landscape design was developed and informed through the co-ordination with the other related environmental disciplines including the Landscape and Visual Resources ES Chapter, ecology, flood risk, heritage and arboriculture teams to ensure a responsive and multi-functional design was created.
- 2.1.2 The overall design objectives of the landscape proposals are as follows;
- Landscape Integration and Local Character:
 - To respond to the setting, scale and character of the site and to provide screening to the Site from within the local area and from elevated areas to the west.
 - Provide an appropriate setting for the proposals, responding to adjacent pastoral/arable land uses where appropriate, ensuring that the landscape proposals include native species planting appropriate to the local area.
 - Enhancing and protecting the existing landscape fabric.
 - Landscape Amenity:
 - Maintain and enhance, where possible, the local residents and visitors experience within this landscape, including the retention and enhancement of public access along waymarked footpaths and the introduction of interpretation boards.
 - Biodiversity:
 - To protect, manage, enhance and monitor the nature conservation value of the site, creating a biodiversity rich environment – in line with all biodiversity objectives listed in Section 10 below.
 - Provision of designated Biodiversity Enhancement Areas, which are areas designed for native habitats and species and have low human intervention.

2.2 Management Aims

- 2.2.1 The management of the site shall seek to balance the Site's operational objectives / needs within the existing vegetation and context of the locality. It will lead to the retention, enhancement and management of the existing hedgerows and trees; particularly strengthening and maintaining hedgerow boundaries. The management aims will ensure longevity of new tree and hedge planting, and the establishment of grasslands, woodlands and most notably a landscape-scale corridor along River Evenlode.
- 2.2.2 To ensure the longevity of the landscape scheme to provide the biodiversity enhancements proposed and the required screening to the Site, the recommendations contained within this report will be implemented post practical completion of all soft landscape elements within the Site.

3 LANDSCAPE ELEMENTS

3.1.1 For the purposes of this oLEMP, the landscape elements have been grouped into hard and soft landscape elements, these have been identified below and the various elements shall be managed in accordance with best practice guidance and specific works outlined in Appendix C (Typical Maintenance Schedule). Due to the intrinsic nature of landscape and ecology, there is an overlap with the biodiversity features listed in the following section. The oLEMP should be read in conjunction with the Landscape, Ecology and Amenities Plan **[CR2-043]** accompanying the DCO application (Volume 2, Figures 7.3.3, Sheets 1 to 3), which shows the existing and proposed landscape elements.

3.2 Soft Landscape Elements

3.2.1 The existing vegetation along the site's perimeters and within it have been identified as being important landscape elements in the existing landscape character and will be retained and enhanced with new and appropriate planting where vegetation is presently sparse. This will avoid direct landscape effects and reduce visibility of the Project. Landscape elements listed below have been incorporated into the detailed soft landscape scheme. Mixes of tree and shrub species that could be included in the planting areas are given in the Typical Planting Schedule included in Appendix B along with recommended planting densities and mature heights. Planting areas are shown on the Landscape, Ecology and Amenities Plan **[CR2-043]**.

- Existing hedgerow and trees (individual and groups);
- Appropriate seeded vegetation below and between tables of the Solar PV modules;
- Existing woodlands;
- Existing scrub
- Proposed meadow grassland;
- Proposed conservation grazing areas;
- Proposed new and reinforced hedgerows, which will be managed to a height of approximately 3m during operation, managed annually, accepting that hedgerows may be managed to a lower height (the locations and heights of which to be agreed in consultation with the Oxfordshire Host Authorities) in order to support important and / or more open views, provided such maintenance falls within the scope of the environmental assessment;
- Vegetation removal will be kept to a minimum as far as practicable, as shown on the hedgerow removal plans **[EN010147/APP/2.10]**.
- Proposed tree and shrub planting; and
- Proposed woodland (including wet woodland).

3.3 Hard Landscape Elements

3.3.1 The various hard landscape elements are listed below, for further detail regarding the maintenance of these areas refer to Appendix C (Typical Maintenance Schedule).

- Existing fencing;
- Existing pathways;
- Existing field access points;
- Existing footbridges;
- Proposed fencing (including stock fencing, as necessary);
- Proposed cycle paths;
- Proposed maintenance roads;
- Proposed vehicular access points;
- Proposed vehicular access to construction site compounds;
- Proposed pathways;
- Proposed bunds; and
- Proposed educational area.

4 LANDSCAPE AND ECOLOGY ZONE OBJECTIVES

- 4.1.1 For the purposes of design, function, landscape treatment and management the existing land within the Project site has been divided into five broad geographic “zones”, albeit that they all share similar landscape typologies. These landscape zones are shown on the Landscape Management Zoning Plan (Figure 7.6.3.1).
- 4.1.2 This section describes the current landscape typologies and features of each zone together with the proposed landscape and ecology features and objectives. The objectives for each zone have informed and been informed by the Landscape, Ecology and Amenities Plan, Drawing Number **[CR2-043]**, as part of an ongoing iterative design process.

4.2 Zone 1: Northern Estate Farmlands

Current Landscape Typology

- 4.2.1 Typical open farmed landscape on the valley sides of the Dorn. Large scale open fields, with more enclosed areas of woodland towards the valley floor. Vegetation cover on valley sides of field boundary hedgerows and scattered trees. Area bisected by public right of way (PRoW) north to south extension of Dornford Lane. The PRoW is an enclosed route with a mature tree and hedgerow planting to either side.

Objectives

- 4.2.2 This zone will incorporate a planting palette which will combine with the existing and retained landscape features characteristic of the area, including lengths of hedgerow, scattered trees and small areas of woodland. By maintaining the existing and retained landscape features as part of the landscape strategy for the Project, it will help to better incorporate the Project into the existing landscape structure and mitigate the potential effects.
- 4.2.3 The landscape and ecology objectives for the zone are:
- Integration of the Projects’ built form into the existing landscape structure;
 - Retaining existing landscape features; and
 - Provide new and reinforcement planting along existing retaining PRoW corridors east to west within the zone.

4.3 Zone 2: Evenlode Corridor

Current Landscape Typology

- 4.3.1 Riparian corridor of the River Evenlode, including wet grassland, marginals, small woodland / scrub blocks and native hedgerows. Area is bordered by field boundary hedgerows and scattered trees which interface with the wider agricultural landscape on the valley sides. Generally open landscape with views in all directions to valley landscape.

Objectives

- 4.3.2 Combine existing and retained landscape features to maintain links to wider agricultural landscape. Enhance and manage floodplain meadow grass habitat for the benefit of ecological features. Retain and enhance existing PRow corridor through riparian landscape to enhance east to west link for the benefit of the community. By maintaining the existing and retained landscape features as part of the landscape strategy for the Project, it will help to better incorporate the Project into the existing landscape structure and mitigate the potential effects.
- 4.3.3 Pasture farmland and hedged field boundaries to be retained and enhanced with additional lengths of hedgerows, scattered trees and small woodland blocks to retain, so far as possible, the characteristic landscape structure and maintain the transitional landscape from agriculture to riparian grassland habitat.
- 4.3.4 The landscape and ecology objectives for the zone include:
- Enhancement of floodplain ecology through habitat creation;
 - Enhancement of footpath links;
 - Native woodland, scattered trees and hedgerows;
 - Wet Woodland;
 - Creation and management of meadow grassland;
 - Softening of site boundaries and transition to countryside; and
 - Visual screening.

4.4 Zone 3: Valley Farmland

Current Landscape Typology

- 4.4.1 A similar landscape to that of Zone 1. Large scale farmed landscape with open views across Evenlode Valley. Linear and larger blocks of woodland are evident along PRow routes and roads. With a more enclosed landscape to the lower parts of the valley sides and to the northern parts towards Bladon. Largely intact hedgerow field boundaries and scattered trees.

Objectives

- 4.4.2 Combine existing and retained hedgerow and tree boundaries, to retain links to existing woodland blocks and retain the overall landscape structure of the area. By maintaining the existing and retained landscape features as part of the landscape strategy for the Project, it will help to better incorporate the Project into the existing landscape structure and mitigate the potential effects.
- 4.4.3 The landscape and ecology objectives for the zone are:
- Integration of the Project's built form into the existing landscape structure;
 - Retaining existing landscape features;

- Provide new and reinforcement planting along existing retaining PRoW corridors throughout the zone;
- Maintain links with riparian landscape within Zone 3, including provision and retention of enhanced PRoW routes for the benefit of the local community;
- Retain and manage important hedgerows linking important landscape and ecology habitats including larger woodland blocks to the north; and
- New planting, including woodland blocks, to visually break up the mass of the Project seen in views across the valley.

4.5 Zone 4: Wooded Estate Farmland

Current Landscape Typology

- 4.5.1 Smaller scale enclosed landscape, with large blocks of woodland to the south. Small to medium size agricultural fields bounded by largely intact hedgerows and trees. Visually enclosed with limited views to wider landscape. Association with built development including Bladon and busy main road (A44) to the east with more open larger agricultural fields adjacent to the road.

Objectives

- 4.5.2 Combine existing and retained hedgerow and tree boundaries, to retain links to existing woodland blocks and retain the overall landscape structure of the area. Landscape buffer to Bladon, minimum 25 m with new hedgerow and tree planting to reinforce boundary and assist with visual screening. By maintaining the existing and retained landscape features as part of the landscape strategy for the Project, it will help to better incorporate the Project into the existing landscape structure and mitigate the potential effects.
- 4.5.3 The landscape and ecology objectives for the zone are:
- Integration of the Projects' built form into the existing landscape structure;
 - Retaining and maintenance of existing landscape features;
 - Provide new and reinforcement planting along existing retaining PRoW corridors throughout the zone;
 - Retain and manage important hedgerows linking important landscape and ecology habitats including larger woodland blocks to the north;
 - New planting, including woodland blocks, to visually break up the mass of the Project seen in views across the valley; and
 - Proposed improvements to an existing PRoW to create a 'greenway' (within the Order Limits) provided to link Bladon with A44, east to west connection. New landscape including hedgerow and tree planting to either side of PRoW corridor with minimum offsets of 5 m to the Project.

4.6 Zone 5: Southern Area

Current Landscape Typology

- 4.6.1 Enclosed landscape of small agricultural fields. Mature field boundary hedgerows with scattered trees. Larger blocks of woodland to the south. Zone is on sloping ground allowing extensive panoramic views to the northern treed ridgeline which includes Wytham Woods.

Objectives

- 4.6.2 Combine existing and retained landscape features to maintain intrinsic landscape structure of the area. New hedgerow planting to edges of development area to reduce visual effects from local public rights of way. New area of woodland planting to aid visual screening of larger built elements and enhance connectivity to existing green infrastructure. By maintaining the existing and retained landscape features as part of the landscape strategy for the Project, it will help to better incorporate the Project into the existing landscape structure and mitigate the potential effects.
- 4.6.3 The landscape and ecology objectives for the zone are:
- Integration of the Projects' built form into the existing landscape structure;
 - Retaining and maintenance of existing landscape features;
 - Provide new and reinforcement planting along and in proximity to existing retaining PRow corridors to reduce visual impact of the development;
 - Retain and manage existing hedgerows; and
 - New planting, including woodland blocks, to visually break up the mass of the Project seen in views across Farmoor Reservoir and other areas to the north of the zone.

5 LANDSCAPE ZONE PROPOSALS

- 5.1.1 Existing soft landscape elements and structure, which are the defining elements of each zone, and the proposed landscape elements along with their overall management objectives, to ensure the landscape inherent character and structure is retained so far as possible, are summarised below.
- 5.1.2 The purpose of the oLEMP is to demonstrate how the landscape proposals shown on the Landscape, Ecology and Amenities Plan (Volume 2, Figure 7.3.3, Sheets 1 to 3 **[CR2-043]**) incorporates the existing retained vegetation, including hedgerows, woodland, trees and other habitats considering the following:
- To ensure green infrastructure assets are retained wherever possible and adverse impacts on the important features and locally distinctive patterns of the existing landscape are minimised. Improving the connectivity to woodlands and hedgerows;
 - To minimise adverse impacts on the character of surrounding landscape;
 - To ensure that visually significant vegetation is retained to minimise adverse effects on visual receptors, protect important views and protect the natural beauty and setting of National Landscapes (AONBs);
 - Proposed woodland (including wet woodland), tree, scrub, wetland and grassland planting;
 - Management of, or implementation of, proposed mitigation to enhance existing green infrastructure including hedgerows, woodland, trees, scrub and wetland;
 - To enhance the character, visual quality and biodiversity of the Project and surrounding landscape;
 - To enhance the screening capacity of visually significant vegetation;
 - The landscape planting will include a variety of native trees and shrubs and wildflower grasslands;
 - New woodland will be planted throughout the Project area to visually break up the overall mass of the Project;
 - Any retained trees, scrub and hedgerows which are features of ecological value will be reviewed to see if they could be incorporated within the design, where feasible to do so;
 - Changing arable land to pasture that would see an improvement in landscape character terms; and
 - New hedgerows and provision of greenways, restoration/enhancement of field pattern character and benefit to public access, where they link from and to, settlements.
- 5.1.3 The proposed landscape elements within the Project site and more sensitive management regime, detailed within this oLEMP, will help ensure that the Project delivers coherent landscape enhancements at a local scale, commensurate with the scale of the development. Helping to better integrate

the Project into the wider landscape by enhancing and retaining elements of the local landscape character.

5.2 Zone 1: Northern Estate Farmland

5.2.1 Landscape proposals for this zone (refer to Landscape, Ecology and Amenities Plan (Volume 2, Figures 7.3.3, Sheets 1 to 3, 2.1a - 2.4d **[AS-020]**), and Landscape, Ecology and Amenities Plan **[CR2-043]**) include:

- Maintain existing linear field boundary native species hedgerows, individual trees and woodland blocks;
- Native species woodland planting to provide buffers to existing development and transport corridors, link existing areas of woodland and other habitats and provide visual screening to the Project and help to break up the overall mass of the Project;
- Native species hedgerow planting and individual trees to supplement existing hedgerows and to provide visual screening to the Project. Particularly from public rights of way (PRoW) and residential properties. Such as PRoW 416/5/20 west to east, with individual tree planting to the south of this PRoW and a minimum 5m width for the PRoW route;
- Improvements to an existing PRoW 416/24/10, near Hordley House, to the Samson's Lane (PRoW 413/5/10 and 379/19/20) to create a cycle path. Including minimum 5m corridor for shared surface, with native species hedgerow and tree planting to the north and south to visually screen views to solar panels. Interpretation boards would also be placed on this greenway. Refer to Landscape, Ecology and Amenities Plan **[CR2-043]**, Figure 7.6.3.2 A-M and Figure 7.6.3.3 (within the oLEMP);
- Appropriate buffer for the retention of veteran trees;
- Meadow grassland and enhancement area to the fringes of the Project;
- 5 x 5 m Skylark plots throughout the Project area;
- Areas left clear of solar panels to protect areas of archaeological interest; and
- Opaque screening to fence line along a part of the southern, northern and eastern edge of the B4027 and field 1.19 to mitigate effects of Glint and Glare for road users and residential properties. Refer to Appendix 4.4 Solar Photovoltaic Glint and Glare Study V2.

5.3 Zone 2: Evenlode Corridor

5.3.1 Landscape proposals for this zone (refer to Landscape, Ecology and Amenities Plan (Volume 2, Figures 7.3.3, Sheets 1 to 3 **[CR2-043]**), include:

- Maintain existing linear field boundary native species hedgerows, individual trees and woodland blocks;
- Maintain existing river corridor habitats, including aquatic and marginal vegetation;

- Meadow grassland management of grazing pasture to improve species diversity with the aim of recreating floodplain meadow;
- Native species woodland planting to provide buffers to existing development and transport corridors, link existing areas of woodland and other habitats and provide visual screening to the Project and help to break up the overall mass of the Project;
- Areas of native species wet woodland planting;
- The design will consider the creation of new habitats comprising species-rich grassland managed through hay cuts and coppicing of woodland strips and marginal and aquatic planting within the river corridor; and
- Maintain existing public rights of way across Evenlode corridor linking east to west, including bridge access over the Evenlode, for the benefit of the local community;
- Native species hedgerow and tree planting mitigation to be implemented along the northernmost boundary of properties off Lower Road. This is to reduce / minimise identified impacts from the residential property.

5.4 Zone 3: Valley Farmland

5.4.1 Landscape proposals for this zone (refer to the Landscape, Ecology and Amenities Plan (Volume 2, Figure 7.3.3, Sheet 1 to 3 **[CR2-043]**), include:

- Maintain existing linear field boundary native species hedgerows, individual trees and woodland blocks;
- Native species woodland planting to provide buffers to existing development and transport corridors, link existing areas of woodland and other habitats and provide visual screening to the Project and help to break up the overall mass of the Project;
- Native species hedgerow planting and individual trees to supplement exiting hedgerows and to provide visual screening to the Project. Particularly from public rights of way (PRoW) and residential properties;
- Appropriate buffer for the retention of veteran trees;
- Appropriate buffer, 15m minimum, from Ancient Woodland such as Bladon Heath;
- Meadow grassland and enhancement area to the fringes of the Project;
- 5 x 5 m Skylark plots throughout the Project area;
- Areas left clear of solar panels to protect areas of archaeological interest; and,
- Native species hedgerow and small groups of native species tree mitigation, to be implemented along the easternmost boundary of properties along Lower Road. This is to reduce / minimise identified impacts from the residential property.

5.5 Zone 4: Wooded Estate Farmland

- 5.5.1 Landscape proposals for this zone (refer to Landscape, Ecology and Amenities Plan (Volume 2, Figure 7.3.3, Sheets 1 to 3 **[CR2-043]**), include:
- Maintain existing linear field boundary native species hedgerows, individual trees and woodland blocks;
 - Native species woodland planting to provide buffers to existing development and transport corridors, link existing areas of woodland and other habitats and provide visual screening to the Project and help to break up the overall mass of the Project;
 - Native species hedgerow planting and individual trees to supplement exiting hedgerows and to provide visual screening to the Project. Particularly from public rights of way (PRoW) and residential properties. Such as PRoW 132/4/10 west to east, with individual tree planting to the south of this PRoW and a minimum 5m width for the PRoW route;
 - Grassland and woodland management of existing and proposed habitats to improve species diversity;
 - Cycle path linking Bladon to A44 transport corridor. Including minimum 5m corridor for shared surface, with native species hedgerow and tree planting to the north and south to visually screen views to solar panels. Interpretation boards would also be placed on this greenway. Refer to Landscape, Ecology and Amenities Plan **[CR2-043]**, Figure 7.6.3.2 A-M and Figure 7.6.3.3 (within the oLEMP).
 - Appropriate buffer for the retention of veteran trees;
 - Appropriate buffer, 15m minimum, from Ancient Woodland such as Bladon Heath;
 - Meadow grassland and enhancement area to the fringes of the Project;
 - 5 x 5m Skylark plots throughout the Project area;
 - Areas left clear of solar panels to protect areas of archaeological interest; and
 - Opaque screening to fence line along a part of the southern, northern and eastern edge of the B4027 and field 1.19 to mitigate effects of Glint and Glare for residential properties. Refer to Appendix 4.4 Solar Photovoltaic Glint and Glare Study V2.

5.6 Zone 5: Southern Area

- 5.6.1 Landscape proposals for this zone (refer to Illustrative Landscape, Ecology and Amenities Plan (Volume 2, Figure 7.3.3, Sheets 1 to 3 **[CR2-043]**), include:
- Maintain existing linear field boundary native species hedgerows, individual trees and woodland blocks;
 - Grassland and woodland management of existing and proposed habitats to improve species diversity;

- New lengths of hedgerow planting to provide visual screening from public rights of way, including 184/15/30 and 184/22/20;
- 5 x 5 m Skylark plots throughout the Project area;
- New woodland strip adjacent to existing track (PRoW 184/30/40) to supplement existing vegetation and provide visual screening to project and NGET substations located in fields to the south. Refer to Landscape, Ecology and Amenities Plan **[CR2-043]**, Figure 7.6.3.2 A-M and Figure 7.6.3.3 (within the oLEMP); and,
- Advanced planting of vegetation to the south of PRoW 184/22/20, within field 3.11, at the access to Denman's Farm. Providing visual screening along the section of the PRoW closest to the solar panels.

6 PUBLIC HEALTH ELEMENTS

- 6.1.1 Providing and maintaining new permissive paths, new cycle paths and the parts of the footpaths and bridleways that run through the arrays, within the Order Limits, to a specification to be agreed via the detailed LEMP that provides a greenway (with width, hedges, trees and trail/signage). The greenway specification is illustratively shown in the cross-sections of Figures 7.6.3.2 A-M with their locations shown on Figure 7.6.3.3 Indicative Locations of Proposed Greenways (within this oLEMP). Routes to include signs and information boards, including in formats that respond to visual impairments, with appropriate maintenance, as required. New routes to where reasonably practicable include access that supports people of all ages, including those with mobility and/or sensory needs.
- 6.1.2 Make retained and new routes through the arrays appealing to people to encourage their use by providing information boards (with details of new routes); wildflowers and hedgerows (for visual screening); children's fun trails and education boards (e.g., on wildlife, heritage and solar energy).
- 6.1.3 To use landscaping, in combination with layout and design, to minimise visibility of electrical infrastructure (other than arrays and substations) close to PRowS, in order to reduce perceptions of risk.

7 ECOLOGY STRATEGY

7.1 Ecology Baseline

- 7.1.1 A range of surveys were undertaken to inform the DCO application. Details and results can be found in ES Chapter 9: Ecology and Nature Conservation and associated Appendices.

Habitats

- 7.1.2 The majority of the Site comprises intensively-managed arable fields with few field margins. Most field margins that do occur are located in the Northern Site Area, some of which have been planted to support pollinators and some of which have developed a calcareous character.
- 7.1.3 Small areas of woodland occur around the Site although the Project has been designed to ensure that the majority of woodland does not fall within the Order Limits.
- 7.1.4 The two key ecology habitat features that occur within the site are the hedgerow network (comprising some 70km of both species rich and species poor native hedgerow) and the River Evenlode Corridor. Currently, this corridor comprises almost exclusively further intensively-managed arable fields within the active floodplain of the river.
- 7.1.5 Outside of the Site but very close to it are a number of blocks of ancient woodland and other water courses including the River Glyme and River Cherwell. The River Thames and associated floodplain meadows are also close to the Site. The various river systems both within and around the Site form a contiguous habitat corridor through the landscape.

Species

- 7.1.6 The surveys identified a range of protected/notable species present including:
- Grass snake, slow worm and common lizard were recorded in low numbers both within and immediately adjacent to the site.
 - Of the 61 bird species recorded as breeding or possibly breeding within the survey area, 33 species meet at least one criteria relating to special statutory protection or conservation importance.
 - A variety of bat species were recorded across the survey area, including the Bechstein's and barbastelle bat species.
 - Signs of badger activity were recorded during badger surveys. Due to the sensitive nature of badger data, the full findings of the surveys are reported in a confidential appendix of the ES (Appendix 9.8) which is available upon request to those with a legitimate need for the information.
 - Great crested newts (GCN) have been recorded in ponds near to the Site.
 - Invertebrate interest was limited by the agricultural nature of the landscape.

- Dormice have been recorded in the hedgerow network within the Central Site Area and are assumed to be present elsewhere within the Site, given the low density this species occurs at in hedgerow networks.

Legislation

7.1.7

A summary of relevant wildlife legislation is provided below. These will all be fully complied with.

- Bats - All bat species are legally protected under the Wildlife and Countryside Act 1981 (as amended) and the Conservation of Habitats and Species Regulations 2017 (as amended).
- Birds - All breeding birds, their eggs, nests and young are protected under the Wildlife and Countryside Act 1981 (as amended).
- Great Crested Newts - Great crested newt is legally protected under the Wildlife and Countryside Act 1981 (as amended) and the Conservation of Habitats and Species Regulations 2017 (as amended).
- Dormouse – Dormouse is legally protected under the Wildlife and Countryside Act 1981 (as amended) and the Conservation of Habitats and Species Regulations 2017 (as amended).
- Grass Snake - Grass snake is partially protected under Schedule 5 of the WCA 1981.
- Badger - Protection of Badgers Act 1992.

7.2

Ecology Strategy

7.2.1

The overall ecology strategy for the Project aims to facilitate the creation of a coherent and resilient ecological network that seeks to increase the biodiversity of the Project site in a controlled manner such that it integrates with and supports the existing wider ecology of the surrounding landscape. It also aims to support the broader aims of the landscape proposals with respect to integration and amenity.

7.2.2

The strategy aims to use the Project to improve wider connectivity, linking the woodlands present adjacent and near the Site with the local water courses and further afield with the wider landscape. It also aims to enhance the overall biodiversity status of the land the Project sits within through the change from intensive arable management to a more sensitive ecology-focused regime, including the removal of agricultural chemical inputs. It is informed by the aims of the Oxfordshire Nature Recovery Network (ONRN) which was considered at the very earliest stages of the Project design to ensure it accounts for a wider county-level ecology network.

7.2.3

Central to the delivery of the strategy is the presence of the River Evenlode Corridor running broadly north-south through the Central Project Area. This is a landscape-scale feature providing continuous habitat to facilitate the movement of species along it and providing ecological linkage both through the Project site and with the surrounding habitat, facilitating wildlife dispersion to the wider landscape. This corridor is identified in the ONRN as being one

of the main opportunities in this area. As such, it's incorporation into the ecology strategy for the Project at an initial concept stage was considered crucial to the delivery of a coherent, landscape-scale enhancement.

- 7.2.4 The River Evenlode Corridor will be restored to a mosaic of Floodplain Meadow to comprise a matrix of (primarily MG4) grasslands, wet woodland and wetland features to provide enhanced habitat for a range of species including bats, birds and invertebrates. The area will be restored through a comprehensive restoration plan, based on the principles set out in this oLEMP, to be included within a LEMP specific to that area. The LEMP for the Evenlode Corridor will be overseen by a steering group that would include Berkshire Buckinghamshire and Oxfordshire Wildlife Trust (BBOWT), relevant planning authorities and local interest groups, along with the Applicant and land manager. It would include details of establishment (including the source of any green hay that might be used), management and any grazing strategy to be adopted, for example, type and location of cattle management, grazing infrastructure etc.
- 7.2.5 Floodplain meadow is a priority habitat with many Local Wildlife Sites in the surrounding landscape designated for its presence, along the River Thames, in particular. The creation of such habitat will require knowledge of a range of variables including ground and surface water regimes, soil chemistry, water quality, and topography. These and other factors will require detailed consideration in the design, creation and ongoing management of the new habitats and will be described in the LEMP for the Corridor.
- 7.2.6 The ultimate goal of the Corridor will be to manage it in such a manner that it contributes significantly to the increase in floodplain habitat within Oxfordshire and, in time, be of at least Local Wildlife Site quality.
- 7.2.7 The connectivity between the Site and surrounding woodlands will be enhanced through the provision of over 26.5km of new hedgerow, which will be maintained at the height of approximately 3m (see paragraph 3.2.1). Many of these will be associated with new greenways where a double hedge line will be planted either side of an existing Public Right of Way (PRoW). In particular, these will provide links in the Northern Site Area between Tackley Wood and the Blenheim Estate, the Central Site Area between the Blenheim Estate and Bladon and Burleigh Woods and the various woodlands in the Southern Site Area including the SSSI at Wytham. In many cases, such greenways will be created across existing arable fields where such linear features do not currently occur further enhancing the connectivity. A further circa 30km of existing hedgerow will be reinforced around the Site with additional planting to strengthen existing corridors.
- 7.2.8 In addition to the River Evenlode Corridor, a range of different buffers are proposed depending on the feature in question, as detailed below. Beetle banks will be created along the edge of south-facing hedgerow buffers to support invertebrate populations and the birds/bats that feed on them.
- 7.2.9 Areas of former arable land around the Site that are to be protected to preserve the underground archaeology and to protect sensitive landscape receptors will be managed as meadow grassland to provide wildlife nodes within the Site. These will be managed to provide a continuity of habitat for

breeding and wintering birds but also enhanced habitat for GCN, reptiles, invertebrates and bats. They will provide more open habitats within the solar site and stepping stone habitats, linked through the enhanced hedgerow corridor.

- 7.2.10 In addition to the strategic enhancements, the grassland management within and around the solar arrays will be subject to a new conservation grazing regime. These areas will be seeded to a modified grassland habitat type, once established these areas will be grazed (primarily by sheep). The grazing regime will be at a low stocking rate with the primary aim of ensuring the management of more vigorous grass species such that they do not dominate swards. A pause in the grazing over much of the site will allow grasses and wildflower to set seed.
- 7.2.11 Recognising the proximity of Oxford Airport to the Central Site Area, landscape design within 1.5km will be designed in general accordance with the principles set out in CAA CAP 772 Wildlife Hazard Management at Aerodromes. This will include ensuring that there are no water features present, no additional scrub/tree planting along hedgerows and grassland areas outside of the panel arrays managed according to a long grass policy, maintaining a sward height of circa 220-300mm. In addition, once operational, the Applicant will ensure on-going dialogue with the airport with respect to the management of wildlife risk across the Project site as a whole, in line with CAST Renewable energy developments: solar photovoltaic developments CAST Aerodrome Safeguarding Guidance Note.
- 7.2.12 The combination of improved connectivity and more sensitive management regime will help ensure that the Project delivers coherent ecology enhancement at a landscape scale, commensurate with the scale of the development.

7.3 Tree Surveys

- 7.3.1 Detailed tree surveys (to *BS5837:2012* standard) will be completed within an area of no less than 15m from all proposed development areas; 'development areas' will include solar array zones, new access road junctions, internal roads/tracks, construction compounds, all cabled connection routes, sub-stations, points of connection, improvements to existing (off site) highway and any other built infrastructure associated with the solar scheme.
- 7.3.2 The results of the baseline tree survey will be used to guide the detailed solar array and infrastructure designs, to try and minimise significant tree impacts.
- 7.3.3 Once the detailed solar scheme has been fixed & agreed with the LPA, a site-wide arboricultural impact assessment and method statement report will be provided to demonstrate the residual tree impacts, also providing protection methodologies and tree mitigation strategies. This report will include detailed tree removal & protections plans".

8 ECOLOGY MITIGATION MEASURES

8.1.1 This section outlines the ecological mitigation required to ensure that protected and/or notable species and habitats are not harmed during management and maintenance activities. These measures are designed to complement those that are expected to be required through the relevant licence regimes.

8.1.2 Measures specifically required for the construction period are set out in the outline Code of Construction Practice [EN010147/APP/7.6.1].

8.2 Habitats

8.2.1 The ecology onsite will provide a mosaic of habitats comprising grassland of various types and woodland/scrub to provide a matrix of habitats suitable for a variety of species. Woodland and hedgerows will also be maintained or managed where applicable.

8.2.2 Habitat creation will include:

- Circa 100ha of new Floodplain mosaic habitats along the River Evenlode Corridor to be dominated by MG4 grasslands and other wetland grass communities and wet woodland habitats appropriate to hydrology/soil conditions;
- At least 26.5km of new species rich hedgerow, which will be maintained at the height of approximately 3m (see paragraph 3.2.1);
- At least 26km of existing hedgerow to be reinforced through additional planting;
- Circa 5ha of new native woodland creation including planting to strengthen connectivity between Burleigh Wood and Bladon Heath around Burleigh Lodge;
- 36ha of wildflower grasslands to be managed for wintering and breeding birds within areas retained to protect buried archaeology;
- 98 ha of similar wildflower grassland to be managed for wintering and breeding birds within areas retained as buffers around sensitive landscape receptors.
- Tussocky grasslands alongside hedgerows. Hedgerow buffers will be at least 5m;
- Flood attenuation features to north of Cassington to be managed as wetland habitats;
- Additional mixed scrub habitats alongside hedgerows to enhance them for nightingale; and
- A range of grasslands within the solar arrays to be managed for conservation value (including temporary satellite compounds, if not required for solar installations).

8.2.3 The creation of these new habitats will provide nesting sites for breeding birds (where appropriate) and maintain and enhance connectivity for foraging

and commuting bats. It will also support a variety of invertebrates, reptiles and amphibians found on site.

- 8.2.4 Hedgerows and their buffers will be managed to provide a diverse structure, ensuring a variety of ecotones (grassland, tussock grassland, scrub, hedgerow, individual mature trees).
- 8.2.5 Waterbodies are important for the ecology on site. In addition to various scrapes to be created around the site, the creation of a new water body to the north of Cassington will serve primarily as flood attenuation but will also provide additional aquatic habitat for a range of species.
- 8.2.6 All development will have a minimum 10 m buffer from the banks of ordinary existing watercourses.
- 8.2.7 All land used for temporary satellite compounds during construction will be managed as grassland if not required for solar installations.
- 8.2.8 All deer fencing to be erected around solar arrays will be designed to be permeable to smaller mammals such as badger and fox to ensure permeability of the Project site for these species will be retained.

8.3 Great Crested Newt

- 8.3.1 A Natural England mitigation licence or District Level License for GCN will be obtained for the Site.
- 8.3.2 If a mitigation license is pursued, many of the measures detailed in the licence will be implemented prior to the start of any site works that have the potential to affect habitats in which GCN could be present. The method statement attached to the licence will include precautionary species protection measures which will be implemented during construction and supports designed to protect individuals and maintain the favourable conservation status of GCN in the locality. Work carried out under a Natural England EPS mitigation license for GCN will be supervised by the ecologist named on the licence or their accredited agent.
- 8.3.3 The change to conservation grazing and improved habitat corridors along hedgerows will substantially benefit GCN present on and around the Site.
- 8.3.4 Once the new habitats had been created, the installation of refugia and hibernacula will be undertaken to enhance the suitability of these new habitats for use by GCN.
- 8.3.5 In addition, the provision of water features within Tier A buffers (see below) will provide further water-based habitat for GCN within the Project site. Further details on these features are set out at section 11.4 below.
- 8.3.6 Monitoring of GCN will be undertaken in habitat creation and enhancement areas.

8.4 Badgers

- 8.4.1 All badger setts will be retained, where possible, with a 30 m buffer of undisturbed habitat. Retained badger setts must not be isolated from other

areas of suitable habitat by fencing and construction activity, as advised by a suitably qualified ecologist.

- 8.4.2 Any impacts of the Project on Badgers such as disturbance or any such closure would be completed under appropriate licence from Natural England and would include suitable mitigation, such as the provision of artificial setts, should that be necessary.

8.5 Bats

- 8.5.1 The Project will incorporate appropriate buffers either side of any important bat flight line, as identified by radio tracking and other studies of the Project Site. Such buffers will not include any solar infrastructure and are to ensure that bats can use the landscape unhindered by any interaction between their echo location and solar panels. The width of the buffers will be measured from the edge of the feature to the nearest solar infrastructure (usually perimeter fencing). Three tiers of buffers will be incorporated:
- 8.5.2 Tier A buffers will be 25m on either side of the feature and will be established in the following locations:
- Around ancient woodlands in the centre of the site (Pinsley, Burleigh and Bladon Heath);
 - Main hedgerow flightlines leading out of these woodlands;
 - The Cotswold Railway Line;
 - The green lane in the Northern Site Area with links to both the river Dorn and Tackley Wood;
 - The River Evenlode;
 - Sewage Treatment Works north of Cassington; and
 - Watercourse coming from Bladon Heath south towards the railway
- 8.5.3 Given the importance of the Tier A buffers to bat ecology within the landscape, the location of these will be fixed at this stage to ensure their location is secured by virtue of their inclusion within this oLEMP. The location of the Tier A buffers is shown on Figure 8.1. Tier A buffers cover an area of circa 85ha and total circa 22.09km in length. Note that the area includes the linear features protected e.g. the railway, but does not include any woodland.
- 8.5.4 Tier B buffers will be 10m either side of the feature and are included to provide linkages through the Project site with the Tier A buffers and the wider landscape. Their final location will be determined during detailed design but will follow the following principles:
- Alongside hedgerows linking key flightlines (i.e. Tier A buffers) to key foraging resources;
 - Alongside hedgerows linking key flightlines to other flightlines; and
 - Alongside hedgerows with mature trees.
- 8.5.5 In addition, all watercourses will have 10m buffers and would be included in Tier B with respect to buffer size.

- 8.5.6 Tier C buffers would be 5m either side of a feature and would cover the remaining hedgerows on the Project site.
- 8.5.7 All buffers will be managed to ensure a diverse range of habitats with as many ecotones as possible. This will include a range of grasslands, scrub and mature trees along the length of a buffered feature. Buffers alongside woodlands will be managed to facilitate woodland expansion, where appropriate.
- 8.5.8 In addition, scrapes or other water features will be created within the Tier A buffers in appropriate locations, depending on local hydrology, archaeology, agricultural land classification and other environmental constraints.
- 8.5.9 In the Northern Site Area, there are some hedgerows along the green lane with circa 10m wide areas that have been seeded with flowering species to support bees and other pollinators. Where these occur, they will be incorporated into the 25m buffers in those areas with management adapted accordingly.
- 8.5.10 Any trees subject to removal during management will be surveyed by a suitably experienced ecologist to confirm whether potential roost features are present. Should potential roost features be present, further aerial inspection will be undertaken, for example by a qualified tree climber who also holds a Natural England bat survey licence to confirm whether these are in use by bats.
- 8.5.11 In the event that bats, or signs of bats are found indicating a roost, tree felling would be postponed and no works affecting the trees, or which could indirectly affect the roost would be carried out until a Natural England bat mitigation licence has been obtained.
- 8.5.12 A programme of new bat boxes will be incorporated at the start of construction across the Project site. Locations will be detailed in a LEMP and will include a variety of box types.

8.6 Dormouse

- 8.6.1 Hedgerow and woodland management will take place during winter when dormice are not active (i.e. from November until February). This will also help avoid impacts to nesting birds.
- 8.6.2 In order to protect any dormouse that could be hibernating within tall grasslands directly adjacent to hedgerows, all flailing of hedgerows adjacent to tall grasslands will be undertaken utilising a long reach tractor flail from a minimum of 2 m from the edge of hedgerow bases.
- 8.6.3 In the very unlikely event that a dormouse is encountered during habitat works, it would be carefully captured by a licensed ecologist and placed in suitable habitat away from the works.

8.7 Breeding birds

- 8.7.1 All hedgerows, trees, ponds and woodland to have minimum of 5m buffer. All buffers to be protected with appropriate fencing, to be set up before construction commences.

- 8.7.2 To avoid disturbance to nesting birds, any vegetation removal which is required will be undertaken outside of the bird nesting season (March to August inclusive) where practicable. Where this is not practicable, the relevant areas will be inspected by a suitably experienced ecologist 48 hours prior to removal, to check for the presence of nesting birds. If an active nest is present, the nest and a minimum 5m buffer will need to be retained until the young birds have fledged.
- 8.7.3 Cutting of meadow and tussock grasses will be carried out in early autumn to prevent disturbance of ground nesting birds and all cut material disposed of off-site. This will help ensure that species such as skylark are able to nest successfully in these areas. Leaving the grassland undisturbed throughout the nesting season will ensure that species that raise multiple broods such as skylark, can do so. Areas of grassland within 50m of hedgerows where skylark are unlikely to nest will be subject to rotational management to enable a variety of sward heights and associated habitat structure to be maintained.
- 8.7.4 Areas of dense scrub will be planted along hedgerows to support nightingale. In addition, on woodland edges, dense scrub and shrubs will be allowed to develop to offer feeding and nesting habitat for this species.
- 8.7.5 A scheme of installation of new bird boxes will be implemented at the start of construction across the Project Site. Locations will be detailed in a LEMP but will include a variety of box types, some for woodland species and some for more urban settings.

8.8 Reptiles

- 8.8.1 Field margins and other vegetation on site will be cut in stages, under the precautionary principle and overseen by a suitably qualified ecologist. Cutting of meadow and tussock grasses will be carried out in early autumn to prevent disturbance of reptiles and all material disposed of off- site.
- 8.8.2 The change to conservation grazing and improved habitat corridors along hedgerows will substantially benefit reptiles present on and around the Site.
- 8.8.3 Once the new habitats had been created, the installation of refugia and hibernacula will be undertaken to enhance the suitability of these new habitats for use by reptiles.

8.9 Invertebrates

- 8.9.1 The removal of agricultural pesticide use and revision to a more biodiverse landscape will greatly benefit the invertebrate population both within the Site and the surrounding area.
- 8.9.2 In addition, the provision of the bare ground arisings from the creation of scrapes within the Tier A buffers will create the open substrate habitats that will support a range of invertebrate species including burrowing bees and wasps and hunting grounds for beetles.
- 8.9.3 The tussock grassland within hedgerow buffers on south-facing hedgerows will also act as enhanced habitats for beetles. Opportunities to create small

‘beetle banks’ through ploughing arisings into a linear feature along the edge of the buffer during habitat creation will be taken.

9 BIODIVERSITY NET GAIN

- 9.1.1 The approach to Biodiversity Net Gain (BNG) that has been adopted by the Project is set out in ES Volume 3, Appendix 9.13: Biodiversity Net Gain Statement [EN010147/APP/6.5].
- 9.1.2 The conclusions of that Statement with respect to the total BNG to be delivered by the Project rely on the landscape designs and other measures set out within this oLEMP.
- 9.1.3 The Environment Act 2021 requires that development deliver 10% BNG, including those consented under the Planning Act 2008, although this will not be binding on such projects until May 2026. As such, the regime is not currently binding on the Project.
- 9.1.4 Notwithstanding this, each LEMP submitted to the relevant authority for approval pursuant to DCO Requirement 6 will include an explanation of how the plan contributes to the achievement of BNG. It is anticipated that the Project will achieve a BNG of at least 70% for habitat units across the authorised development, calculated using the Statutory (version 4.0) Biodiversity Metric and as set out the Biodiversity Net Gain Statement. This will form the BNG Target score for habitats for the Project for the purposes of judging future management. With respect to excess credits over and above the 70% committed to, in recognition of paragraph 7.14 of the Defra guidance on BNG for energy NSIPs (Defra 2026), the Applicant confirms that they wish to retain design flexibility and that any excess credits may also be available for other projects. Therefore, in making their decision, the Secretary of State can assess the biodiversity outcomes associated with the application by basing their decision with respect to BNG on the 70% committed to.
- 9.1.5 It is further anticipated that the Project will deliver at least 50% of hedgerow net gain as a result of circa 26.5km of new hedgerow planting to be completed. This will form the BNG Target score for hedgerows.
- 9.1.6 In addition, it is anticipated that the Project will deliver at least 20% of watercourse net gain as a result of removing agricultural encroachment, where relevant, from all of the watercourses on the Project site and the implementation of a 10m buffer corridor either side of these watercourses.
- 9.1.7 Note that, although the total build programme for the Project is circa two years, works within any given field will be significantly shorter (<1 year). On this basis, habitat creation will be <1 year after impact and, as such, no temporal multiplier has been applied (either advance or delay in planting).
- 9.1.8 Further, the commitments set out to the delivery of BNG relate to the delivery of units within the areas of permanent impact, i.e. the installation areas and landscaped areas. Temporary impacts within the cable corridor will be <1 year in duration, with all impacts associated cable laying capable of being restored within 2 years of those impacts.

10 BIODIVERSITY OBJECTIVES AND TARGETS

10.1 Biodiversity Aims

10.1.1 The key aims for biodiversity are defined as:

- Meet biodiversity net gain (BNG) targets;
- Create and maintain areas of grassland supporting a mixture of grasses and wildflower species;
- Create a landscape-scale corridor along River Evenlode providing foraging and breeding habitat for a range of protected and notable species;
- Create and enhance habitats to provide nesting habitat and foraging resources for birds;
- Create and maintain additional habitat for amphibians and invertebrates;
- Protect mature tree resources and allow deadwood features (invertebrates, bats and nesting birds);
- Promote habitat connectivity across the site;
- Provide for a number of specific ecological enhancements;
- Maintain areas of grassland suitable for ground-nesting birds;
- Maintain winter food source for farmland birds;
- Increase connectivity across the landscape;
- Maintain the accessibility of habitats across the solar farm for fauna species including badgers through the design of deer fencing;
- Identify any negative habitat trends and effectively address through management and/or remedial actions; and
- Ensure that all management actions comply with all wildlife legislation.

10.2 Biodiversity Objectives

River Evenlode Corridor

- Establish and maintain grassland diversity in the corridor, to be dominated by MG4 grasslands but with other types of wet grassland in addition. For example, this could include swamp and mire communities in areas too wet for MG4 (e.g. MG27, MG9 and S7);
- Establish and maintain varied sward height as continuous habitat throughout the corridor;
- Establish and maintain a variety of scrapes and other wetland habitats to ensure a diversity of structure, taking advantage of existing channels and features;
- Establish and maintain specific enhancements including log piles, hibernacula, insect hotels and bird and bat boxes;

- Ensure habitats provide food, cover and prey for fauna species;
- Avoid all unnecessary tree management works maintaining a balance between health and safety, arboricultural value and biodiversity value (deadwood, flaking bark, cavities);
- Establish and maintain connectivity across the corridor, linking other areas of existing and proposed connective features, in the form of hedgerows and woodlands; and
- Enhance areas adjacent to waterbodies through infill planting, thereby creating intact adjacent habitats.

Wildflower Meadow Grasslands

- Maintain higher wildflower diversity in the grassland;
- Either via grazing or cut, ensure sward height is circa 20-60cm (i.e. optimum height for ground nesting birds such as skylark) in March and that fields are left undisturbed through until the end of the bird breeding season in August;
- Maintain varied sward height tussocky grassland as continuous habitat corridors on the field perimeters;
- Establish and maintain species-specific enhancements including log piles, hibernacula and insect hotels;
- Include wintering seed mixes to provide foraging resources for wintering birds; and
- Ensure that meadow grassland provides food, cover and prey for fauna species.

Solar Array Grasslands

- Maintain moderate botanical diversity in the grassland through conservation grazing;
- Maintain varied sward height tussocky grassland as continuous habitat corridors on the field perimeters outside of array area fencing;
- Maintain the health and structure of wildflower grassland below and between solar panel arrays; and
- Establish and maintain species-specific enhancements including skylark plots in between panels.

Native Shrub and Trees

- Maintain dense, closed structure of scrub;
- Establish and maintain trees and scrub comprising a mixture of native species;
- Promote flowering/ fruiting of shrubs and trees through low intensive management;

- Avoid all unnecessary tree management works maintaining a balance between health and safety, arboricultural value and biodiversity value (deadwood, flaking bark, cavities); and
- Establish and maintain species-specific enhancements including bird and bat boxes.

Woodlands

- Increase native species diversity of existing woodlands;
- Establish and maintain well-structured and diverse woodland comprising a mixture of native species;
- Promote flowering/ fruiting of shrubs and trees through low intensive management;
- Avoid all unnecessary tree management works maintaining a balance between health and safety, arboricultural value and biodiversity value (deadwood, flaking bark, cavities); and
- Establish and maintain specific enhancements including log piles, hibernacula, insect hotels and bird and bat boxes.

Hedgerows

- Increase the diversity of native woody species in species-poor hedgerows;
- Increase the diversity of hedgerow ground flora;
- Establish and maintain new native species-rich hedgerows at the height of approximately 3m (see paragraph 3.2.1);
- Establish and maintain new hedgerows with a dense structure;
- Promote flowering/ fruiting of shrubs and trees through sensitive management; and
- Avoid all unnecessary tree management works maintaining a balance between health and safety, arboricultural value and biodiversity value (deadwood, flaking bark, cavities).

11 OUTLINE HABITAT MANAGEMENT

11.1 Grassland

New Grassland Establishment (Year 1)

- 11.1.1 Newly-sown grassland will be either cut monthly using cut-and-collect machinery or subject to light grazing throughout the first year of establishment to a height of 40-60mm. Any residual perennial weeds such as docks, thistles, and common nettle will be subject to appropriate treatment (such as dug out or spot treated). Broadcast herbicides will not be used.
- 11.1.2 As the sown wildflowers and grass species are perennial they will be slow to germinate and grow and will not usually flower in their first growing season. There will often be a flush of annual weeds from the soil in the first growing season which may grow up and obscure the meadow seedlings beneath. The management actions will control annual weed growth, prevent significant spread and help maintain balance between faster growing grasses and slower developing wildflowers.
- 11.1.3 If practical, the MG4 grassland of the River Evenlode Corridor will be created using a green hay cut collected from nearby examples of MG4 and associated NVC communities, subject to agreement of the owners and managers of donor sites and following the approaches outlined in technical guidance and consultation with local experts. Donor site/s are to be determined and will be selected in consultation with site managers to match the existing and target soil and drainage conditions. Supplementary planting of rare and distinctive species, grown from local plant material will be considered.

Grassland Management (Year 2 onwards)

- 11.1.4 In all subsequent years, the grassland will be managed as described in Table 11-1.
- 11.1.5 The soil fertility of the arable field will increase the growth of a few species and over time would be likely to adversely affect the populations of wildflower species. Consequently, weed growth will be managed at a higher rate during the first five years to control the growth of the most dominant grasses.

Table 11.1 Grassland Management Specifications

Grassland types	Management Specification	Timing
River Evenlode Corridor	The grassland within the corridor will be managed by low-intensity cattle grazing, if possible. The stocking density will be agreed at the outset of the management by the management team and an ecologist. Changes to the stocking density will be made only following review of the grassland condition and after agreement with an ecologist. Any scrapes created will be cut on a three-year basis and inspected for silt build up. If necessary, additional excavation will take place to remove material.	September - March

Grassland types	Management Specification	Timing
Tussocky grassland field margins outside of solar array fence line	Removal of weeds through appropriate means (such as weed wipe or spot treatment) as required throughout the year. No mowing between May and the end of August to promote the development of a tussocky structure and flower growth. This will also facilitate seed availability for foraging birds/amphibians, especially over winter, and invertebrate resources for both bats and birds (for example skylark and other birds that feed invertebrate prey to newly-hatched young). Cut once every 2-3 years in September to a height of 50mm using cut-and-collect machinery, including beetle banks.	September - March
Grassland within solar array fence line	Removal of weeds as required throughout the year. Conservation grazing with sheep at stocking rate no greater than six sheep per hectare. Stocking rate can be increased following agreement with Project ecologist and Local Authority if vegetation growth is rapid in some years.	Year-round March-April and Aug-Nov (until too wet to graze)
Meadow grassland in areas for breeding/wintering birds	Low-intensity grazing with sheep or cattle or hay/silage cut. If grazed, spring (i.e. March-April) stocking rates will be reduced to one cow or three sheep per hectare of grazable land to avoid trampling any early nests but with enough animals to ensure sward height in March is between 20 and 60cm to facilitate nest building for skylark and other ground-nesting birds. August to November stocking rates will be set to ensure sward height is low over winter. Top-up cut may be necessary. Allowing the grass to grow undisturbed through the bird breeding season will allow for potentially multiple broods for species such as skylark who can have up to four broods a season in optimal conditions. Grasses to be allowed to set seed to ensure wintering foraging opportunities for birds, including skylark and other seed-eating species. Grassland within 50m of hedgerows in these areas, where skylark unlikely to nest, to be subject to rotational management cut/grazed on a 1-3 year cycle (i.e. some areas cut every year, some cut only once every three years).	Year-round March-April and Aug-Nov (until too wet to graze) if grazed, September, if cut

11.2 Woodlands

- 11.2.1 Areas of woodland will be created throughout the Site. These will follow the Government's definition of woodland and be, as far as practicable:
- a minimum area of 0.5ha;
 - a minimum width of 20m;
 - a potential tree canopy cover of at least 20%; and
 - a canopy consisting of specimens that meet the definition of trees

- 11.2.2 To maximise the chances of the successful establishment of new planting, any bare root stock would have their whole root system dipped in mycorrhizal fungi slurry following approved concentrations. Where rabbit or deer grazing results in the loss of planted stock, protection measures would be employed such as guards or fencing. All dead, dying or diseased plants recorded during the first five years will be replaced in the following winter planting season with stock of similar specification to the original. Formative pruning would be adopted in the first five years to promote dense growth follow methods in accordance with BS:3998.
- 11.2.3 Woodlands will be subject to annual inspections. They will be allowed to develop a diverse structure through periodic thinning.
- 11.2.4 The rate of establishment of self-seeded and planted shrubs; and the structure they develop will inform management decisions following on from the initial aftercare period. Where practical, long term management decisions will promote the extent of dense scrub cover for nesting birds. Options would include the coppicing of selected shrub species including hazel.

11.3 Hedgerows

New Hedgerows

- 11.3.1 New native species hedgerows will be planted in the Biodiversity Areas (as shown on the Illustrative Masterplan (Volume 2, Figures 2.1a - 2.4d **[APP-020]**)) and in the Site area, providing additional links between blocks of off-site woodland.
- 11.3.2 A mixture of native species will be used.
- 11.3.3 The majority of hedgerows will be protected from stock damage through the security fencing installed around the arrays. However, where this is not the case, stock-proof fencing will be installed to ensure no damage from grazing animals.
- 11.3.4 During the aftercare period both sides of the whole of the new hedgerow will cut after the first growing season at the end of Year 1 and again at the end of Year 3 to encourage dense growth and maintain an even shape. Where gaps occur, infill with native stock appropriate to planted hedge.
- 11.3.5 From Year 5 onwards the sides of the hedgerow will be trimmed back on a 3-5 year rotation in late Autumn (i.e. with a fifth to a third of all hedgerow cut each year). The hedgerow will be maintained at a height of approximately 3m (see paragraph 3.2.1), as a broadly 'A' shaped structure to continue to encourage dense growth to ground level and avoiding creating a wide flat top.
- 11.3.6 Trees within hedgerows will be allowed to continue to mature and will be protected during hedgerow cutting. Minimal management of larger trees is required and deadwood features will be allowed to develop where safe and practical. Where limb removal is required, the wood will be retained within the site to provide habitat for invertebrates.
- 11.3.7 Cavities in trees may provide potential roost features for bats and will be left undisturbed. If works affecting tree cavities are planned, an inspection will be

undertaken by an ecologist prior to the works to ensure no roosts will be affected.

- 11.3.8 All hedgerow adjacent to tall grasslands will be cut utilising a long reach tractor flail from a minimum of 2 m from the edge of hedgerow bases to protect any dormouse that could be hibernating within tall grasslands directly adjacent to hedgerows.
- 11.3.9 Works will be undertaken outside of the bird nesting season (March-August inclusive) or after confirmation by an ecologist that no active nests are present in the affected habitat.

Retained Hedgerows

- 11.3.10 Gappy and species-poor hedgerows will be supplemented by species infill planting. A mixture of native species will be used.
- 11.3.11 The hedgerows will be trimmed back on a 3-5 year rotation in late autumn (i.e. with a third-fifth of the hedgerow cut each year) to a broadly 'A' shape structure.
- 11.3.12 Some trees within hedgerows will not be cut and will be allowed to mature in size to create vertical diversity of structure within the hedgerow.
- 11.3.13 All hedgerow adjacent to tall grasslands will be cut utilising a long reach tractor flail from a minimum of 2 m from the edge of hedgerow bases to protect any dormouse that could be hibernating within tall grasslands directly adjacent to hedgerows.
- 11.3.14 Existing hedgerows around the larger areas of grassland that will be used by skylark will be maintained at their current height as far as is practicable to minimise any loss of openness of these areas.
- 11.3.15 Works will be undertaken outside of the bird nesting season (March-August inclusive) or after confirmation by an ecologist that no active nests are present in the affected habitat.

11.4 Scrapes

- 11.4.1 Scrapes will be created in appropriate locations within the Tier A buffers, depending on local hydrology and agricultural land classification. Each scrape will be created using appropriate plant and will be 1-2m deep and up to 100m² in area. One such feature will be created every 500m on each side of the corridor, depending on local conditions.
- 11.4.2 Scrapes will be located outside of root protection areas with their exact location to be determined during detailed design following the principles set out here.
- 11.4.3 They will not be created as part of any corridor within 1.5km of Oxford Airport to ensure they do not increase bird strike risk in this area.
- 11.4.4 Arisings from scrapes will be used to create bare earth mounds which will be allowed to vegetate naturally.

- 11.4.5 Scrapes will be allowed to fill with water and vegetate naturally with the aim of creating features that can increase invertebrate abundance (and hence foraging for anything that feeds on them) while also providing a water source for other wildlife.

11.5 Great Crested Newts

- 11.5.1 Hibernacula for GCN will be created within 500 m of ponds within and surrounding the Site. The hibernacula will be created in accordance with the designs in Appendix A Figure 1.
- 11.5.2 Furthermore, log piles will be placed throughout wildflower meadows grasslands to create sheltering opportunities for GCN. Other amphibians and reptiles will similarly benefit from the creation of hibernacula and log piles within the site.

11.6 Breeding Birds

- 11.6.1 Bird boxes will be placed within retained trees throughout the project site. A range of box bird types will be utilised in order to provide nesting habitat for a range of bird species. Where possible, the selection of box types will take into consideration species identified during the breeding bird surveys.
- 11.6.2 Bird boxes will be placed in trees at varying heights above 2 m and as advised by the project ecologist depending on the target species.
- 11.6.3 Bird boxes will be of sturdy construction, built to last into the future. Example bird boxes have been provided in Appendix A Figure 2.

11.7 Skylark plots

- 11.7.1 Skylark plots are to be created within the solar arrays in general accordance with Countryside Stewardship management practices as set out in AB4: Skylark Plots (Natural England, 2024). The plots provide Skylarks with suitable access to additional foraging habitats throughout their breeding season.
- 11.7.2 The provision of Skylark plots at a ratio of two plots provided for each potential lost territory is an accepted and widely used mitigation strategy for developments that will result in the loss of Skylark territories. Skylark plots also benefit other farmland bird species.
- 11.7.3 A Skylark plot is a 5 m x 5 m area of grassland field that will be created by leaving an unsown plot within the solar arrays.
- 11.7.4 The final locations of plots will be determined during detailed design. However, they will be preferentially located towards the edges (within 100m) of array areas where those areas border fields outside the Project site to enable skylark breeding out with the Project site to access them easily (skylark tend to forage 100-150m from nest sites).
- 11.7.5 The plots can be managed with the same treatments as the remainder of the field. There is no need to keep the plots weed-free but spot-treating with herbicide in April will help skylarks to access foraging areas.

- 11.7.6 No mechanical weeding will take place.
- 11.7.7 Skylark plots will be created across the Project site as a whole at a density of two plots / ha.
- 11.7.8 The plots will be maintained on an annual basis for the duration of the operational life of the Project.

11.8 Bats

- 11.8.1 Bat boxes will be placed on retained trees throughout the Site to the site to provide additional roosting habitat. The boxes will be placed at varying heights above 3 m, positioned with a southeastern and southwestern orientation.
- 11.8.2 Where not enough suitable retained trees remain, bat boxes will be pole mounted.
- 11.8.3 The boxes will be fixed securely that they will not be subject to extreme movements from the wind. The boxes will be positioned in discrete locations to minimise the likelihood of predation (including from domestic pets) and interference from people. They will also be located away from bright lighting and near to vegetation cover.
- 11.8.4 Bat boxes will be of sturdy construction, built to last into the future. Example bat boxes have been provided in Appendix A Figure 3.

11.9 Invertebrates

- 11.9.1 Insect hotels are to be included in wildflower meadow grasslands across the site to provide insects sheltering habitat.
- 11.9.2 Examples of insect hotels are provided in Appendix A Figure 4.

12 MONITORING PROCEDURE

12.1 Introduction

- 12.1.1 The long-term monitoring of habitats and their biodiversity value will specifically assess the extent to which the management actions are achieving the defined objectives.
- 12.1.2 All monitoring described below will be reported to the relevant planning authority along with additional stakeholders such as Natural England and BBOWT. The reporting will include details of any necessary remedial measures or modifications to individual LEMPs. Data from monitoring will also be provided to the Thames Valley Environmental Records Centre.
- 12.1.3 Any additional monitoring considered necessary with respect to findings during pre-commencement surveys, for example, will be incorporated into the monitoring schedule, as necessary. Similarly, where pre-commencement surveys are undertaken, these will form the baseline against which monitoring will be assessed. Otherwise, the data gathered to date (both at submission and Examination phases) will form the baseline.
- 12.1.4 Each of the grassland areas in the operational site will be subject to condition assessment monitoring.

12.2 Grassland Monitoring

- 12.2.1 Monitoring data for grasslands will be collected using presence/absence point counts (1 m x 1 m) for positive and negative indicator species. DAFOR recording will be carried out for the different grassland habitat types.
- 12.2.2 A minimum of five quadrats will be undertaken for each habitat parcel. Each quadrat will assess the percentage cover of grasses, herbs, bryophytes and bare ground. In tall grassland where the grasses form a canopy the cover of herb species will be assessed below the canopy.
- 12.2.3 The relevant Statutory Metric Condition Assessment Sheet (Natural England, 2023) will be filled out per habitat parcel within the site, where appropriate utilising quadrat data. The habitat condition score will subsequently be calculated and compared with the BNG Target.
- 12.2.4 The monitoring data will be supported by set photo points to provide a visual record of each of the grassland areas, their structure and cover.

12.3 Ditches

- 12.3.1 A ditch Statutory Metric Condition Assessment Sheet (Natural England, 2023) will be filled out per parcel of ditch within the site. The habitat condition score will subsequently be calculated and compared with the BNG Target.
- 12.3.2 The monitoring data will be supported by set photo points to provide a visual record of each of the ditches, their structure and cover.

12.4 Other Broadleaved Woodland

- 12.4.1 A woodland Statutory Metric Condition Assessment Sheet (Natural England, 2023) will be filled out per parcel of Woodland within the site. The habitat condition score will subsequently be calculated and compared with the BNG Target.
- 12.4.2 The monitoring data will be supported by set photo points to provide a visual record of each of the woodlands, their structure and cover.

12.5 Scattered Trees

- 12.5.1 An individual trees Statutory Metric Condition Assessment Sheet (Natural England, 2023) will be filled out per parcel of scattered trees within the site. The habitat condition score will subsequently be calculated and compared with the BNG Target.
- 12.5.2 Native trees and shrubs planted within the Biodiversity Area will be monitored to assess the establishment and growth of the different planted species. Any failures will be recorded along with negative factors requiring remedial measures.
- 12.5.3 The monitoring data will be supported by set photo points to provide a visual record of each of the woodlands, their structure and cover.

12.6 Hedgerows

- 12.6.1 A hedgerow Statutory Metric Condition Assessment Sheet (Natural England, 2023) will be filled out for each hedgerow within the site. The habitat condition score will subsequently be calculated and compared with the BNG Target.
- 12.6.2 The new and retained hedgerows will be monitored to assess their condition and the establishment of newly planted areas. Any failed areas of planting will be recorded along with negative factors requiring remedial measures such as excessive grazing/browsing pressure.
- 12.6.3 The monitoring data will be supported by set photo points to provide a visual record of each of the woodlands, their structure and cover.

12.7 Ponds

- 12.7.1 A pond Statutory Metric Condition Assessment Sheet (Natural England, 2023) will be filled out for each pond within the site. The habitat condition score will subsequently be calculated and compared with the BNG Target.
- 12.7.2 Each of the new pond within the Biodiversity Area will be monitored to assess the condition of the habitat and its value for wildlife. A visual inspection will be undertaken from the pond margin.
- 12.7.3 The monitoring data will be supported by set photo points to provide a visual record of each of the woodlands, their structure and cover.

12.8 Great Crested Newt

- 12.8.1 The monitoring programme will assess GCN populations in habitat creation and enhancement areas.
- 12.8.2 The retention and enhancement of terrestrial habitats suitable for GCN should result in the continued use of breeding ponds near the Site by great crested newt and may furthermore increase the habitat extent and connectivity throughout the site.
- 12.8.3 Surveys will be undertaken between mid-March – June through eDNA and population size class assessment surveys.
- 12.8.4 Monitoring will be undertaken in Years 1, 2, 4, 6 and 10, after which it will continue at five-year intervals until decommissioning of the Site.
- 12.8.5 The suitability of each pond will be assessed using Habitat Suitability Index (HSI) assessment.
- 12.8.6 The findings of the monitoring will be presented in a letter or short report supported by plans and photographs indicating locations of all GCN populations.
- 12.8.7 The monitoring will confirm the continued presence or likely absence of GCN populations in the operational site and nearby pond and the suitability of the ponds to support GCN.
- 12.8.8 Hibernacula will be inspected yearly to ensure they are in an appropriate condition.

12.9 Badger

- 12.9.1 Monitoring for Badgers will form part of the monitoring of the site, the extent of which will be informed by the DCO and protected species licensing mitigation.

12.10 Dormice

- 12.10.1 Monitoring for Dormice will form part of the monitoring of the site, the extent of which will be informed by the DCO and protected species licensing mitigation. However, will involve monitoring of dormouse as a result of Project hedgerow works, undertaken between April – November.

12.11 Wintering and Breeding Birds

- 12.11.1 Monitoring for wintering and breeding birds will form part of the monitoring of the site.
- 12.11.2 Wintering bird survey methodologies will be based on a transect / 'walkover' methodology as outlined in Bibby *et al.* (2000) and Gilbert *et al.* (1998) . Three visits will be undertaken between October and March to be spaced as one visit in each of October/November, December/January and February/March. During each visit, the transects to be walked around the site will broadly follow those set out in the baseline Wintering Bird Survey Report at ES Appendix 9.10 [APP-159] as far as operational site limitations allow.

Similarly, the methodologies with respect to bird recording set out in ES Appendix 9.10 will be followed with respect to the methodology of recording birds, both those seen and heard (directly into ArcGIS base using ESRI software or equivalent), using standard British Trust for Ornithology (BTO) one and two-letter species codes. Analysis of data will follow also follow the same methodology set out in Section 2.3 of ES Appendix 9.10.

- 12.11.3 Breeding bird surveys will Follow standard territory (registration) mapping methodology as detailed in Bibby *et al.* (2000) and Gilbert *et al.* (1998) with three visits completed between March and June (ideally one in March/April, one in May and one in June). During each visit, the transects and areas to be walked around the site will broadly follow those set out in the baseline Breeding Bird Survey Report at ES Appendix 9.9 [APP-158] as far as operational site limitations allow. The survey route will be walked at a slow pace in order to locate and identify all individual birds. Visits will be undertaken early in the morning, finishing before midday but not conducted prior to sunrise, to avoid the dawn chorus. On each visit, registrations will be recorded directly into ESRI GIS software (or equivalent) loaded on handheld tablet devices. Post survey territory analysis methodology will follow that set out in Section 2.1.14 *et seq.* of ES Appendix 9.9 using groups of bird registrations to plot territory positions.
- 12.11.4 Bird boxes and skylark plots will be check annually in autumn/winter, to ensure boxes and plots are in a serviceable condition.
- 12.11.5 In addition, in order to track any collisions of birds with panels, monitoring and recording of any bird carcasses found across the Project site will form part of the daily site management activities. Reporting of data arising from this monitoring will be included within bird monitoring reports.

12.12 Bats

- 12.12.1 Static monitoring of key flight lines within the Project site will be undertaken in Spring, Summer and Autumn. Full details of which will be set out in Bat Technical Note.
- 12.12.2 Additional monitoring will be undertaken on the Bechstein's colonies present within the Central Site Area woodlands. This is because acoustic data alone will not separate *Myotis* species adequately. Therefore, simultaneous colony counts of the Bechstein's colonies will be carried out to ascertain whether the landscape changes have affected their use of resources. These colony counts will be undertaken pre-maternity and post-maternity in year 1 and year 6 following construction.
- 12.12.3 Bat boxes will be check annually in autumn/winter by a suitably-licensed ecologist, to ensure boxes are in a serviceable condition.

12.13 Invertebrates

- 12.13.1 Insect hotels will be checked annually, to ensure hives are in a serviceable condition and to record species present. Deadwood piles will also be checked and any species present recorded.

- 12.13.2 In addition, a walk-over of habitat created in Tier A bat buffers will be undertaken by an experienced entomologist to record the broad diversity of invertebrate abundance present, including larger species such as Odonata.

12.14 Control of invasive species

- 12.14.1 No invasive species are currently present on Site. However, any invasive, exotic species of plants identified during monitoring will be removed. Three non-native invasive bank species associated with watercourses will require particular attention. These are:
- Japanese knotweed *Fallopia japonica*.
 - Giant hogweed *Heracleum mantegazzianum*.
 - Himalayan balsam *Impatiens glandulifera*.
- 12.14.2 Other species that could occur include *Cotoneaster spp.* and *Robinia spp.*
- 12.14.3 All these species are listed in Schedule 9 of the Wildlife and Countryside Act 1981 (as amended) making it an offence to 'plant or otherwise cause to grow in the wild'.
- 12.14.4 Where monitoring reveals a significant infestation of the non-native invasive plants named above, consideration should be given to herbicide control. Only herbicides containing the active ingredient glyphosate are currently approved for use in or near water.
- 12.14.5 Agreement must be obtained from the Environment Agency to use herbicides in or near water. Spraying needs to be carried out at the optimal time for the problem species.
- 12.14.6 When seeking agreement from the Environment Agency a range of information will need to be supplied including details of the site, the problem species, any nature conservation sites, downstream users and fish presence, along with details of the herbicide to be used and how it will be applied.
- 12.14.7 Anyone who uses herbicides in or near water must have the necessary skills, knowledge and qualifications. They must hold a relevant National Proficiency Test Certificate (NPTC) certificate of competence, which must be supplied with the application. The NPTC certificate must be for applying herbicides in or near water.
- 12.14.8 In addition to the above, monitoring of the River Evenlode for the presence of American Mink will be established. This will be undertaken in consultation with other land managers along the River Evenlode corridor. Detail of mink monitoring will be included in the relevant LEMP for the river.

13 MONITORING PROGRAMME

13.1.1 All monitoring (except where noted) will be undertaken in Years 1, 2, 4, 6 and 10, followed by once every 5 years for the lifetime of the Project. The proposed monitoring programme is set out in Table 13.1, commitment numbers are in accordance with Table 9.8.1 of ES Chapter 9 [EN010147/APP/6.3].

Table 13.1: Programme of Habitat and Species Monitoring

Commitment Number	Feature	Measures adopted	How measures will be secured
9.12	Habitats: Grasslands, Ditches, Woodlands, Scattered Trees, Hedgerows and Ponds.	Statutory Metric Condition Assessment and photo points. May to September.	Requirement in DCO.
9.13	Great Crested Newt	Monitoring of GCN populations in on site waterbodies and GCN habitat creation and enhancement areas. Hibernacula Inspections. Mid-March – June.	Requirement in DCO. Monitoring as part of protected species licence.
9.14	Badger	Monitoring of badger populations if any setts require closure. Winter.	Requirement in DCO. Monitoring as part of protected species licence (if required).
9.15	Dormouse	Monitoring of dormouse as a result of hedgerow works. April – November.	Requirement in DCO. Monitoring as part of protected species licence.
9.12	Breeding Birds	Three monitoring visits of breeding bird populations. Bird box inspections. March – August.	Requirement in DCO.
9.12	Wintering Birds	Three monitoring visits of wintering bird populations. Mid-October – mid-March.	Requirement in DCO.
9.12	Bats	Static monitoring of key flight lines, full details to be set out in Bat Technical Note. Spring, Summer and Autumn.	Requirement in DCO. Monitoring as part of protected species licence (if required).
9.12	Invertebrates	Insect hotel and deadwood pile inspections. Any month. Walkover in June.	Requirement in DCO.

14 WORKMANSHIP

- 14.1.1 Where, and to the extent that, materials and workmanship are not fully specified in this oLEMP they are to be suitable for the purposes of the stated objectives and in accordance with good horticultural practice or the current British Standard with reference to:
- BS 3998: Recommendations for tree work.
 - BS 4428: Code of practice for general landscape operations.
 - BS 7370: Grounds maintenance, referencing specifically Parts 1 to 5 of this standard as follows:
 - Part 1: Recommendations for establishing and managing grounds maintenance organisations and for design considerations related to maintenance.
 - Part 2: Maintenance of hard areas.
 - Part 3: Maintenance of amenity and functional turf (other than sports turf).
 - Part 4: Maintenance of soft landscape (other than amenity turf).
 - Part 5: Maintenance of Water and Wetland Areas.

15 RESPONSIBILITIES FOR MANAGEMENT AND TIMESCALES

- 15.1.1 Following the end of the establishment period and satisfactory completion of any landscape defects or necessary reinstatement works all maintenance and management of soft landscape areas which form part of the Project within the Project site will be undertaken by a suitably qualified landscape management contractor on behalf of the Applicant.
- 15.1.2 Ongoing management and maintenance of the site will incorporate landscape proposals within the Project to provide a comprehensive approach going forward.
- 15.1.3 Areas for management include;
- Zone 1: Northern Estate Farmland
 - Zone 2: Evenlode Corridor
 - Zone 3: Valley Farmland
 - Zone 4: Wooded Estate Farmland
 - Zone 5: Southern Zone
- 15.1.4 The landscape maintenance works will be periodically reviewed by a suitably qualified and experienced person to ensure that the landscape management operations are being completed in accordance with the approved relevant LEMP. During the first two years of establishment, the works will be inspected three times (during the growing season) and thereafter the works will be inspected annually. Inspection reports will be made available to the local authority.
- 15.1.5 The management and maintenance strategies set out in the oLEMP to be carried into the detailed LEMPs for each part of the authorised development will be undertaken for the lifetime of the Project.

16 SCHEDULE OF MAINTENANCE

16.1.1 The following section sets out the key maintenance operations for each new habitat type.

16.2 Native Woodland and Buffer Planting

16.2.1 Key maintenance operations will include:

- Formative pruning as necessary to establish a dense screen / buffer.
- Selective pruning of native woodland planting and buffer planting as required where shrubs / trees start to encroach on footpaths/cycleways, highways, water courses and bodies and buildings, maintaining a full planted screen at all times along boundaries, where appropriate.
- Remedial pruning/tree surgery as necessary in accordance with BS:3998 or to remove growth obstructing paths, carriageways, lighting and signs.

16.3 Individual and Hedgerow Trees

16.3.1 Where an individual tree subject to a TPO must be removed to facilitate part of the scheme and the local authority requires replacement, a new tree of equivalent species and ultimate size will be agreed with the LPA. Planted in the same place or as near as reasonably practicable to the position of the removed tree, subject to operational requirements. Replacement planting for individual trees will utilise Standard tree stock (8-10cm girth) and will be planted in the next planting season following removal. The final species and planting location will be agreed in advance with the LPA.

16.3.2 Key maintenance operations will include:

- Checking, adjusting and replacing tree support systems and guarding as necessary during establishment period.
- Removing redundant tree support systems once trees are fully established.
- Formative pruning as necessary to establish a well-balanced and healthy crown appropriate to the species and purpose, along with the removal of any dead, dying or diseased limbs.
- Remedial pruning/tree surgery as necessary in accordance with BS:3998 or to remove growth obstructing paths, carriageways, lighting and signs.
- Replacing any dead, dying or diseased plants in the following planting season with stock of similar specification to the original for the initial five-year establishment period.

16.4 Meadow Grass

16.4.1 Key maintenance operations will include:

- Reseeding and repairing all areas which fail to establish or become damaged in the following planting season as required.

- Management to be via conservation grazing. However, if necessary, areas will be mechanically cut once annually (early autumn - once the wildflowers have flowered and seeded) to a sward height of 100 mm.
- Removal of all arisings from site. Composting on site from arisings will be permissible, where appropriate.
- Spot weed-killing to control coarse ruderal or pernicious weed species as necessary.
- Reseeding/rejuvenating areas of poor establishment and thinning sward as required.

16.5 General

Plant nutrients

- 16.5.1 Plant nutrients / fertiliser will not be used across the Project site other than in the Education Area, if required.

Watering

- 16.5.2 Watering will only be carried out to maintain the health and continued vigour of the trees and shrubs until fully established. Water usage will be controlled and monitored at all times to avoid waste.
- 16.5.3 Areas which become prone to waterlogging, where this is not ecologically desirable, will be alleviated suitably, and/or drainage added as required.

Pesticides Generally

- 16.5.4 Pesticides will not be used except in very exceptional circumstances.
- 16.5.5 Should they be necessary, all pesticides will be selected from the current list of approved chemicals and applied in strict accordance with the Control of Pesticide Regulations 1986 (as amended 1997) and other related Acts and Regulations.
- 16.5.6 The approval of the Environment Agency will be required when applying a pesticide to or within 3 metres of any watercourse.
- 16.5.7 Appropriate action will only be taken if a severe infestation occurs. If a problem persists over a number of years, consider changing the plant species concerned to one less vulnerable to infestation.

Existing Mature Trees

- 16.5.8 To ensure all mature trees are in a safe and healthy condition all existing mature trees will be inspected annually by a qualified and experienced arboriculturist. All survey results will be recorded and passed to the site operator. Additional inspections will be tasked after storms / periods of bad weather.

- 16.5.9 Complete pruning / dead wooding recommended by the above survey will be carried out. All such works will accord with BS3998:2010. This includes ensuring that nesting birds or roosting bats were not disturbed.

Litter Control

- 16.5.10 Collection and removing of litter from all hard and soft areas will be undertaken at regular intervals.
- 16.5.11 After each litter control visit all hard and soft landscaped area will be completely litter free.

Monitoring and Inspection

- 16.5.12 Routine monitoring will be provided to ensure that maintenance tasks are being undertaken as programmed and to review their effectiveness and make adjustments as necessary.
- 16.5.13 Appropriate action will be taken to deal with damage and debris arising from storms, flood events, heavy snowfall and / or interference.
- 16.5.14 Personnel completing inspections will be suitably qualified and experienced in monitoring landscape works (such as a Member of the Landscape Institute).
- 16.5.15 Ecological monitoring will take place to review the condition of habitats and the Evenlode corridor (including a river condition assessment). This will ensure that the assumptions with respect to biodiversity net gain were being achieved. Such monitoring will comprise UK Habitats Condition Assessments of the newly created habitats within the Project site at yearly intervals.
- 16.5.16 Further monitoring will be required by licences for specific species including GCN, badgers and dormice. Monitoring for bats will also be undertaken.
- 16.5.17 This monitoring will be undertaken using fixed point photography. If significant negative change occurs, appropriate mitigation will be implemented.

Ecological Stewardship

- 16.5.18 It is an offence to disturb nesting wild birds and roosting bats including their nests/roosts under the Wildlife and Countryside Act 1981 (as amended).
- 16.5.19 Clearance, pruning and trimming operations during the bird nesting period, generally March to August inclusive will be avoided where practicable. If operations have to take place during this time, then a qualified Ecologist will check in advance that there are no birds nesting in the planned area of operation.
- 16.5.20 Cutting of meadow / rank grasses, should this be required, will be carried out in early autumn to prevent disturbance to reptile or ground nesting birds.
- 16.5.21 Disturbance and clearance/thinning of vegetation within water bodies and wetland areas will be completed in the winter months and any material removed left by the bank side for a week to allow insects and mammals to return to the pond or swale before removal.

- 16.5.22 Opportunities for further enhancement following routine maintenance and management will be encouraged, such as creating brash and/or log piles to offer refuge to wildlife.
- 16.5.23 Reference to the site's specific ecological considerations will be taken into account before carrying out any routine maintenance and management operations, consulting a suitability qualified ecologist in case of doubt.

Biosecurity

- 16.5.24 The threat of pests and diseases that affect plant species is widely recognised, and all landscape practitioners have a responsibility to detect, monitor and control pests and diseases at every stage of a plant's life from growing, specifying, handling, managing and destroying plants.
- 16.5.25 Wherever practicable all planting will be specified to be of local provenance and from reputable sources, with supporting paperwork provided and retained at each stage to demonstrate an auditable supply chain.
- 16.5.26 Reference will be made regularly to updates from DEFRA and the Forestry Commission with any recommendations or warnings strictly adhered to, to prevent further spread of disease including reporting known outbreaks as appropriate.
- 16.5.27 Good plant husbandry will be implemented on site to prevent further spread of diseases, particularly where symptoms or confirmed outbreaks of disease has occurred.

17 MANAGEMENT REVIEWS AND ACTIONS

- 17.1.1 The review will consider the extent to which the objectives, aims and BNG targets have been achieved through the ongoing implementation of management actions over the lifetime of the Site.
- 17.1.2 The effectiveness of the prescriptions, methods and timing of works will be assessed based on the status of habitats.
- 17.1.3 The assessments will consider trends in habitat change, drawing upon the results of previous years and the known the pre-development habitat conditions with the implementation period.
- 17.1.4 The monitoring results will be compiled in monitoring reports that will be provided to the relevant planning authority, as set out in Section 12.1.2 above, no later than four months following the completion of the relevant survey season. The report will highlight positive and negative outcomes for biodiversity, nature conservation, species and BNG targets. The monitoring reports will highlight any unforeseen changes to factors influencing management decisions and actions and the continued relevance of each of the management prescriptions.
- 17.1.5 Any shortfalls in achieving the management objectives will be highlighted such as adverse habitat changes and trends or habitat establishment failures or damage. The monitoring reports would include additional management actions in the work schedules to address unexpected changes such as the colonisation of invasive non-native plants, actions to repair the adverse effects of prolonged drought or where a current management specification is not effective.
- 17.1.6 Examples of remedial measures that may become appropriate are listed in Table 11.1 below. The need for the implementation of any of these would be triggered by monitoring. This Management Plan will be a working document with flexibility allowing the management prescriptions to be tailored to achieving the biodiversity, aims, objectives and targets.

Table 17.1: Example of Modifications to Management and Remedial Measures

Feature	Example of Management Modifications and Remedial Measures
Habitats	
Grasslands	Supplemental grassland and wildflower seeding Removal of shrub species, bracken and/or non-native invasives Changes in frequency and timing of grass cutting Changes to levels of grazing stock or timing of grazing Removal of areas of coarse grass and nutrient rich topsoil and reseed native grass mix into prepared subsoil
Ditches	Supplemental planting of emergent, submerged and floating-leaved plants Removal of filamentous algae and or duckweed, invasive, overhanging trees/shrubs and Water Framework Directive UKTAG GB High Impact Species List (UKTAG, 2021)
Woodland	Supplemental planting of ground, mid and over-storey species Management of wild, domestic and feral herbivore damage Removal of invasive plant species

Feature	Example of Management Modifications and Remedial Measures
	Creation of open space within woodland
Hedgerows	Selective cutting back of dominant species to promote diversity Adapting cutting regime/method to promote dense growth to ground level and maintained the height of approximately 3m (see paragraph 3.2.1); Supplementary planting to infill gaps and replace losses
Ponds	Removal of any fish if introduced into ponds Removal of any non-native species if introduced into ponds Removal of bulrush, common reed, duckweed or algae Placement of barley hay bale to reduce algae Removal of sediment / leaf litter
New shrub and tree planting	Supplement planting to infill gaps and replace losses Adapting cutting regime/method to promote dense growth to ground level
Species	
Great Crested Newt	Repairs to hibernacula.
Breeding birds	Repairs/ resitting of nest boxes and skylark plots.
Bats	Repairs/ resitting of bat boxes.
Invertebrates	Repairs to insect hotels.

- 17.1.7 The management prescriptions and timing will be reviewed after each monitoring visit with the results of the review set out in the relevant monitoring report. The review will focus on the structure, features and nature conservation value of habitats, to ensure that they remain an important resource for wildlife within the Site and make a contribution to nature conservation value in the local area.
- 17.1.8 The review will inform if changes are required to the future management prescriptions, actions and/or timing. Additional management actions could be added to the work schedule to address unexpected changes or where additional remedial measures not listed in this plan become a requirement. Any necessary remedial measures will be set out in the relevant monitoring report for agreement with the relevant planning authority, in consultation with Natural England (where it relates to bat mitigation areas), BBOWT (where it relates to the Evenlode Corridor) and any other relevant stakeholder, prior to their implementation.
- 17.1.9 Maintaining flexibility will be essential in ensuring that the management prescriptions can be tailored as necessary to achieve the desired outcomes. Many of the management prescriptions during the first five years post construction will be undertaken as required based on the checks and monitoring to assess the habitats condition specified in the plan.

REFERENCES

Bibby, C.J., Burgess, N.D., Hill, D.A., Mustoe, S. and Lambton, S. (2000). Bird Census Techniques. Academic Press, London.

Defra (2026) Nationally significant infrastructure projects: biodiversity gain statement for energy. Online available at <https://assets.publishing.service.gov.uk/media/6a185a1765bc5f798327f4c5/biodiversity-gain-statement-for-energy.pdf> [accessed 16/07/26]

Froglife (2001). Great Crested Newt Conservation Handbook.

Gilbert, G., Gibbons, D.W. and Evans, J. (1998) Bird Monitoring Methods: A Manual of Techniques for UK Key Species. The Royal Society for the Protection of Birds, Sandy, Bedfordshire, England.


Natural England (2023). The Statutory Biodiversity Metric -Technical Annex 1: Condition Assessment Sheets and Methodology.

Natural England (2024). Countryside Stewardship management practices as set out in AB4: Skylark Plots.

UKHab (2023). The UK Habitat Classification System. v2.

UKTAG (2021). Water Framework Directive. Classification of aquatic alien species according to their level of impact.

DRAWINGS

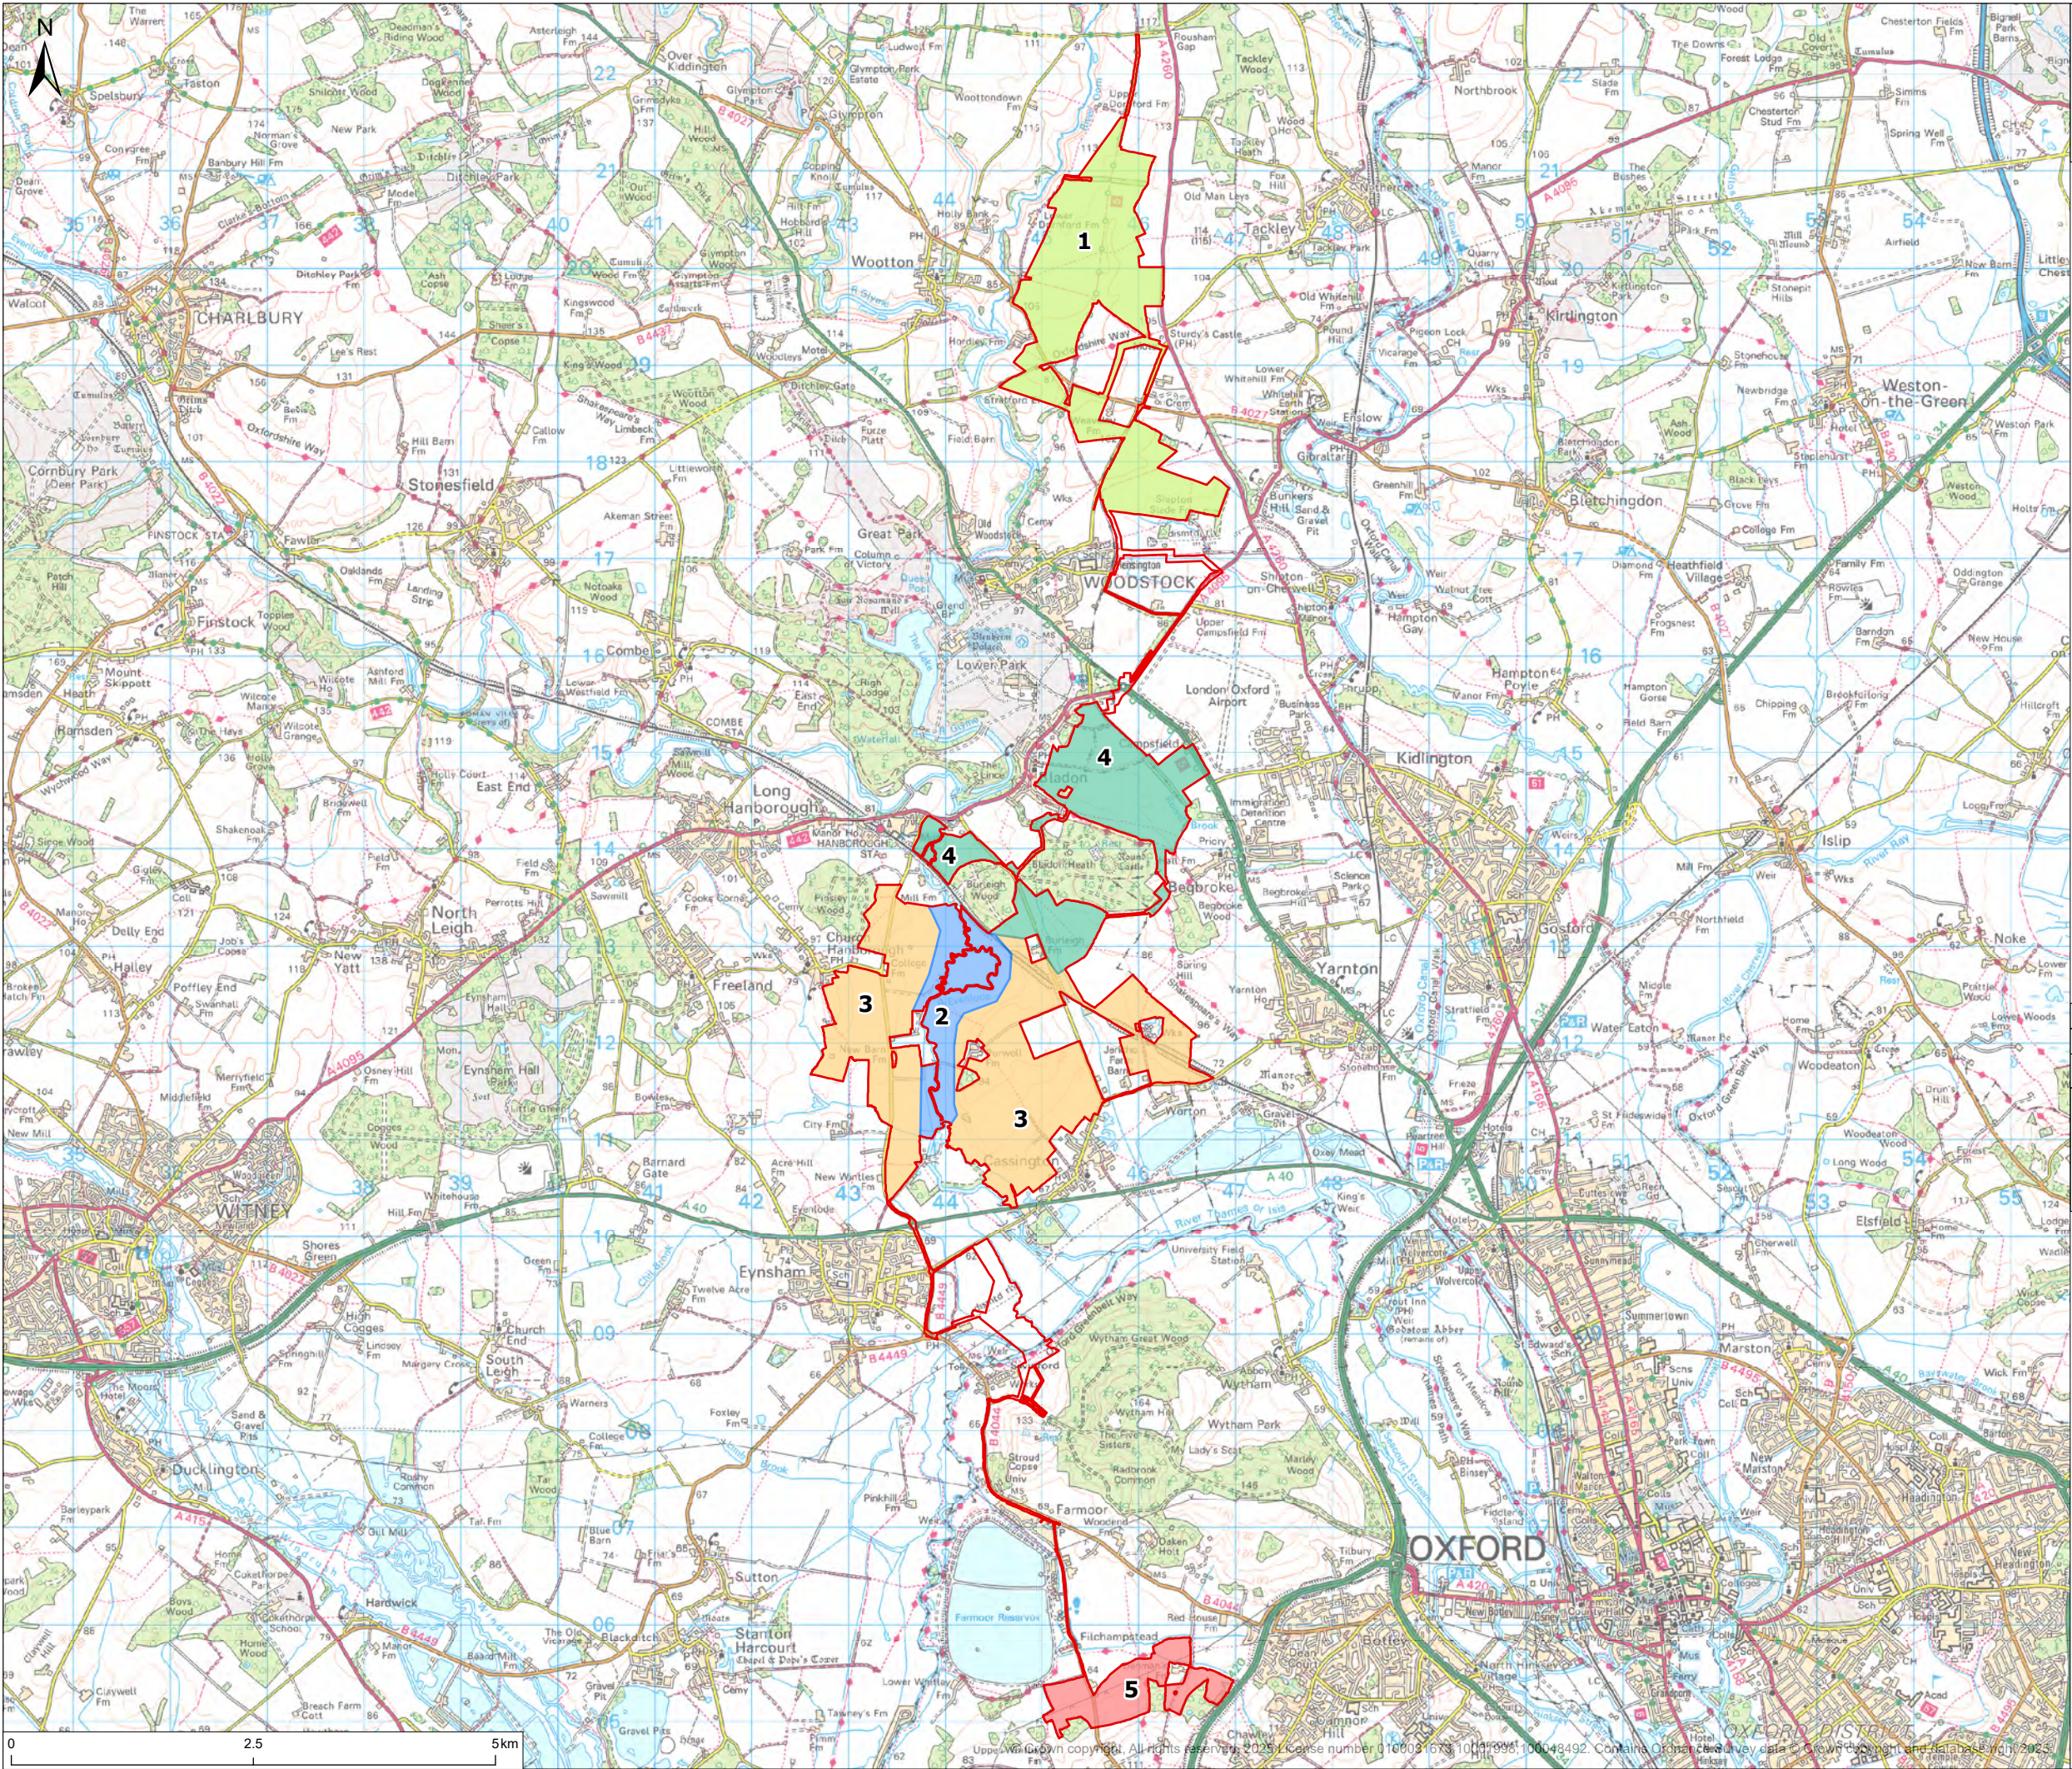



© 2025 RPS Group
Notes
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

Legend

- Order Limits
- Landscape Zones
 - Zone 1: Northern Estate Farmland
 - Zone 2: Evenlode Corridor
 - Zone 3: Valley Farmland
 - Zone 4: Wooded Estate Farmlands
 - Zone 5: Southern Zone

Rev	Description	By	CB	Date
PHOTOVOLT DEVELOPMENT PARTNERS  A TETRA TECH COMPANY				

Client	PVDP		
Project	Botley West Solar Farm		
Title	Landscape Management Zoning Plan		
Status	Drawn By	PM/Checked By	
FINAL	JM	GL	
Drawing Number	Scale @ A3	Date Created	
EN010147/APP/7.6.3	1:65,000	SEP 2025	
Figure Number			Rev
7.6.3.1			-

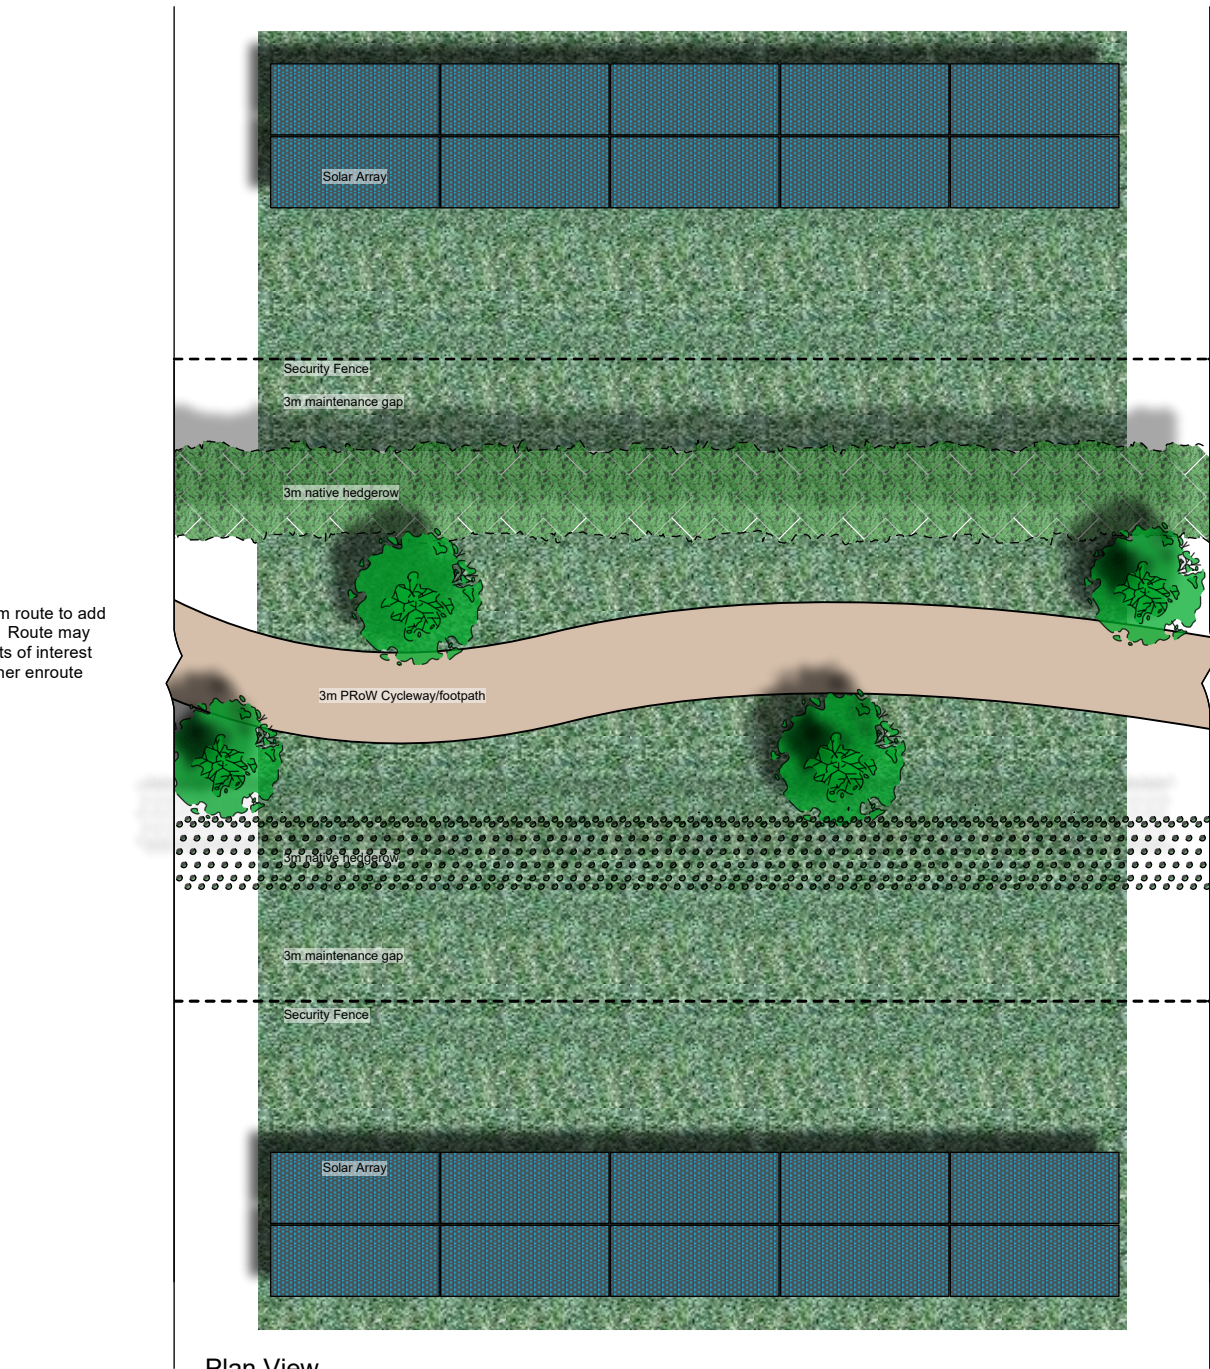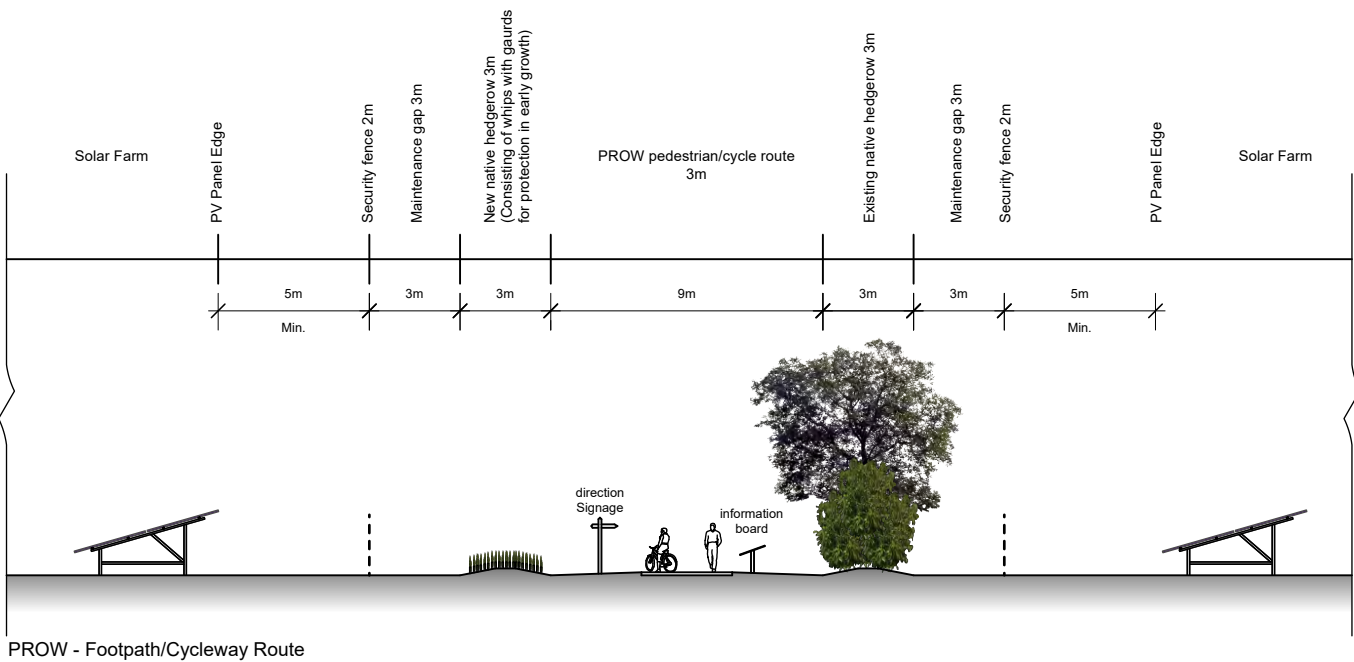

PRoW footpath/cycleway, meanderingm route to add interest to rather than linear corridor. Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements . This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

FOR PLANNING PURPOSES ONLY.
NOT FOR CONSTRUCTION.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS





MAKING
COMPLEX
EASY


A TETRA TECH COMPANY

Client PVDP


Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath/Cycleway
Year 1

Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024
Figure Number		Rev
7.6.3.2A		-

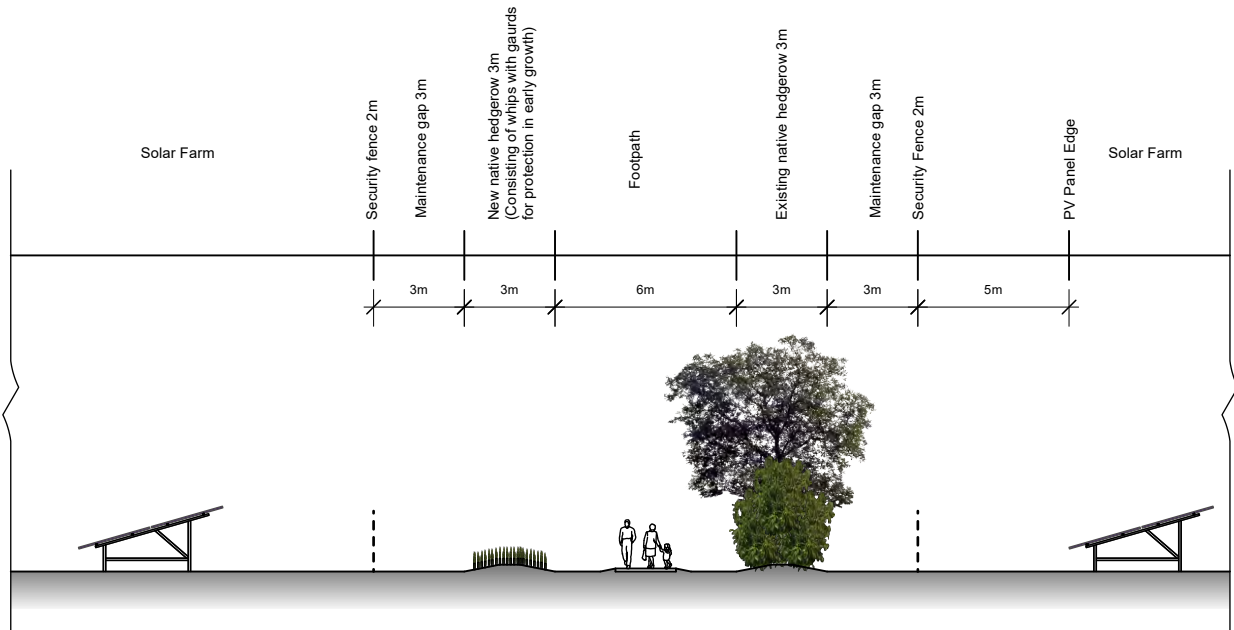

Permissive Footpath Route

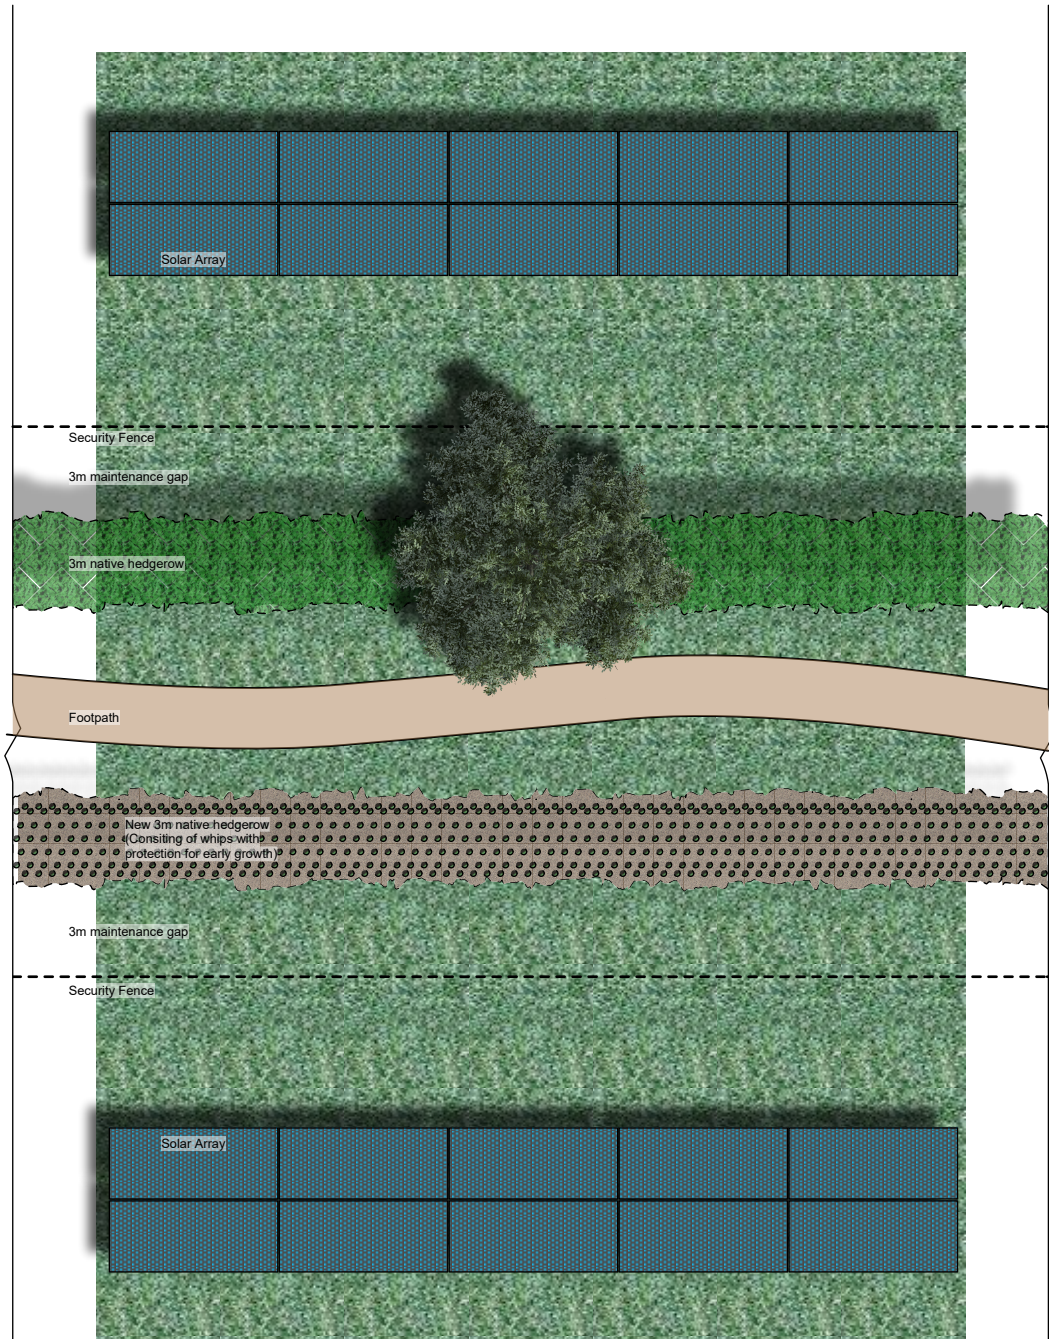

Plan View

Footpath - Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements . This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

FOR PLANNING PURPOSES ONLY.
NOT FOR CONSTRUCTION.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



rps MAKING
COMPLEX
EASY
A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm


Title Indicative greenway plans -
Footpath (1)
Year 1

Status Drawn By PM/Checked by
FINAL AJC JA


Job Ref Scale @ A3 Date Created
EN010147/APP/7.6.3 1:250 Nov 2024

Figure Number Rev
7.6.3.2B -

rpsgroup.com
20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com

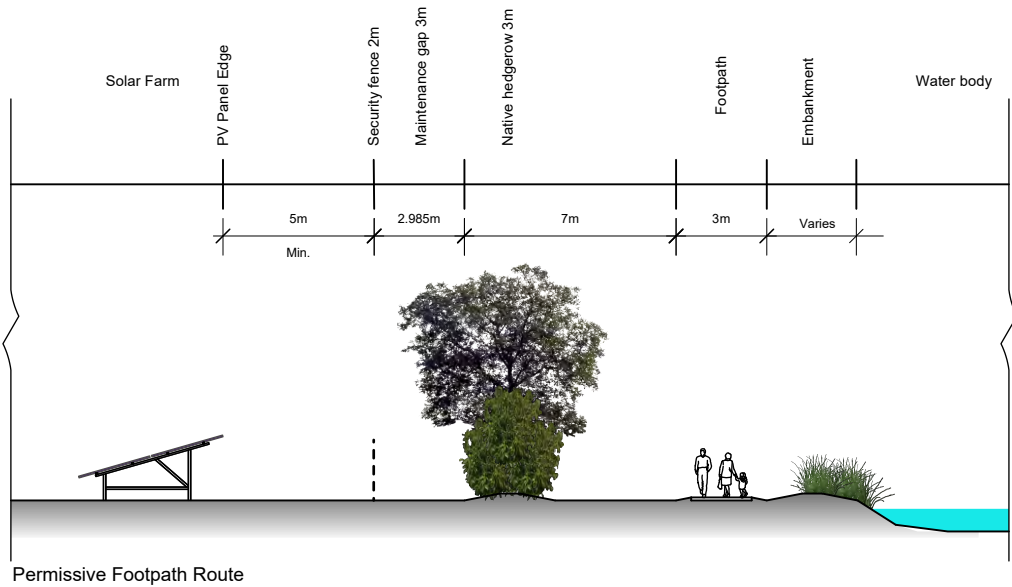

Permissive Footpath Route

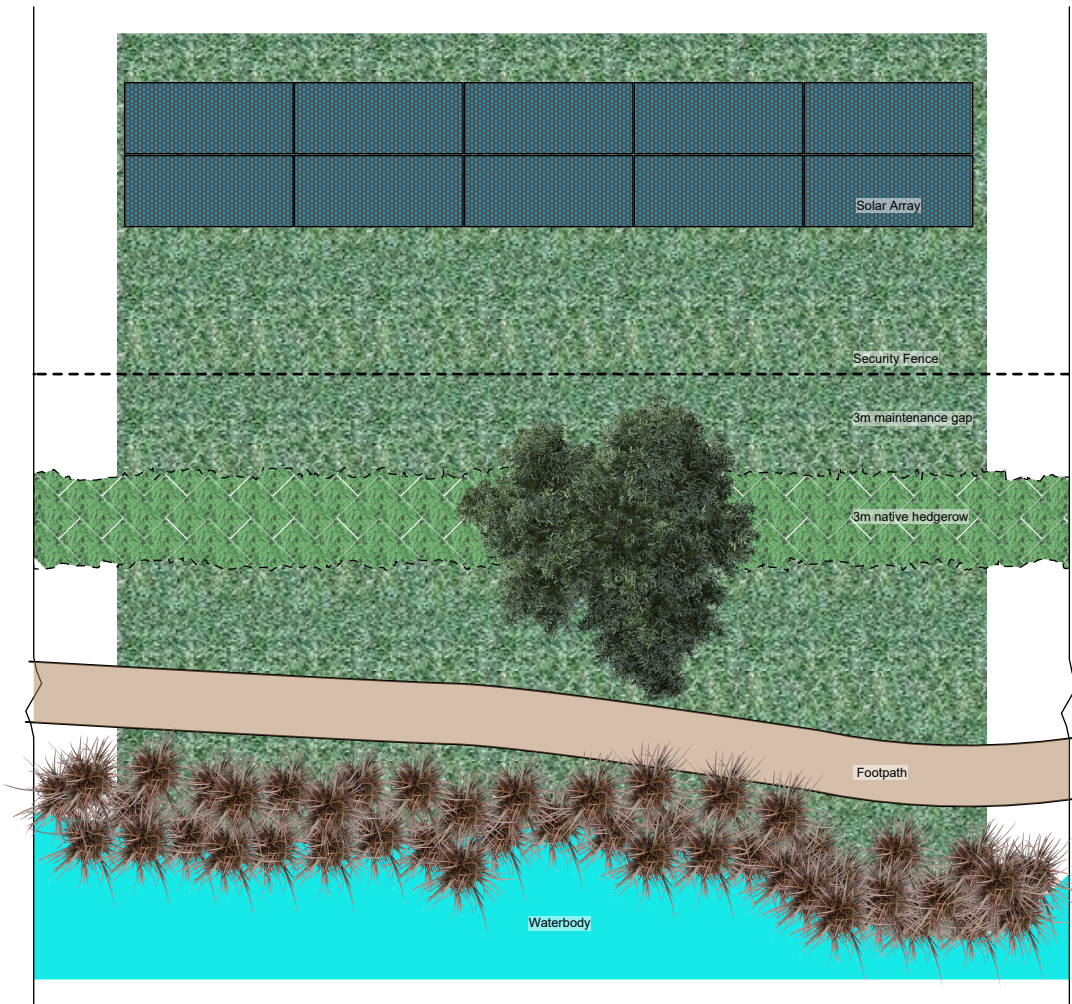

Plan View

Footpath alongside waterbody. Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements . This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS





MAKING
COMPLEX
EASY

A TETRA TECH COMPANY


Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath (2)
Year 1


Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024

Figure Number	Rev
7.6.3.2C	-

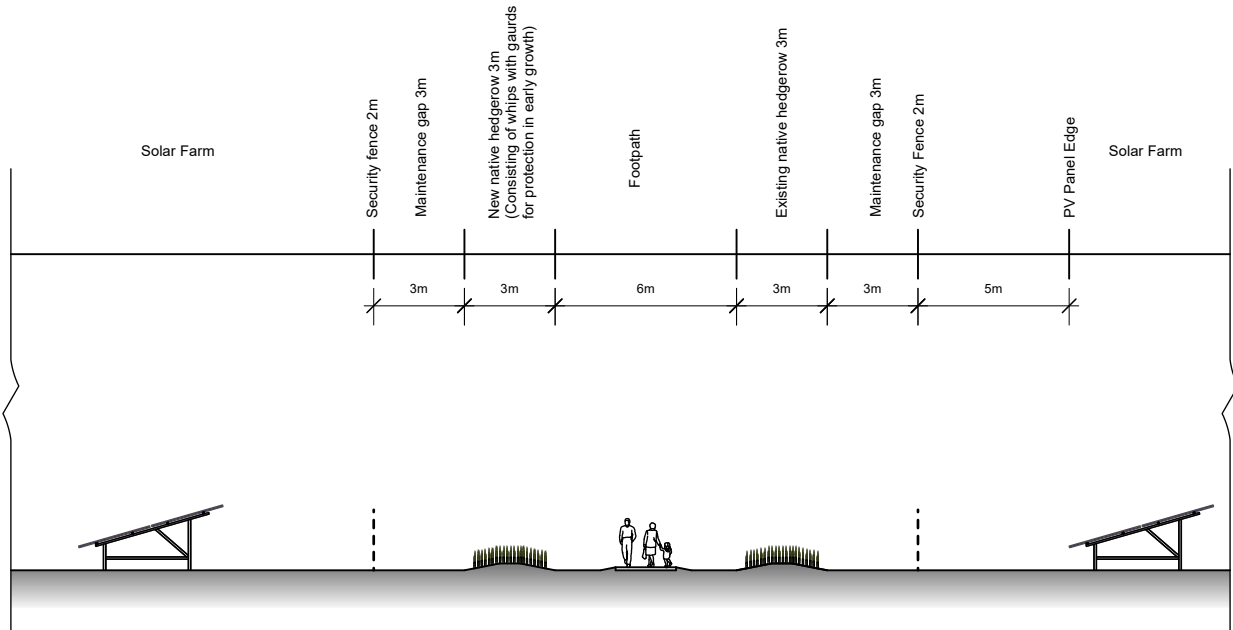

Permissive Footpath Route

Footpath - Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

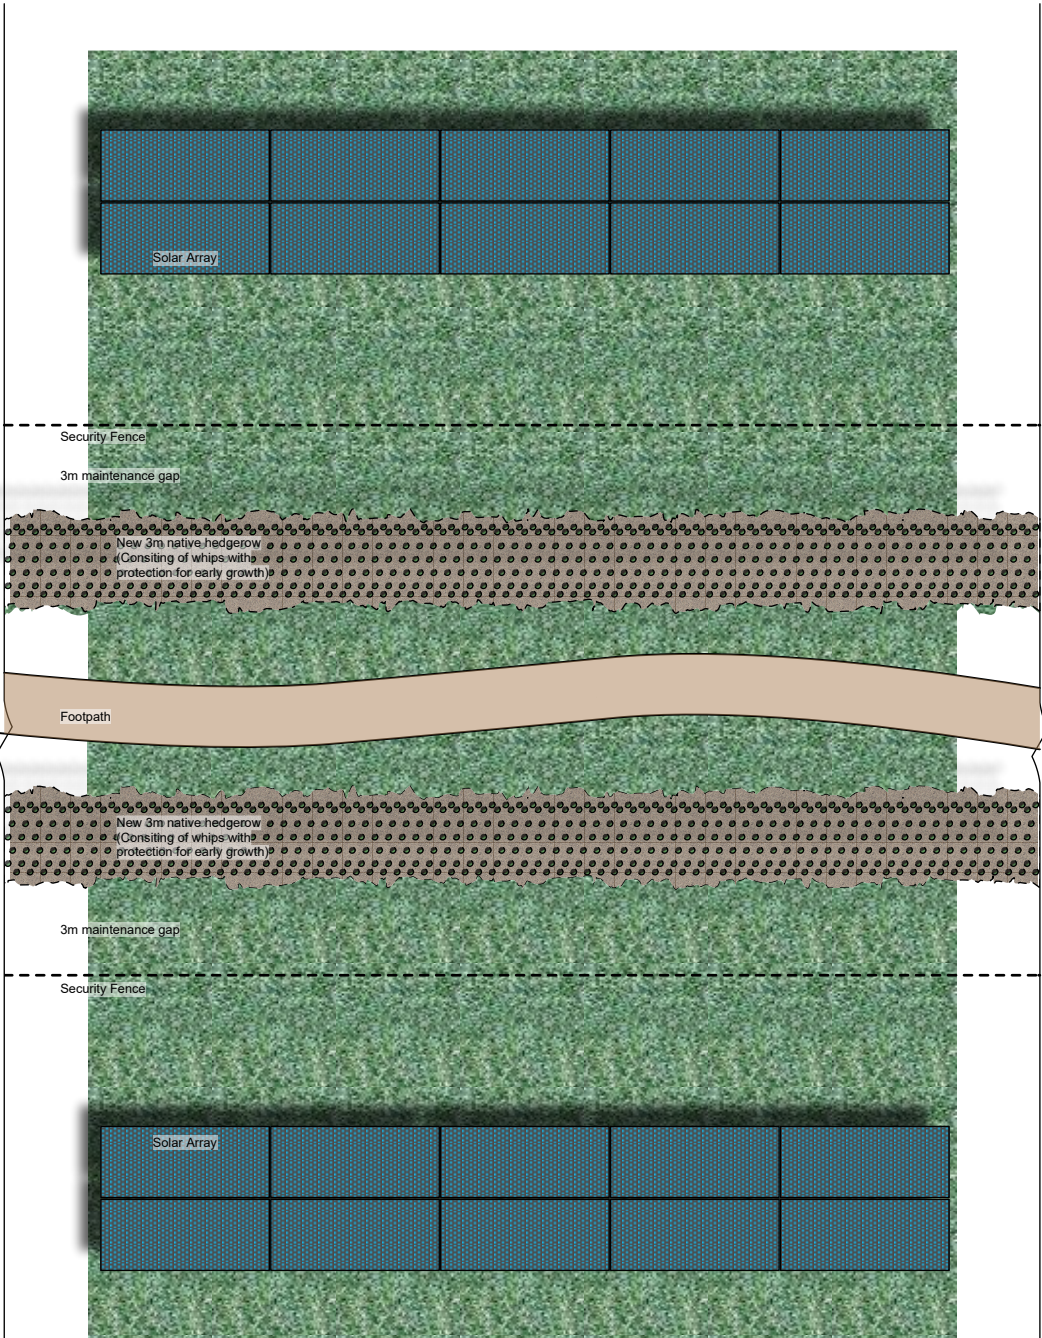

Plan View

- © 2023 RPS Group
- Notes**
- 1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 - 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 - 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 - 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 - 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 - 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date




Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath (3)
Year 1


Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024

Figure Number	Rev
7.6.3.2D	-

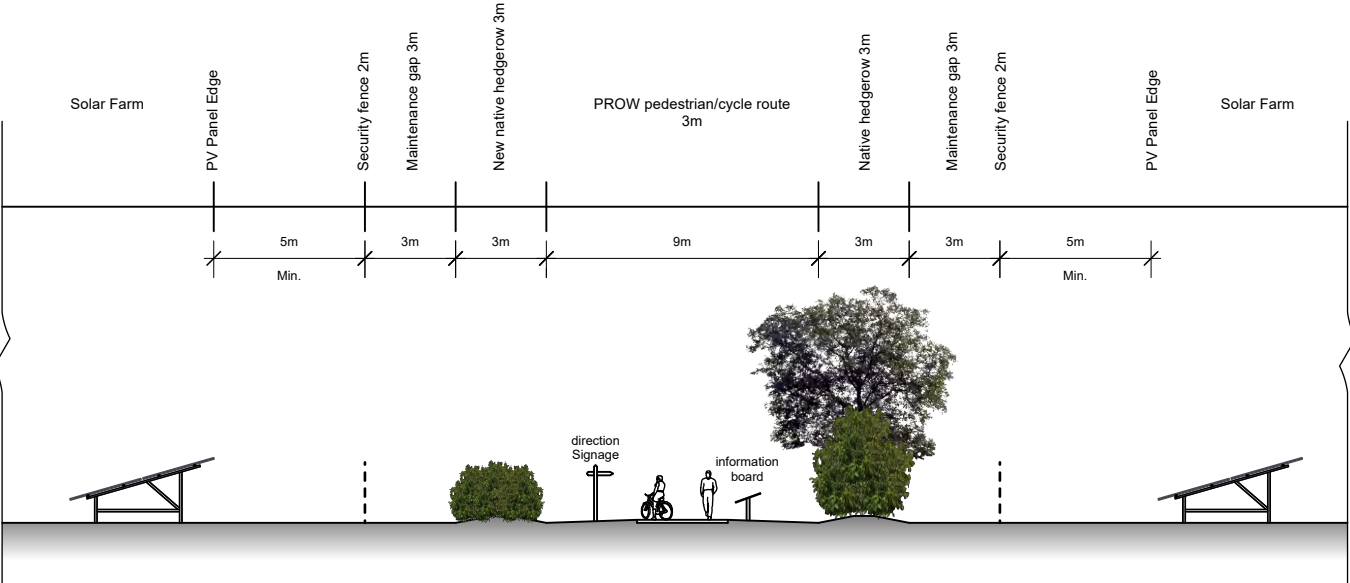

PROW - Footpath/Cycleway Route

PRoW footpath/cycleway, meandering route to add interest to rather than linear corridor. Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

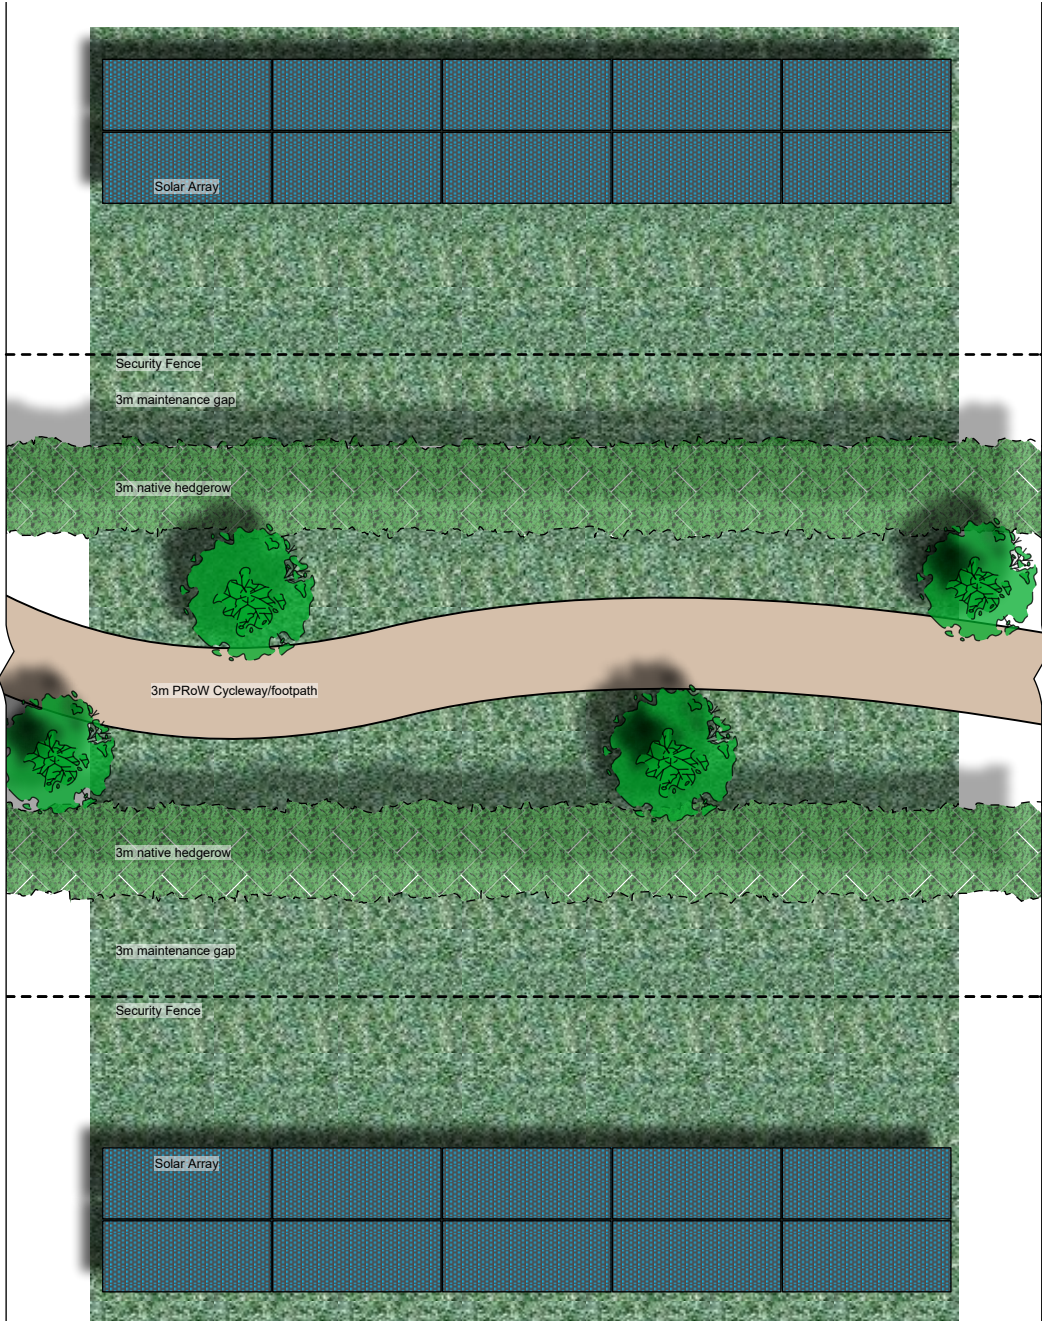

Plan View

- © 2023 RPS Group
- Notes**
- 1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 - 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 - 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 - 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 - 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 - 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS

**MAKING
COMPLEX
EASY**
A TETRA TECH COMPANY


Client PVDP

Project Botley West Solar Farm

Title Indivative greenway plans -
Footpath/Cycleway
Year 5


Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024

Figure Number	Rev
7.6.3.2E	-

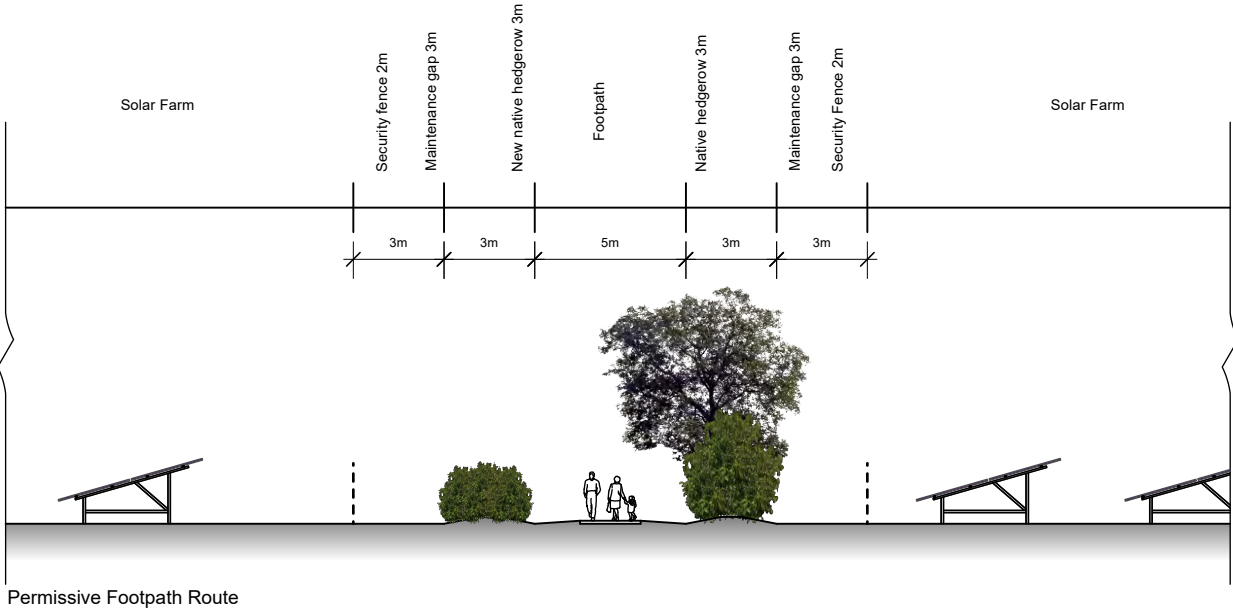

Permissive Footpath Route

Footpath - Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

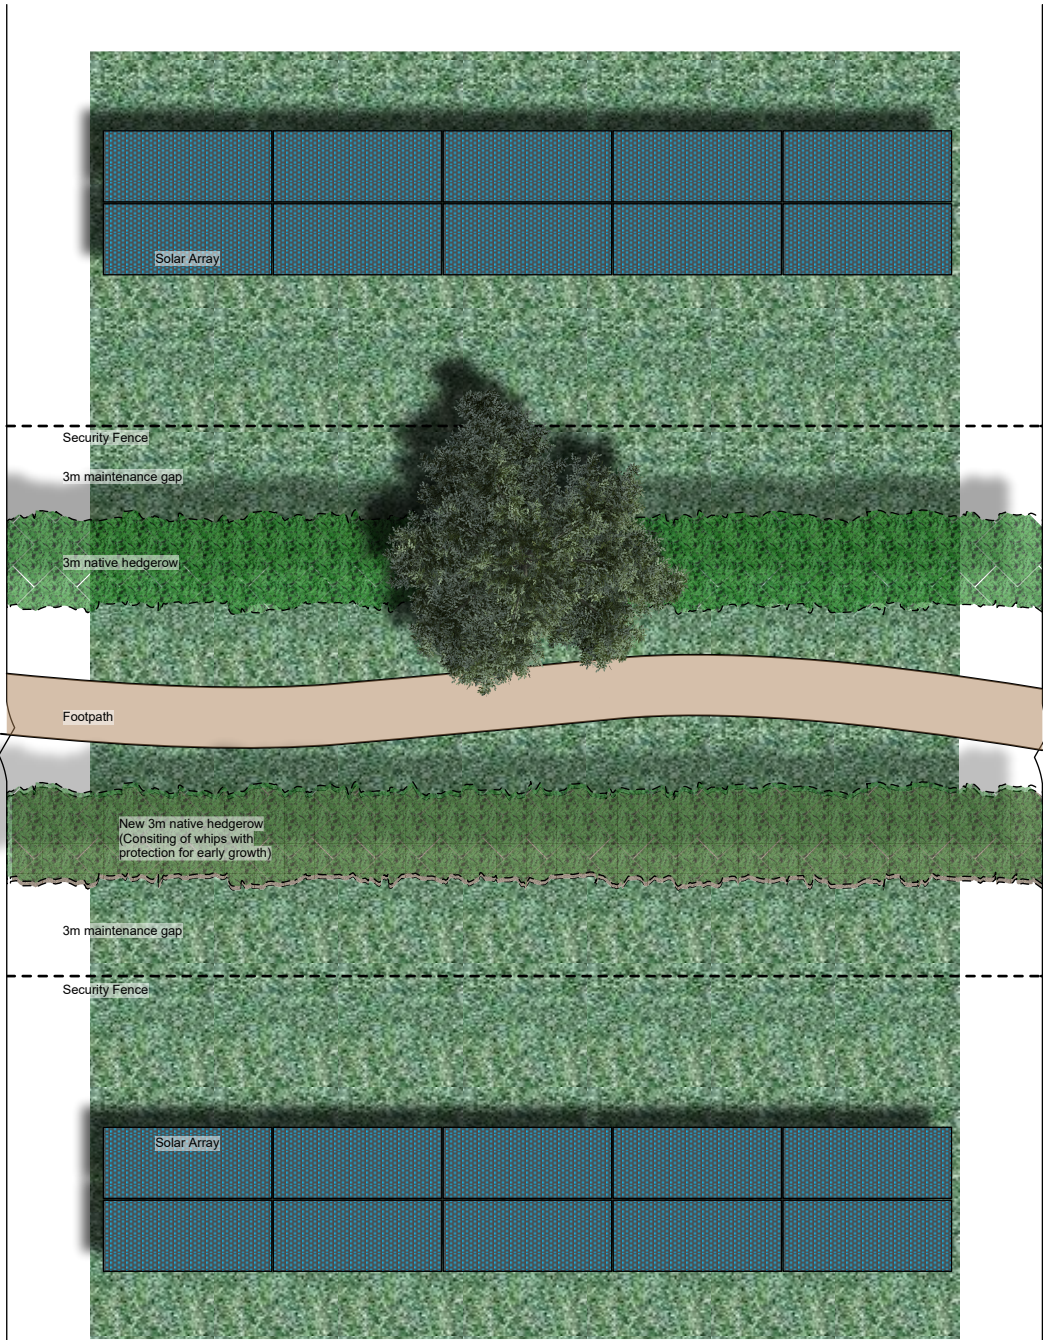

Plan View

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS





MAKING
COMPLEX
EASY


A TETRA TECH COMPANY

Client PVDP


Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath (1)
Year 5

Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024
Figure Number		Rev
7.6.3.2F		-

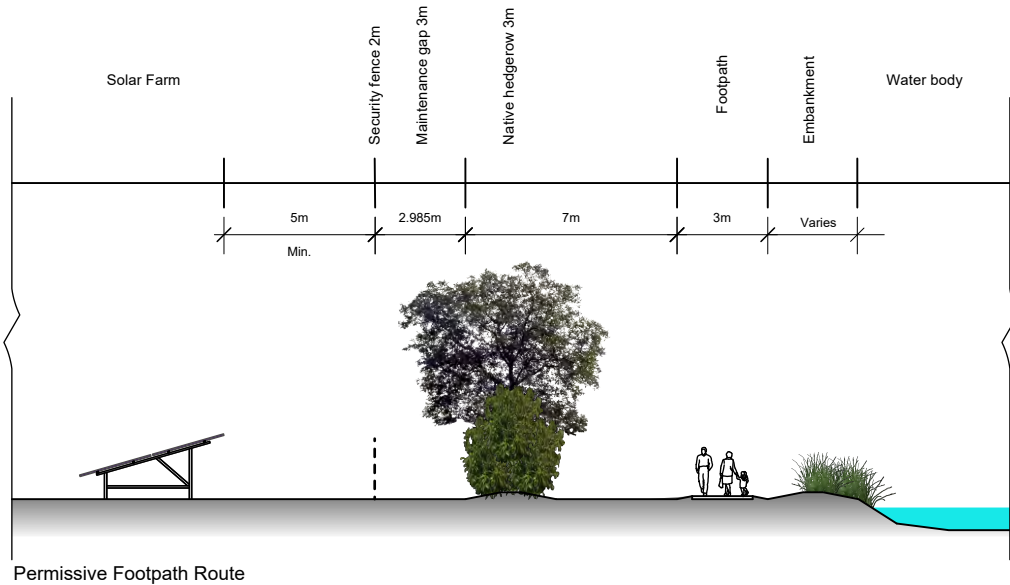

Permissive Footpath Route

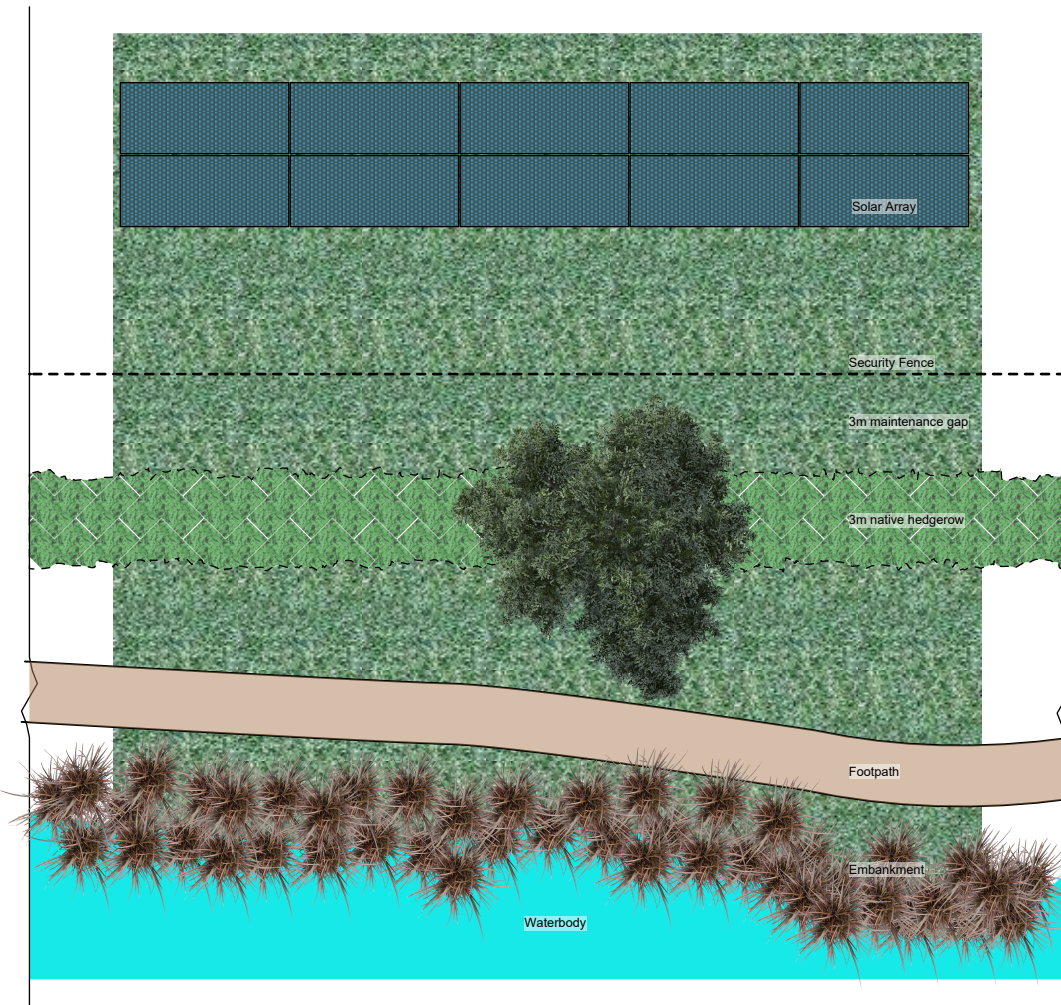

Plan View

Permissive footpath alongside waterbody. Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



MAKING
COMPLEX
EASY

A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm


Title Indicative greenway plans -
Footpath (2)
Year 5

Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024

Figure Number	Rev
7.6.3.2G	-


rpsgroup.com

20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com

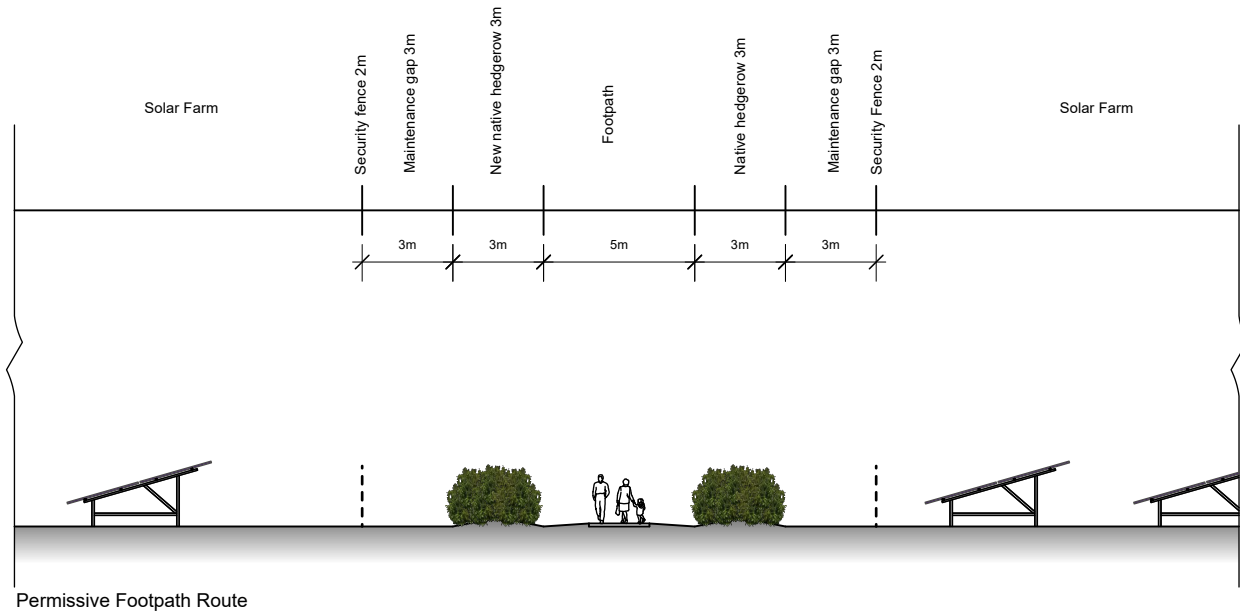

Permissive Footpath Route

Footpath - Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

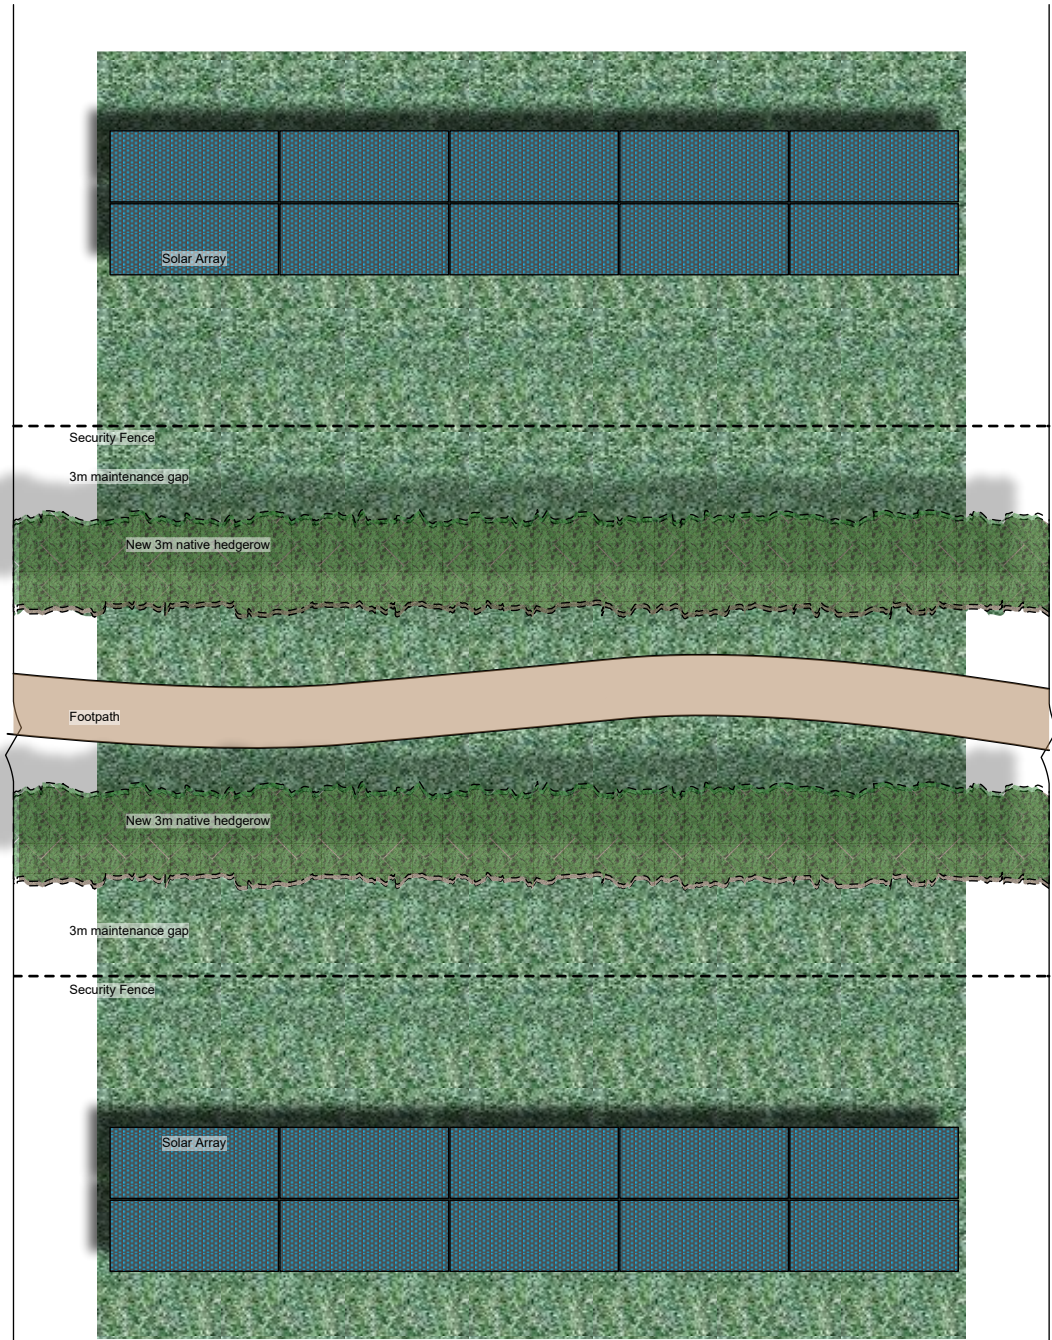

Plan View

© 2023 RPS Group

- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



rps MAKING
COMPLEX
EASY
A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath (3)
Year 5


Status Drawn By PM/Checked by
FINAL AJC JA

Job Ref Scale @ A3 Date Created
EN010147/APP/7.6.3 1:250 Nov 2024


Figure Number Rev
7.6.3.2H -

[rpsgroup.com](https://www.rpsgroup.com)


20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com

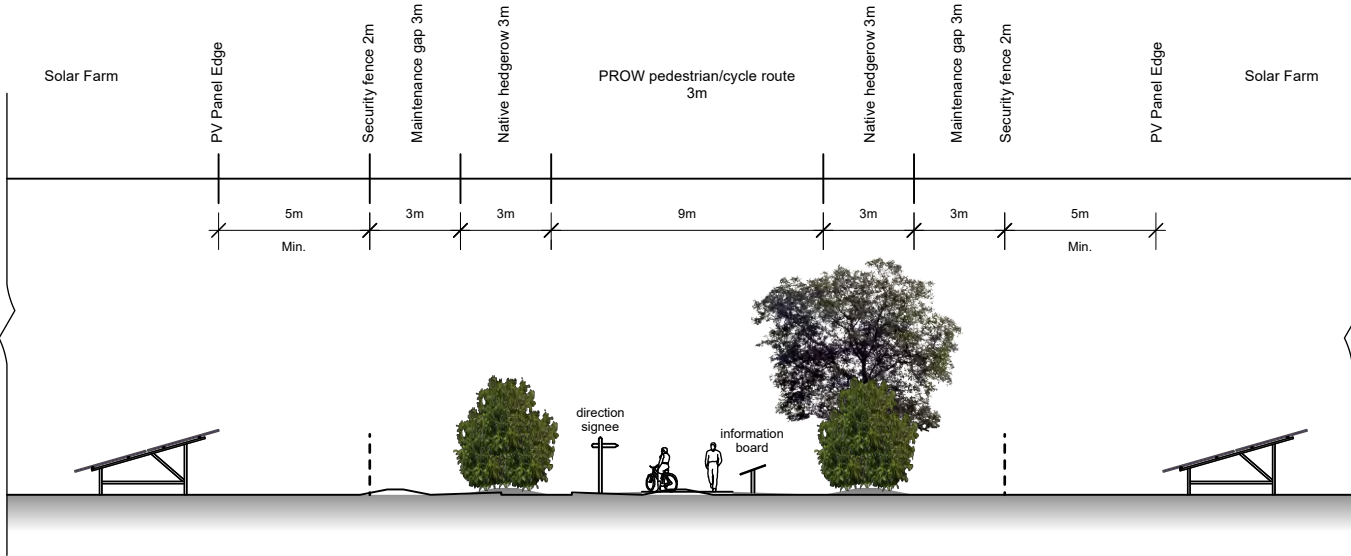

PROW - Footpath/Cycleway Route

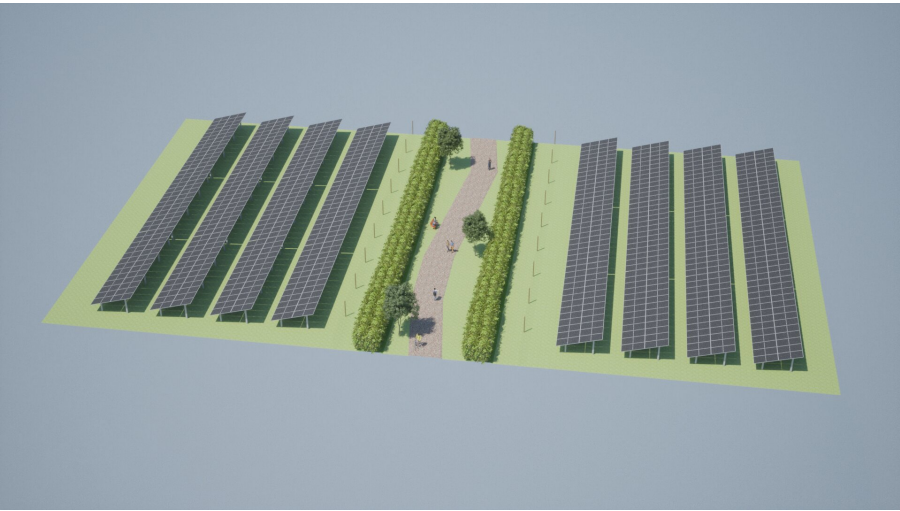

PRoW footpath/cycleway, meandering route to add interest to rather than linear corridor. Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

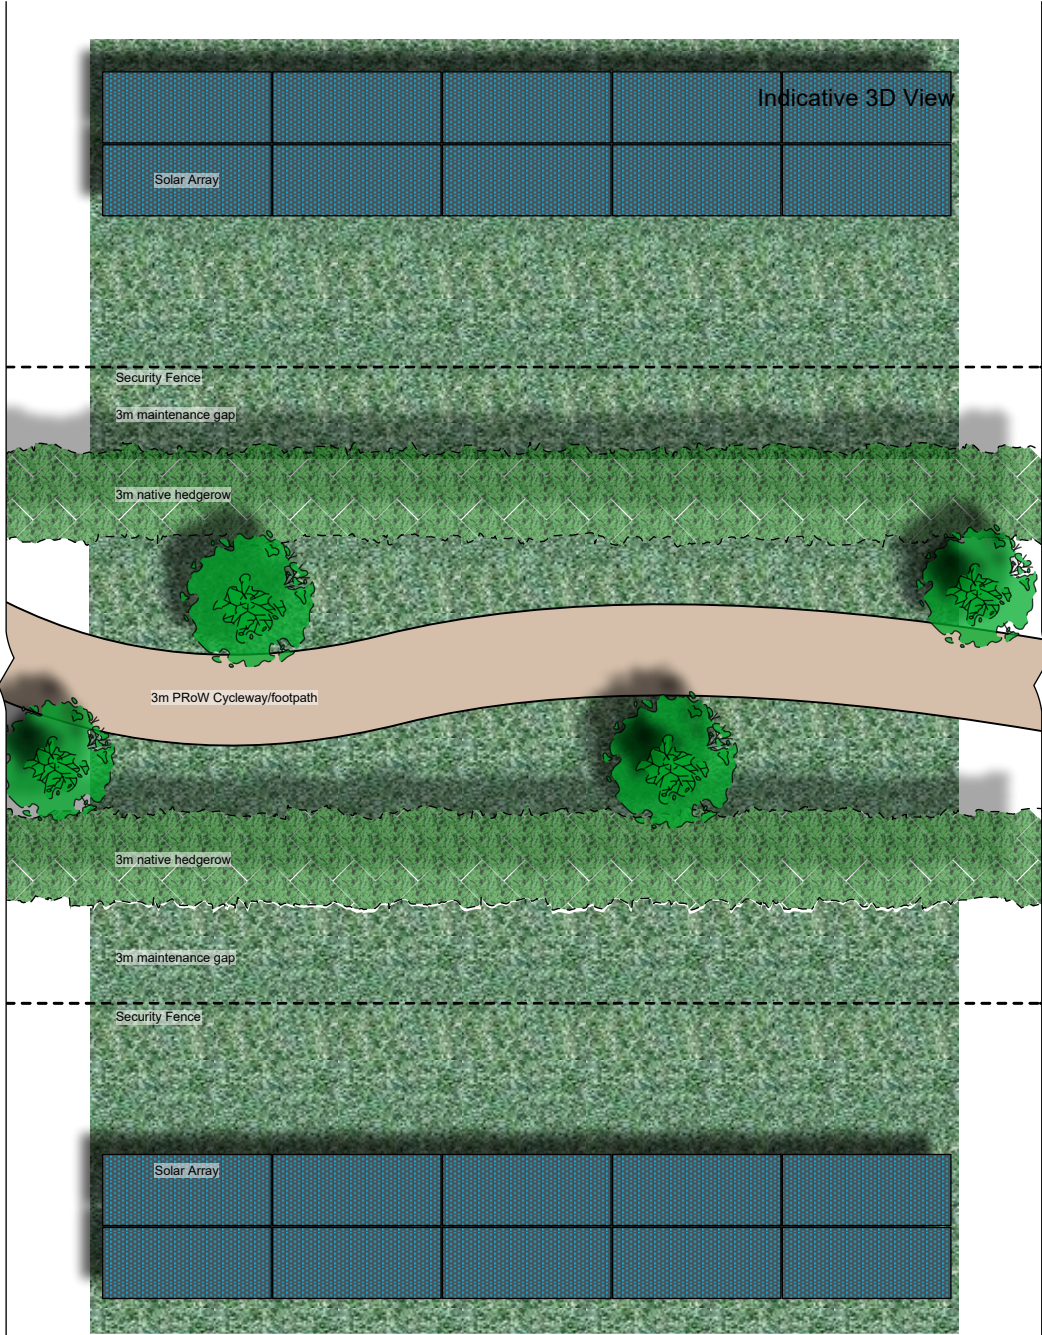

Plan View

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



rps
A TETRA TECH COMPANY

MAKING
COMPLEX
EASY



Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath/Cycleway
Year 15


Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024

Figure Number	Rev
7.6.3.2 I	-

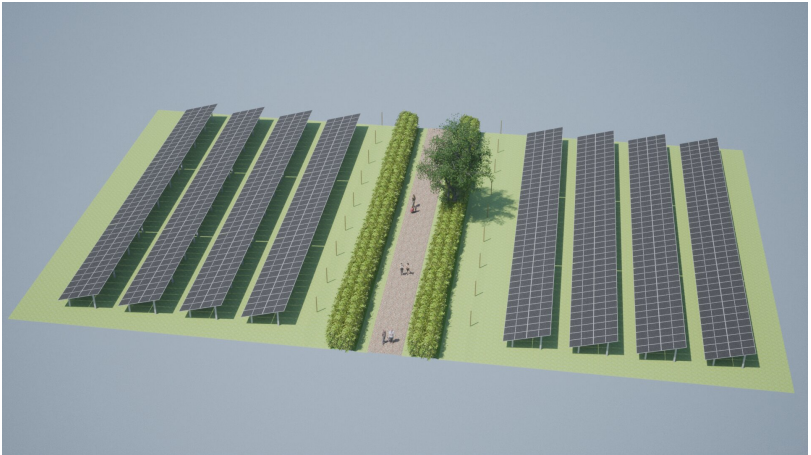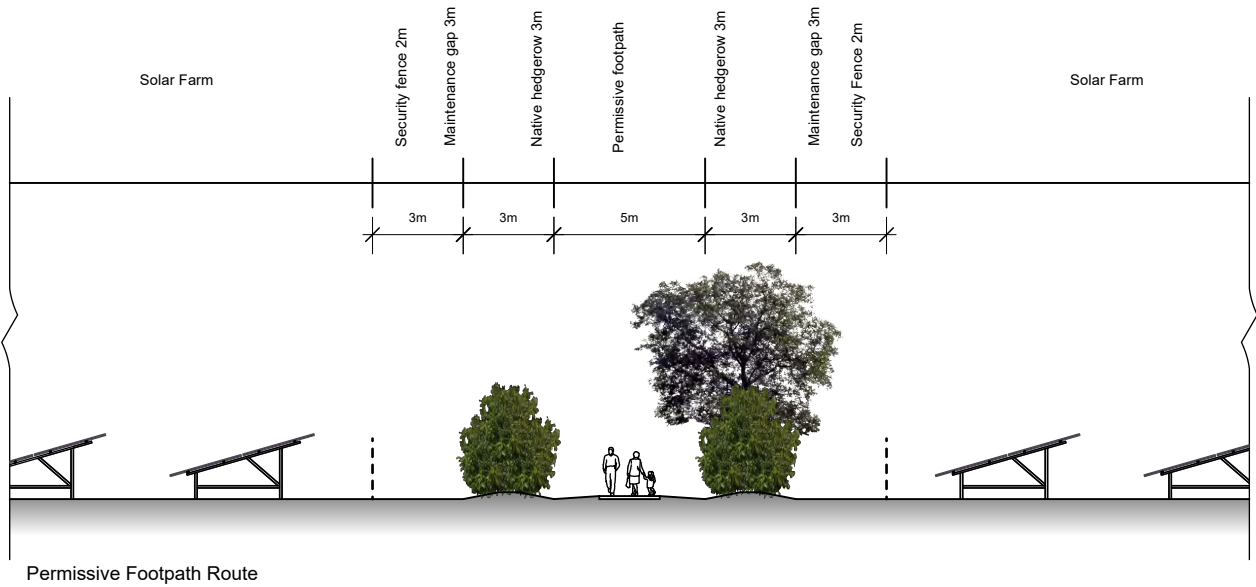

Indicative 3D View

Permissive footpath - Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

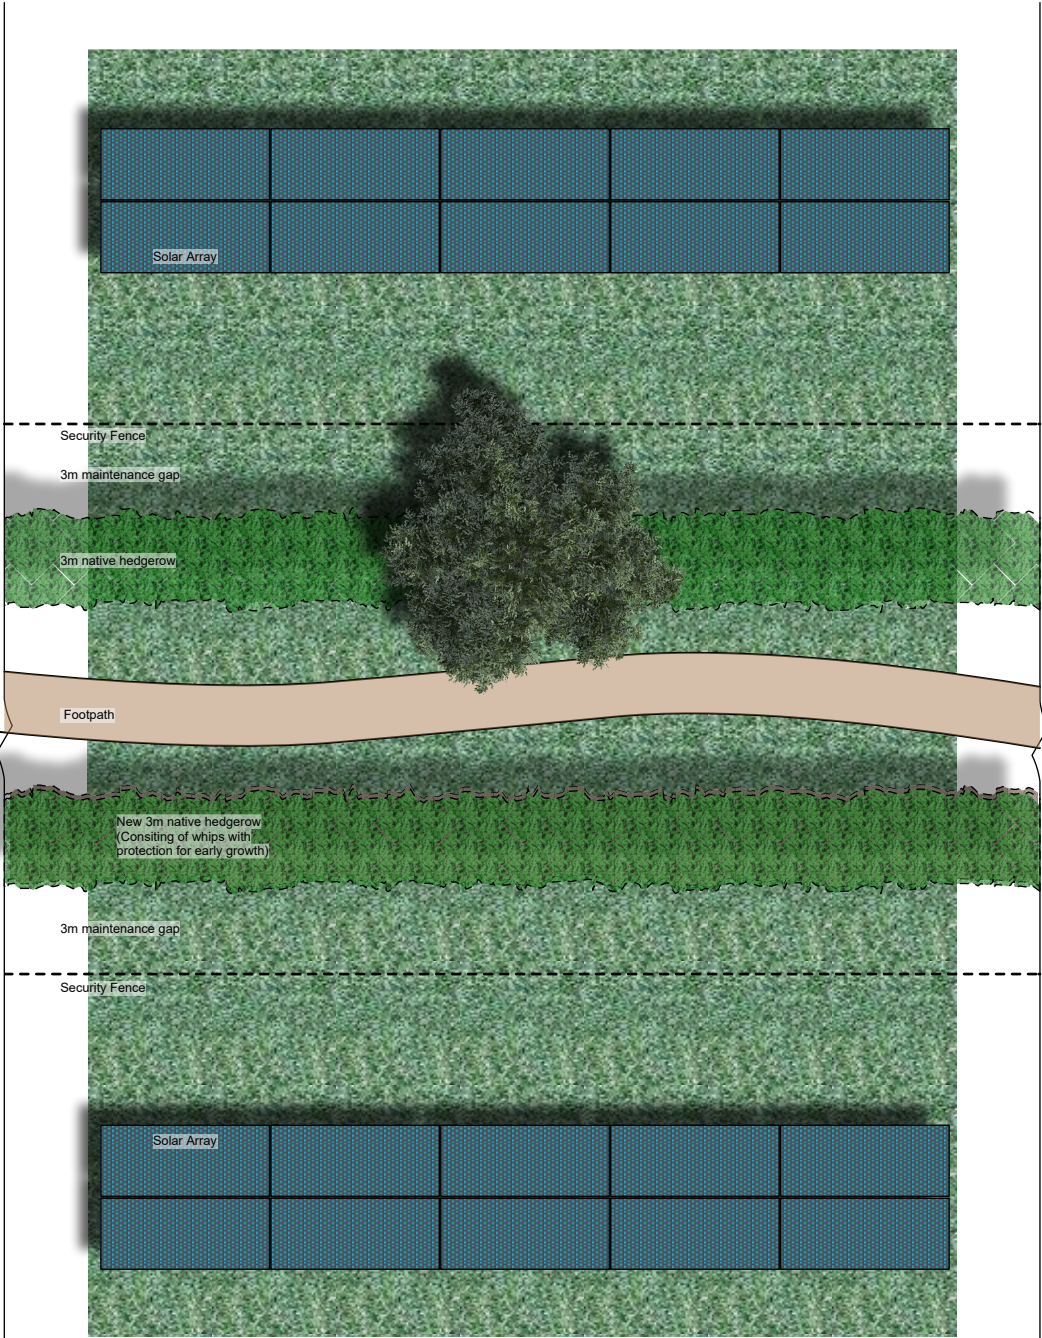

Plan View

© 2023 RPS Group

- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



rps MAKING
COMPLEX
EASY
A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath (1)
Year 15


Status Drawn By PM/Checked by
FINAL AJC JA

Job Ref Scale @ A3 Date Created
EN010147/APP/7.6.3 1:250 Nov 2024

Figure Number Rev
7.6.3.2J -


[rpsgroup.com](https://www.rpsgroup.com)

20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com

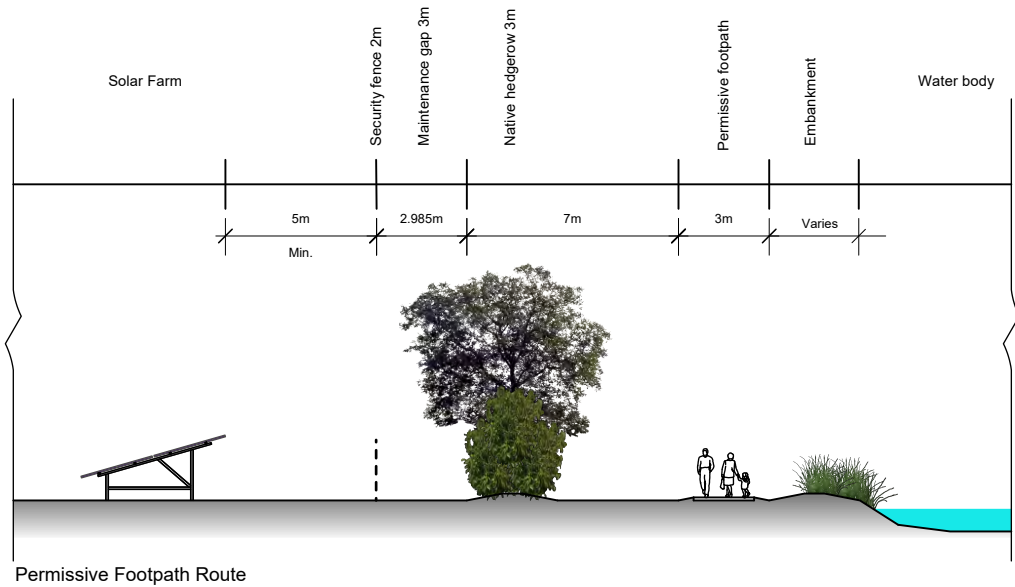

Indicative 3D View

Footpath alongside waterbody.
Route may benefit from directional
signage, points of interest (wildlife
boards for example) and other
enroute activities.

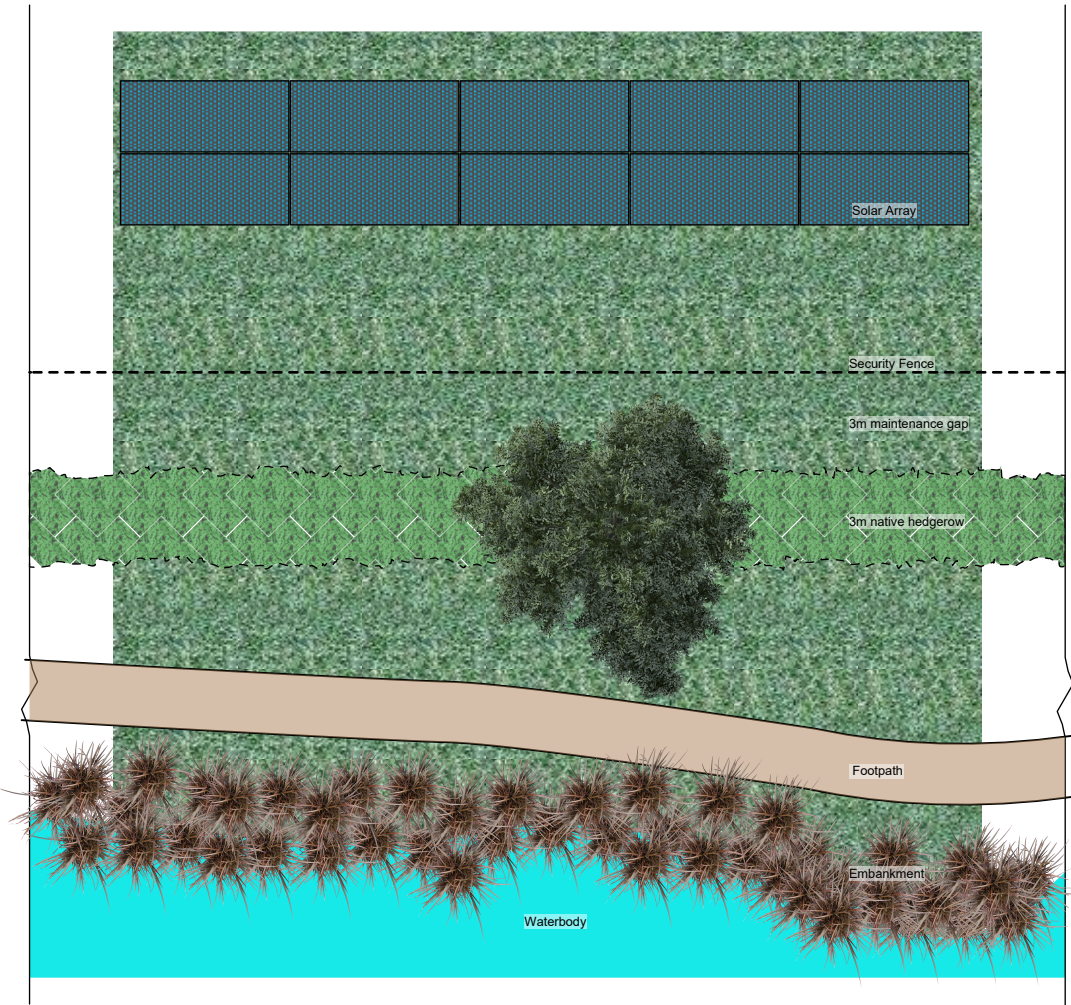

Plan View

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements . This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



MAKING
COMPLEX
EASY


A TETRA TECH COMPANY

Client PVDP


Project Botley West Solar Farm

Title Indicative greenway plans -
Footpath (2)
Year 15

Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024
Figure Number		Rev
7.6.3.2K		-

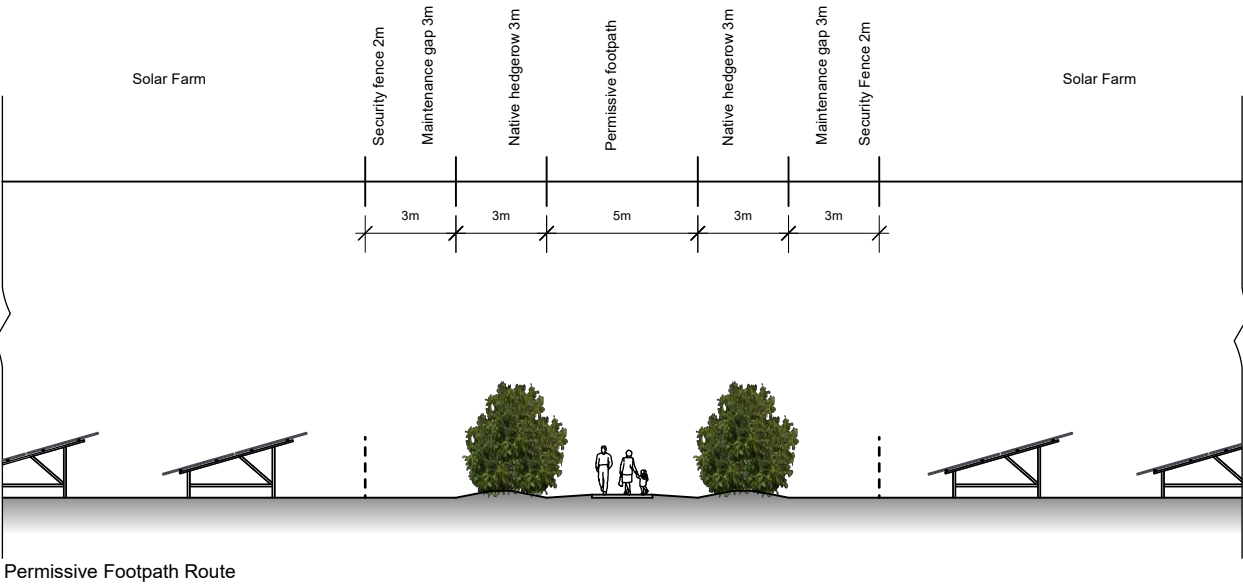

Permissive footpath - Route may benefit from directional signage, points of interest (wildlife boards for example) and other enroute activities.

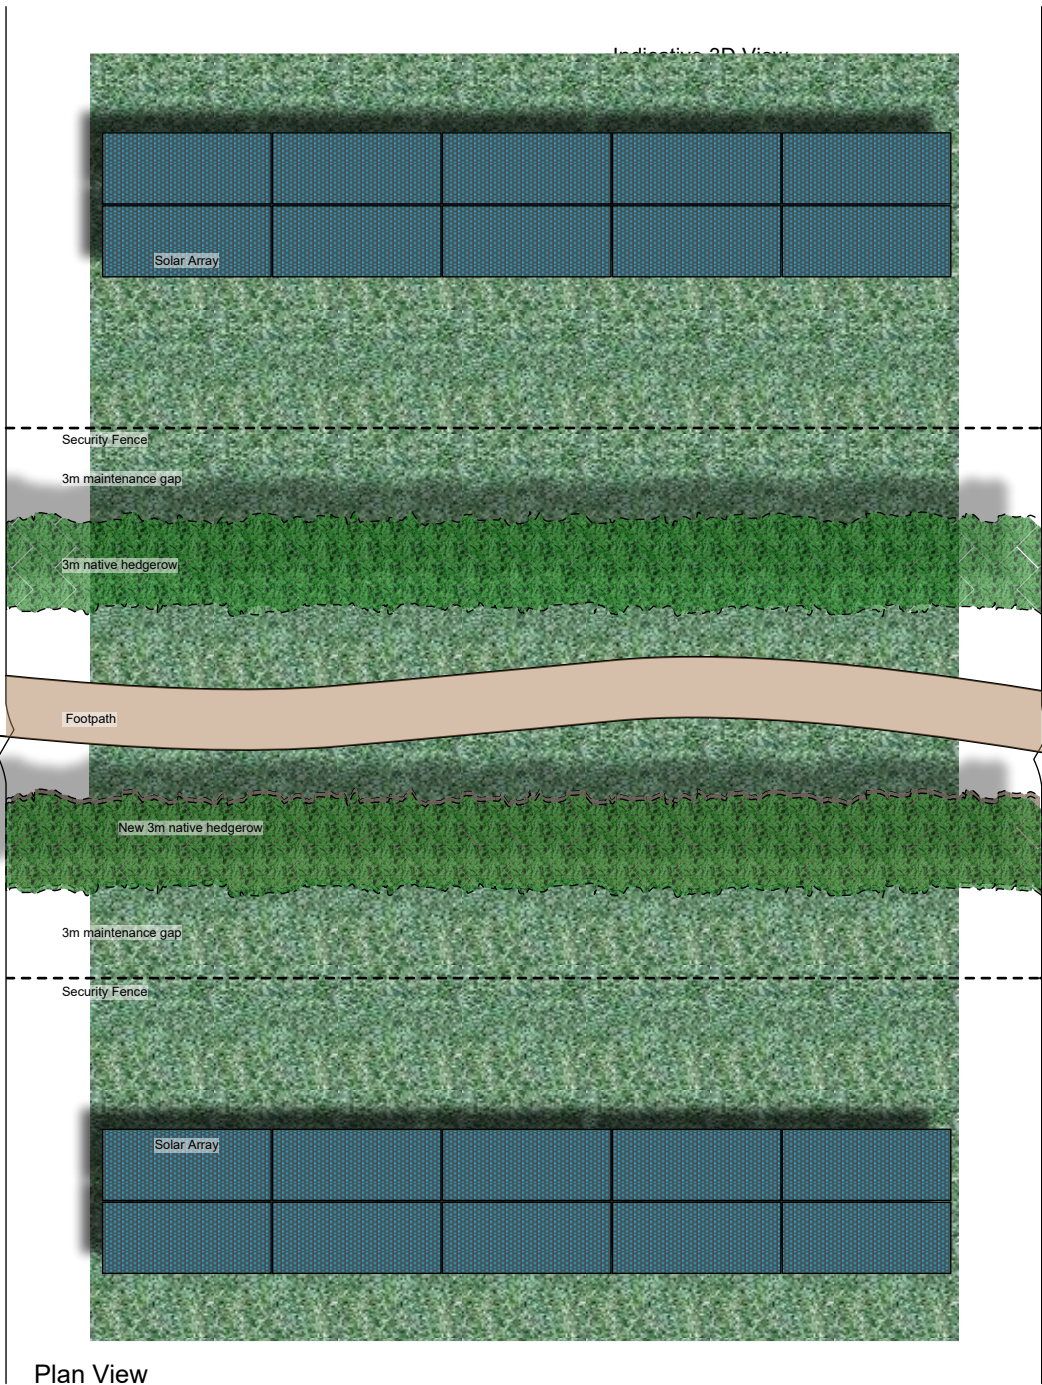

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS



MAKING
COMPLEX
EASY

A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm



Title Indicative greenway plans -
Footpath (2)
Year 15

Status Drawn By PM/Checked by
FINAL AJC JA

Job Ref Scale @ A3 Date Created
EN010147/APP/7.6.3 1:250 Nov 2024

Figure Number Rev
7.6.3.2 L -

rpsgroup.com
20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com

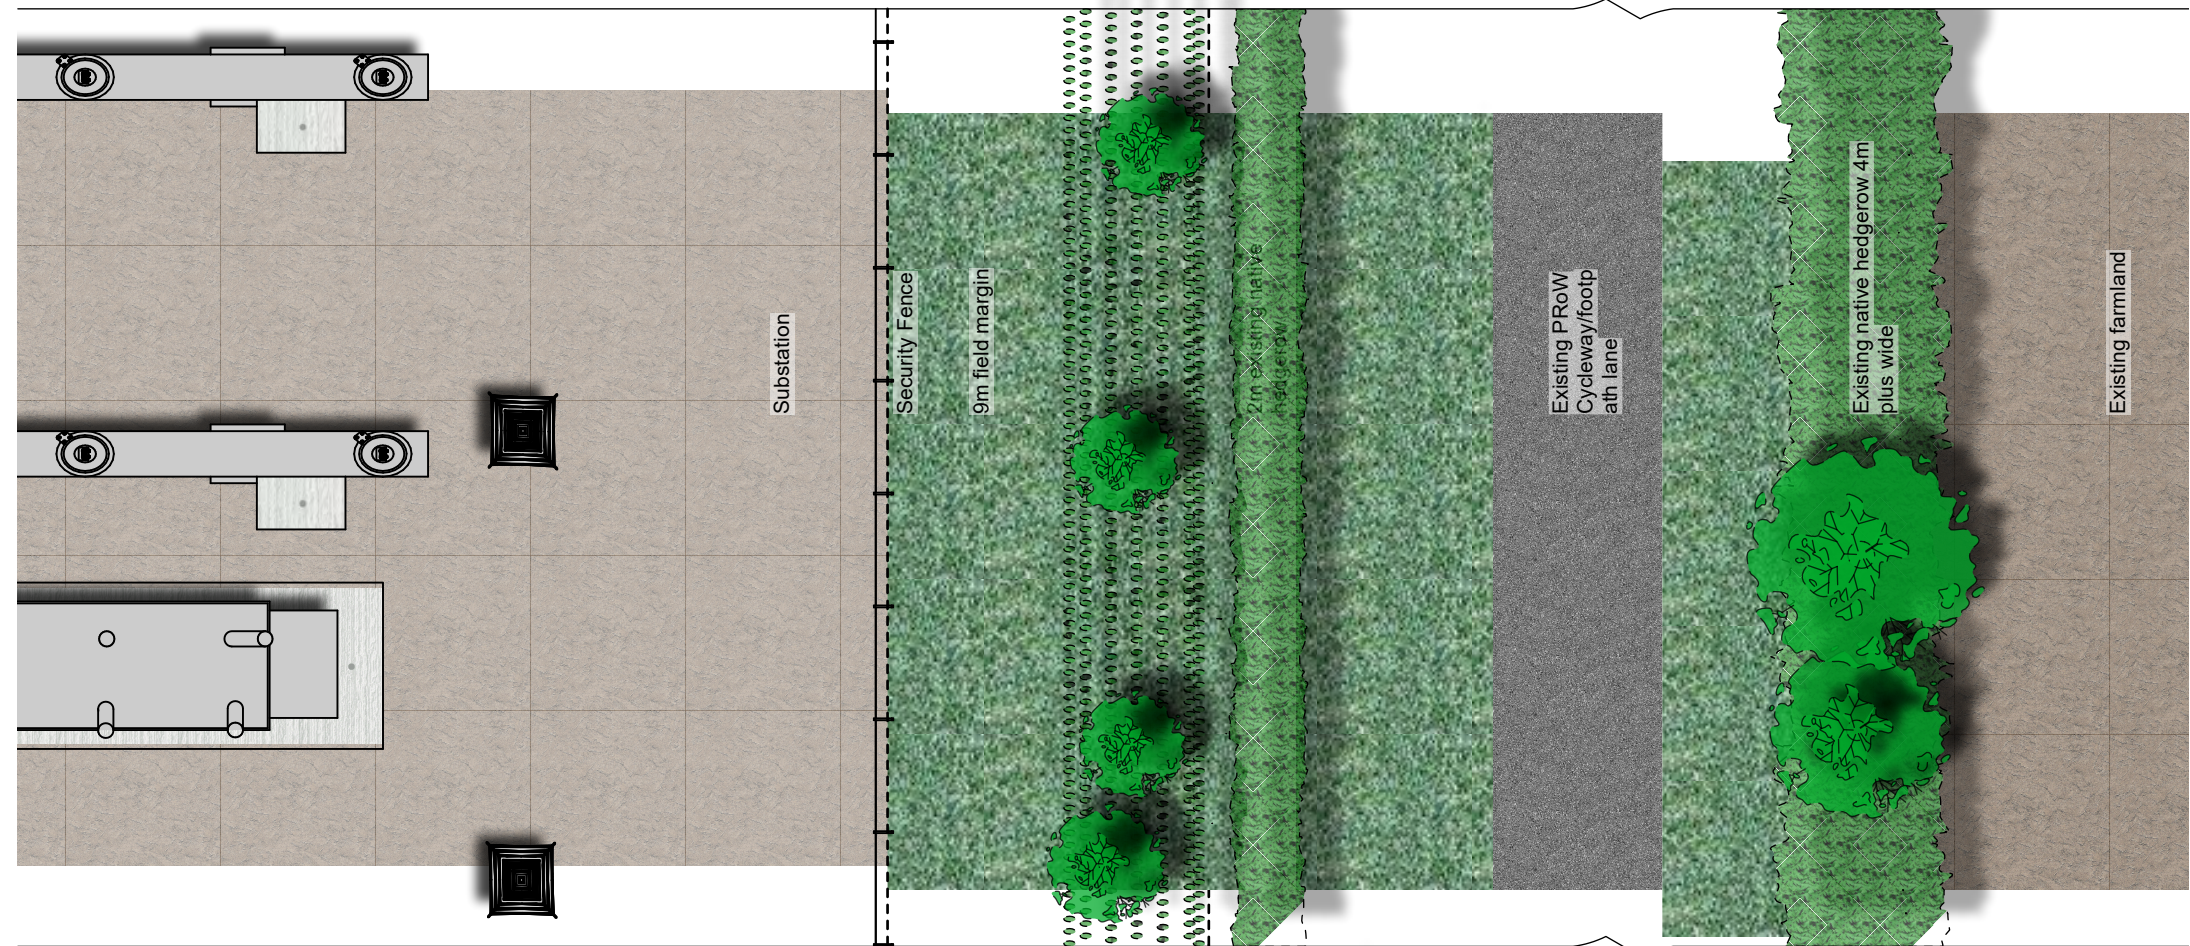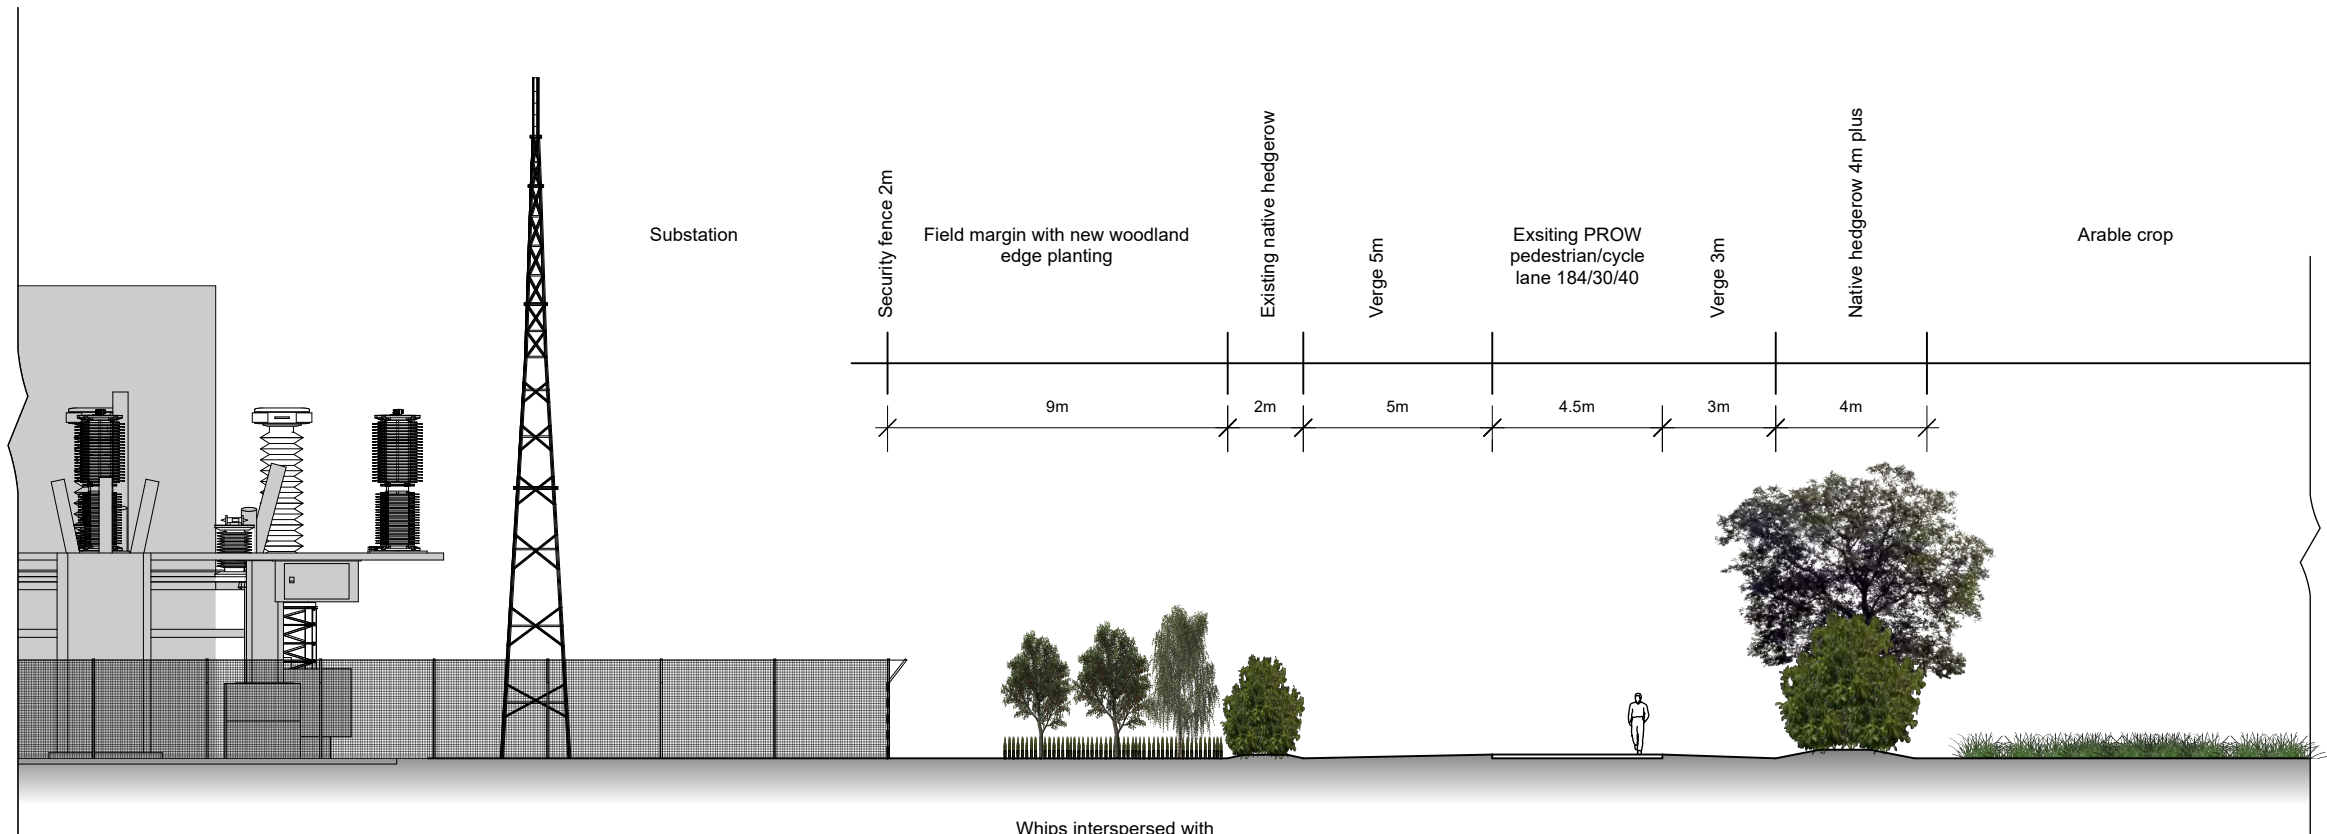

Plan View

Whips interspersed with new standard trees

© 2023 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS





rps MAKING
COMPLEX
EASY
A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans -
PRoW Local to Substation
Year 1

Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024
Figure Number		Rev
7.6.3.2M		-

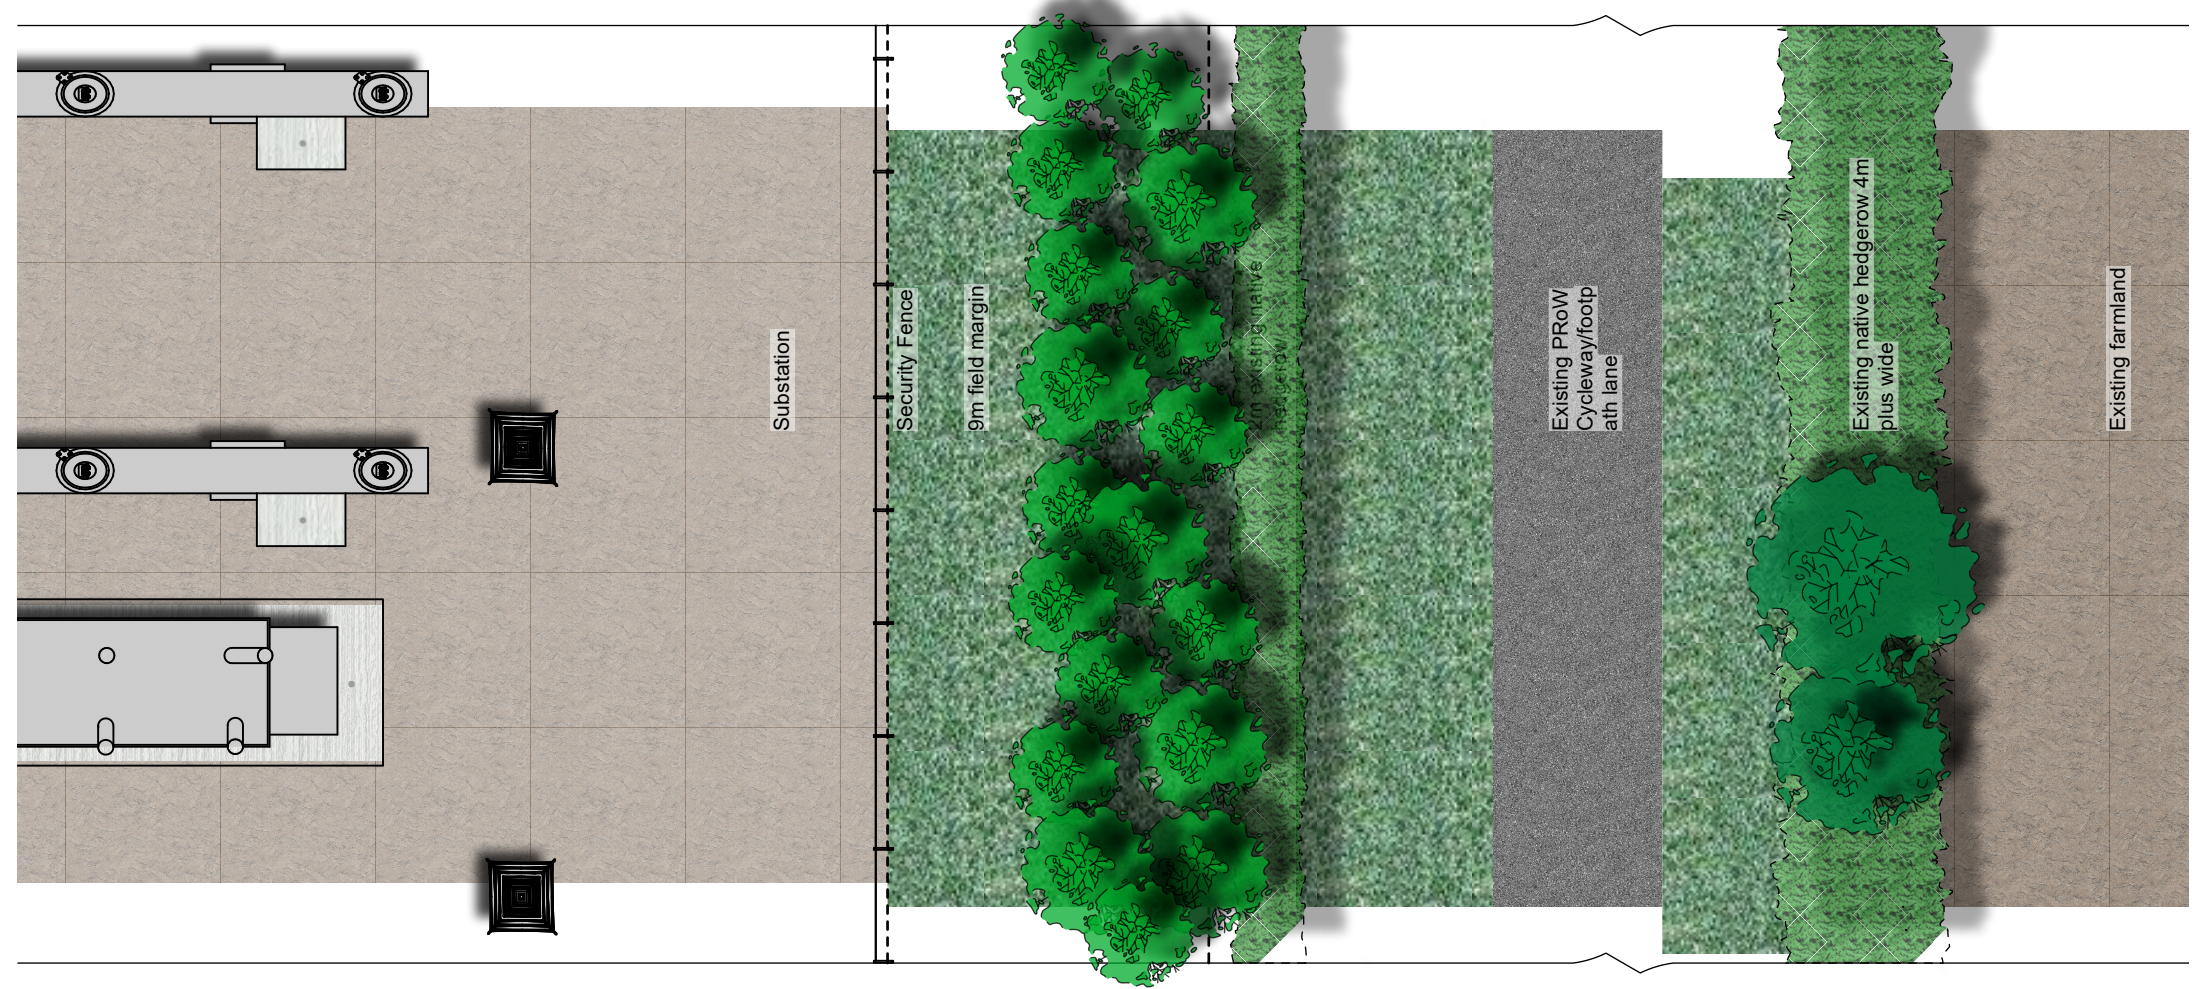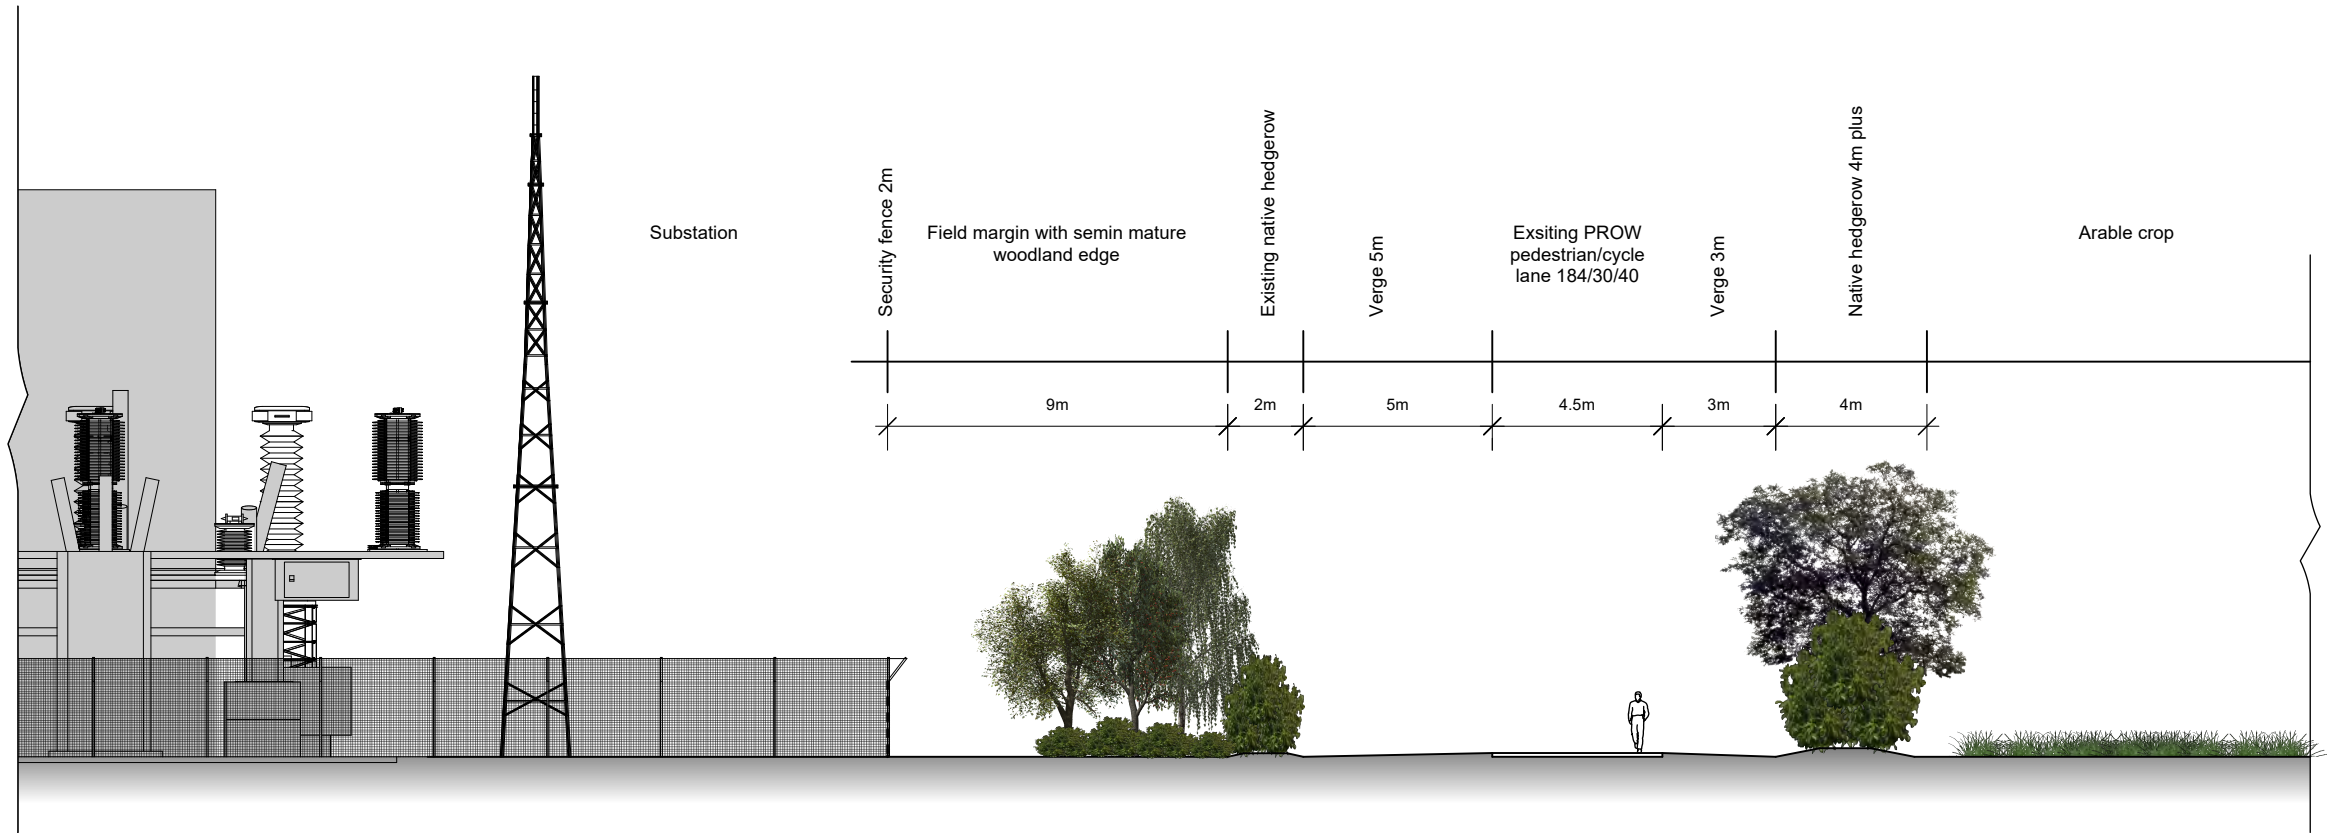

Plan View

Semi mature trees at 5 years.

- © 2023 RPS Group
- Notes**
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
 2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
 3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
 4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
 5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
 6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date
-----	-------------	----	----	------

PHOTOVOLT DEVELOPMENT PARTNERS

MAKING COMPLEX EASY

A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plans - PROW Local to Substation Year 5

Status FINAL

Drawn By AJC

PM/Checked by JA



Job Ref EN010147/APP/7.6.3

Scale @ A3 1:250

Date Created Nov 2024

Figure Number 7.6.3.2N

Rev -

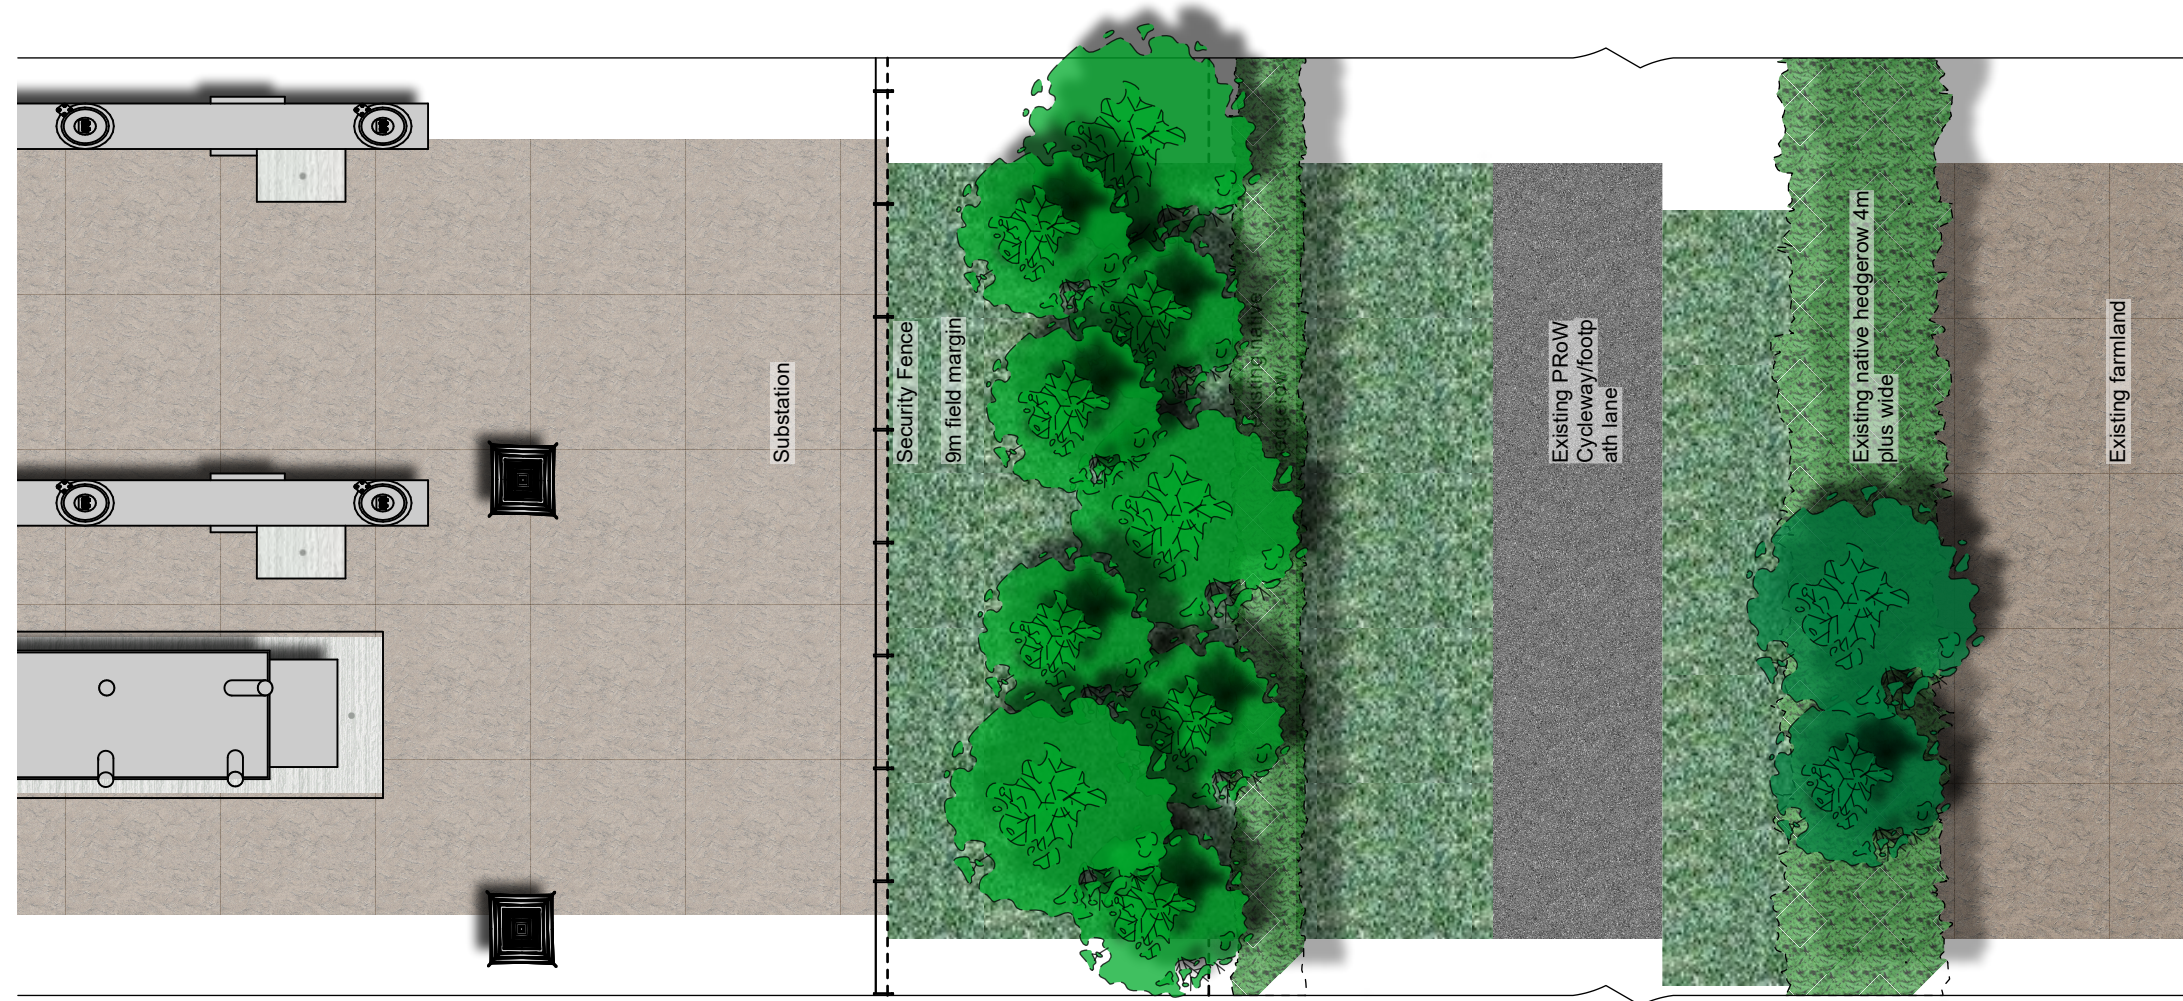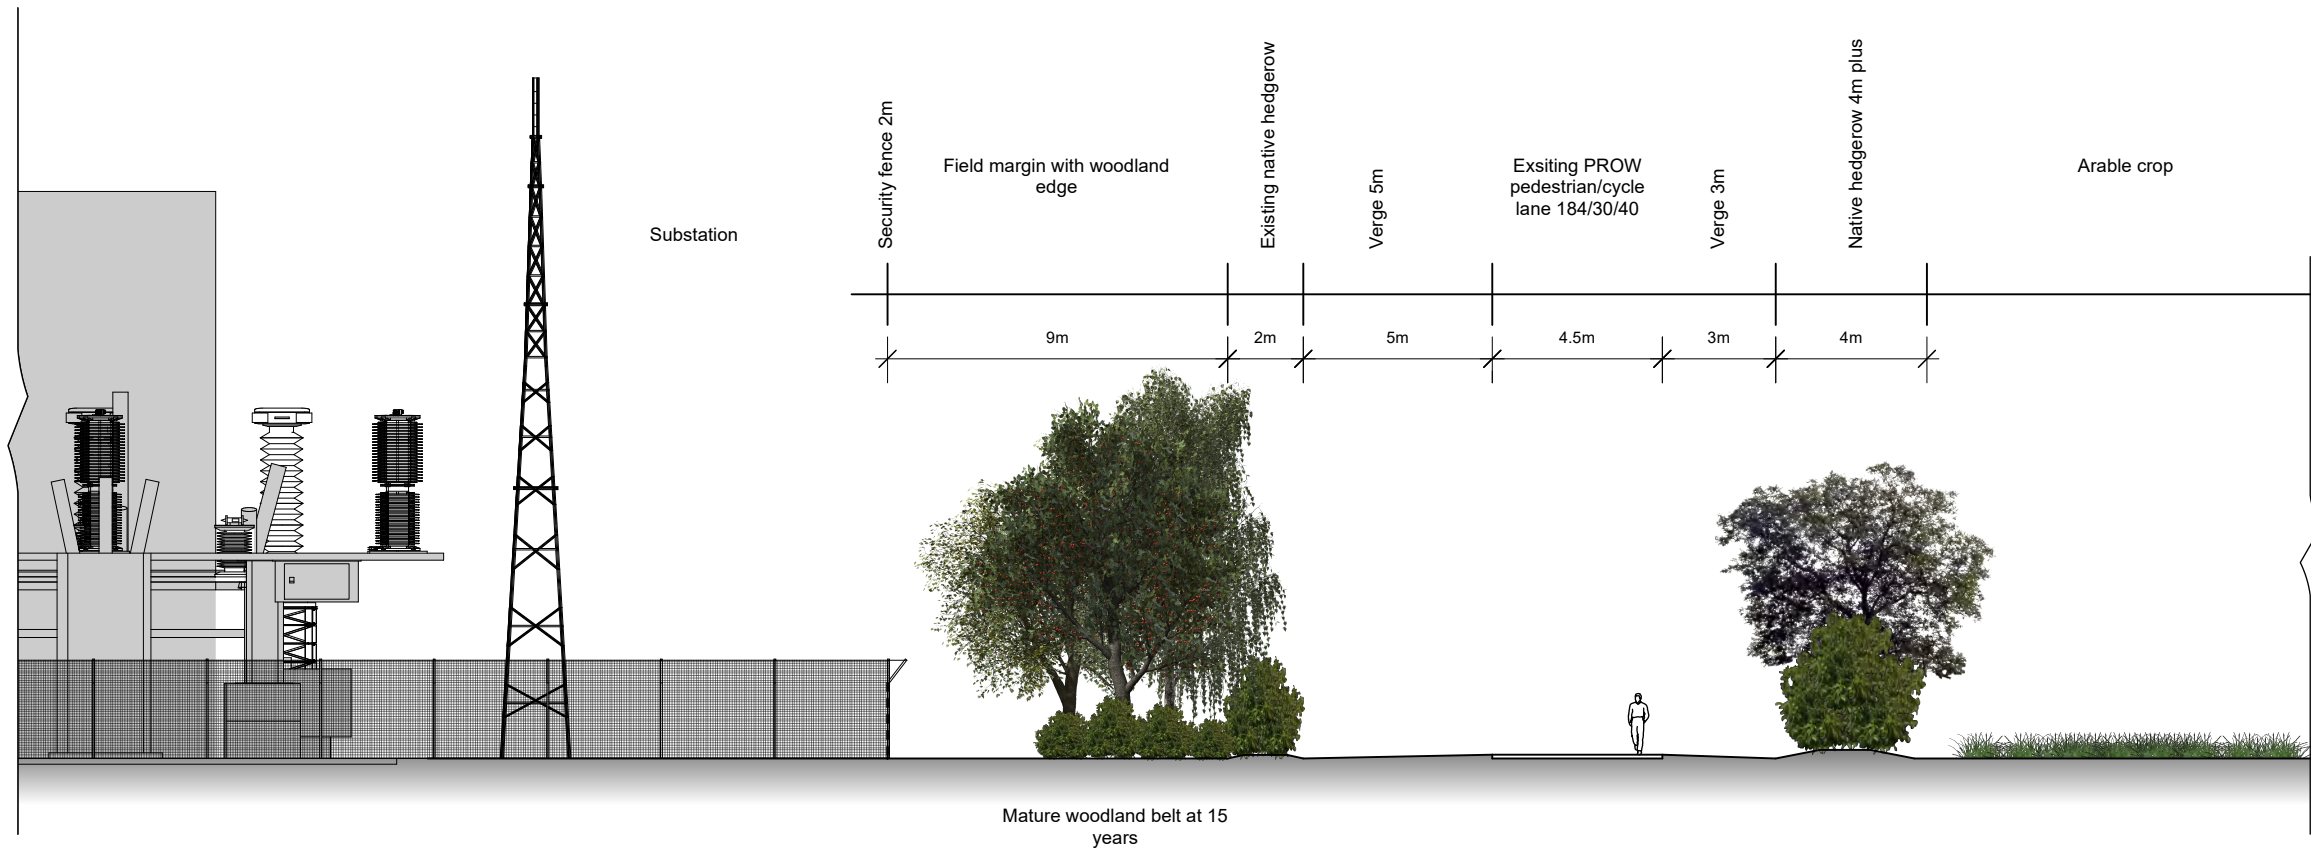

Plan View

© 2023 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.
3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.
4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).
5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.
6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date




Client PVDP

Project Botley West Solar Farm


Title Indicative greenway plans -
PRow Local to Substation
Year 15

Status	Drawn By	PM/Checked by
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	1:250	Nov 2024
Figure Number		Rev
7.6.3.20		-

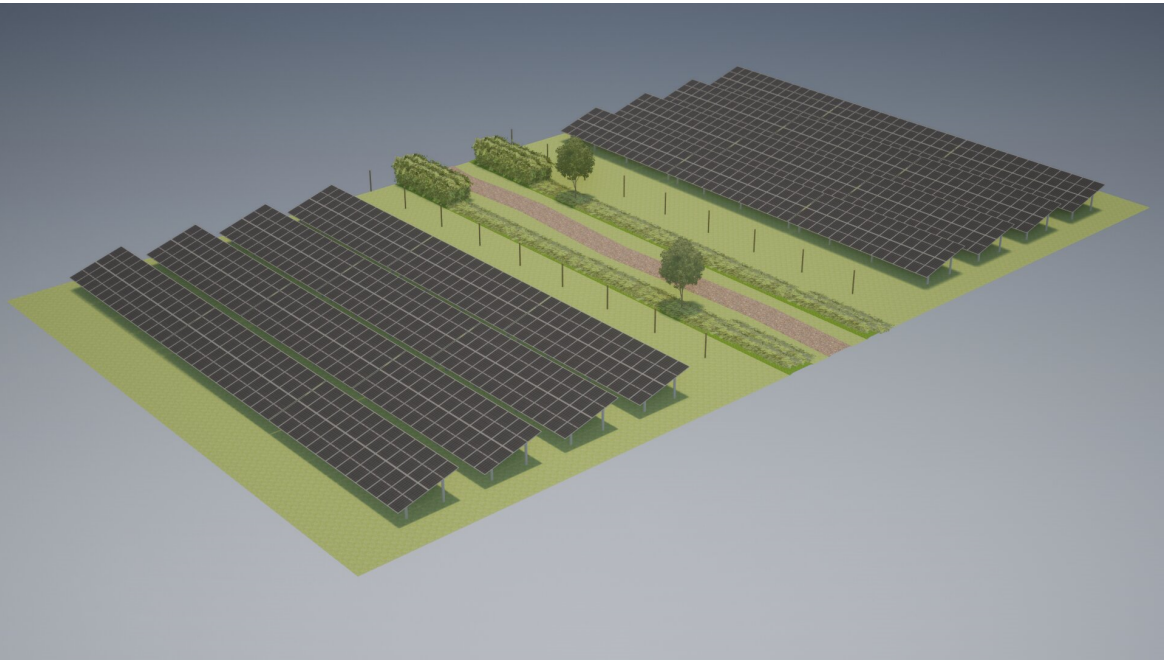

Indicative 3D View - Year 1

New native hedge planted as individual whips

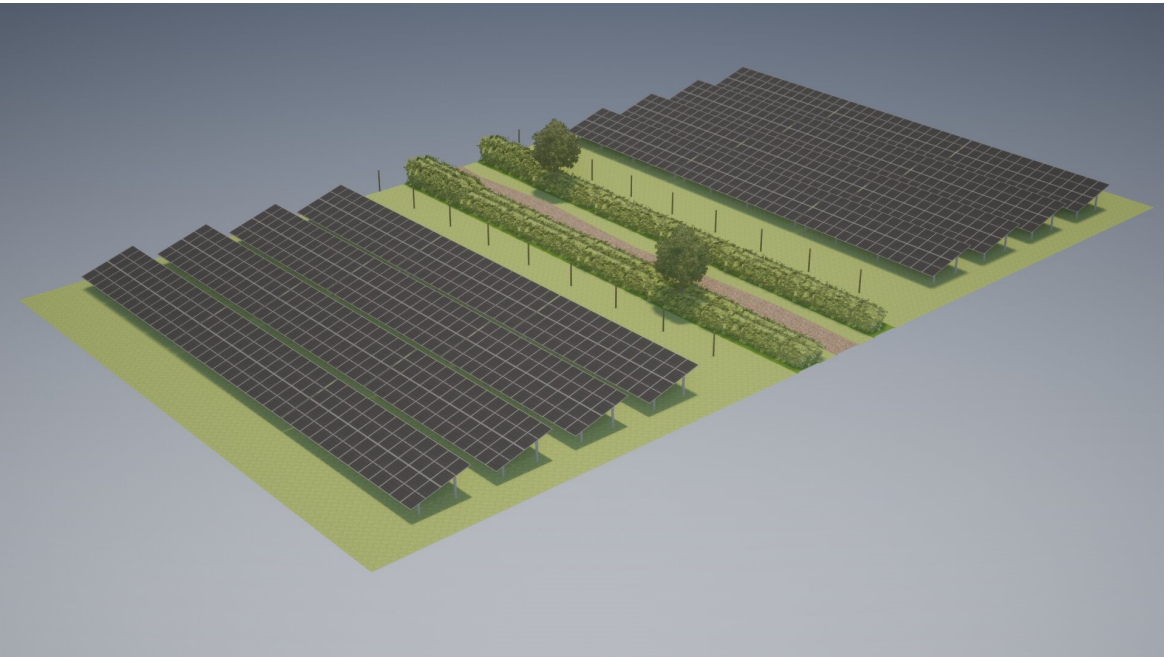

Indicative 3D View - Year 5

New native hedge partially established by year 5 and providing screening between 'greenways' and solar PV arrays within fields.



Indicative 3D View - Year 15

At year 15 native hedge established and maintained to ensure good health and density.

© 2023 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

3. i. The plans shown are for planning purposes only.
ii. All buildings shown are subject to further detailed design for construction purposes.

4. For the purposes of this plan, RPS is not appointed as principal designer for the purposes of the Construction (Design & Management) Regulations 2015 (or its successors).

5. The design and layout of the buildings shown will be subject to relevant Building Regulation requirements and Construction (Design & Management) Regulations requirements, and any other relevant regulations and requirements including fire safety and other health and safety regulations and requirements. This may result in further changes to the final design and construction of the development.

6. The information shown on these drawings is reliant upon the details, plans, drawings, elevations and other information provided to RPS by and/or on behalf of the client.

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS





MAKING
COMPLEX
EASY

A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative greenway plan -
 Hedgerow Infill Plan

Status	Drawn By	PM/Checked By
FINAL	AJC	JA
Job Ref	Scale @ A3	Date Created
EN010147/APP/7.6.3	N/A	Nov 2024
Figure Number		Rev
7.6.3.2P		-




© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

- Legend**
- Order Limits
 - Greenway
 - Public Rights of Way
 - Footpath
 - Bridleway
 - National Cycle Network

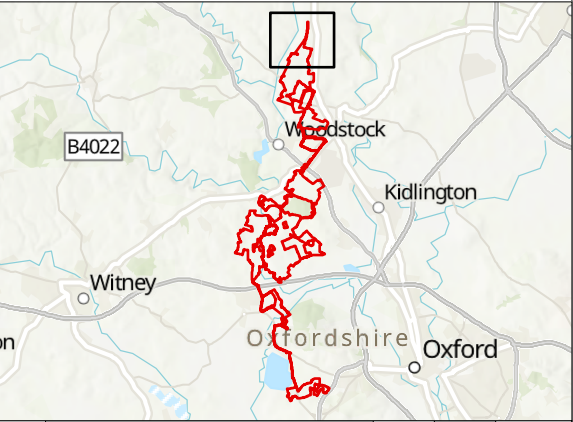

Rev	Description	By	CB	Date



PHOTOVOLT
DEVELOPMENT PARTNERS



rps
A TETRA TECH COMPANY

Client	PVDP		
Project	Botley West Solar Farm		
Title	Indicative location of proposed greenways		
Status	Drawn By	PM/Checked By	
FINAL	SHB	CL	
Project Number	Scale @ A3	Date Created	
NP12426	1:9,000	OCT 2025	
Figure Number	Rev		
7.6.3.3	7		

rpsgroup.com
20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com




© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

- Legend**
- Order Limits
 - Greenway
 - Public Rights of Way
 - Footpath
 - Bridleway
 - National Cycle Network
 - Proposed Cycling Path

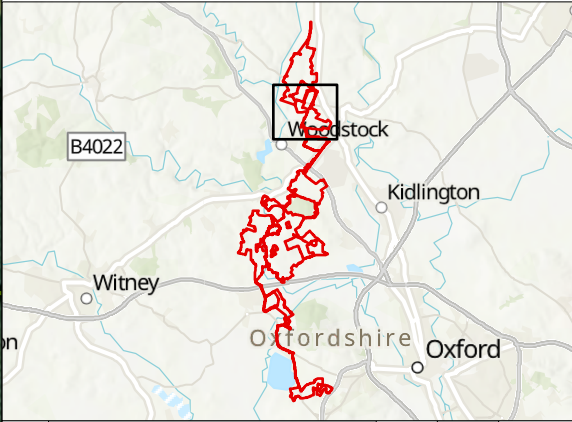

Rev	Description	By	CB	Date



PHOTOVOLT
DEVELOPMENT PARTNERS



rps
A TETRA TECH COMPANY

Client	PVDP		
Project	Botley West Solar Farm		
Title	Indicative location of proposed greenways		
Status	Drawn By	PM/Checked By	
FINAL	SHB	CL	
Project Number	Scale @ A3	Date Created	
NP12426	1:9,000	OCT 2025	
Figure Number	Rev		
7.6.3.3	7		



© 2025 RPS Group


Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

Legend

- Order Limits
- Greenway
- Public Rights of Way
- Footpath
- Bridleway
- Shakespeare's way
- National Cycle Network
- Permissive Path

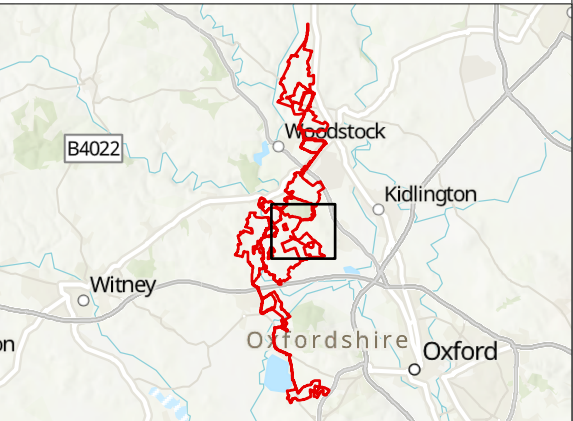

Rev	Description	By	CB	Date



PHOTOVOLT
DEVELOPMENT PARTNERS




rps
A TETRA TECH COMPANY

Client	PVDP		
Project	Botley West Solar Farm		
Title	Indicative location of proposed greenways		
Status	Drawn By	PM/Checked By	
FINAL	SHB	CL	
Project Number	Scale @ A3	Date Created	
NP12426	1:9,000	OCT 2025	
Figure Number			Rev
7.6.3.3			7
rpsgroup.com			
20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH			
T: +44(0)1235 821 888 E: rps@rpsgroup.com			



© 2025 RPS Group

Legend

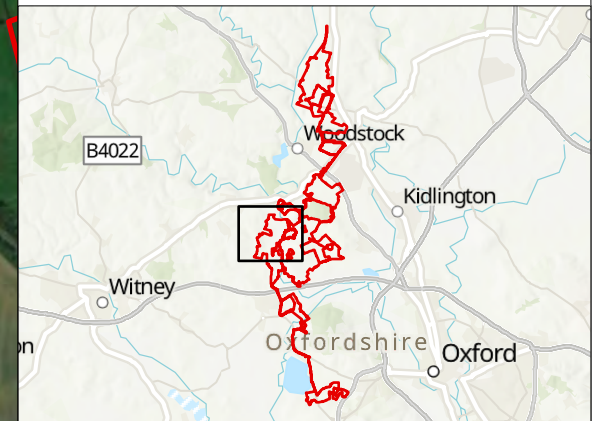

Rev	Description	By	CB	Date



Client	PVDP
--------	------

rpsgroup.com



© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

Legend

Order Limits

Greenway

Public Rights of Way

Footpath

Bridleway

Restricted byway

Shakespeare's way

Proposed Permissive Path

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS

rps

A TETRA TECH COMPANY

Client

PVDP

Project

Botley West Solar Farm

Title

Indicative location of proposed greenways

Status

FINAL

Project Number

NP12426

Figure Number

7.6.3.3

Drawn By

SHB

Scale @ A3

1:9,000

PM/Checked By

CL

Date Created

OCT 2025

Rev

7

rpsgroup.com

20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com




© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

- Legend**
- Order Limits
 - Greenway
 - Public Rights of Way
 - Footpath
 - Bridleway
 - Proposed Cycling Path
 - Proposed Permissive Path

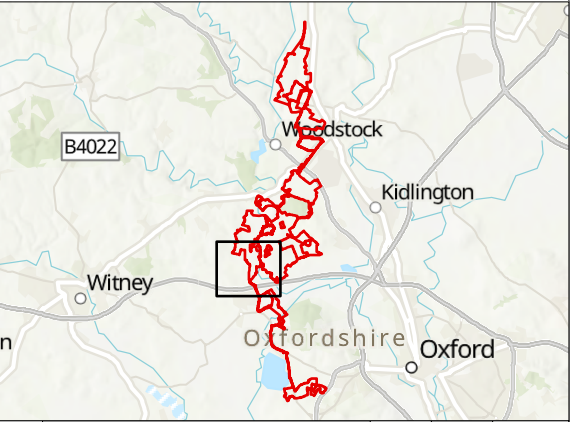

Rev	Description	By	CB	Date



PHOTOVOLT
DEVELOPMENT PARTNERS



rps
A TETRA TECH COMPANY

Client	PVDP		
Project	Botley West Solar Farm		
Title	Indicative location of proposed greenways		
Status	Drawn By	PM/Checked By	
FINAL	SHB	CL	
Project Number	Scale @ A3	Date Created	
NP12426	1:9,000	OCT 2025	
Figure Number	Rev		
7.6.3.3	7		



© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

Legend

Order Limits

Public Rights of Way

- Footpath
- Bridleway
- Oxford Greenbelt Way

Existing PRoWs to be Diverted

- Bridleway
- Footpath

Temporary Diversions

- Footpath
- Bridleway

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS

rps
A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative location of proposed greenways

Status
FINAL

Project Number
NP12426

Figure Number
7.6.3.3

Drawn By
SHB

Scale @ A3
1:9,000

PM/Checked By
CL

Date Created
OCT 2025

Rev
7

rpsgroup.com

20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps@rpsgroup.com



© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

Legend

- Order Limits
- Public Rights of Way
- Footpath
- Bridleway
- Oxford Greenbelt Way

Rev	Description	By	CB	Date

PHOTOVOLT
DEVELOPMENT PARTNERS

rps
A TETRA TECH COMPANY

Client PVDP

Project Botley West Solar Farm

Title Indicative location of proposed greenways

Status

FINAL

Project Number

NP12426

Figure Number

7.6.3.3

Drawn By

SHB

Scale @ A3

1:9,000

PM/Checked By

CL

Date Created

OCT 2025

Rev

7

rpsgroup.com

20 Western Avenue, Milton Park, Abingdon, Oxfordshire, OX14 4SH

T: +44(0)1235 821 888 E: rps@rpsgroup.com

P:\eur-mpfs-02.eur.rpsgroup.com\Projects\12426 Proposed DCO Scale Solar Development 860mw\Tech\Drawings\12426-0207-07.aprx

\\t:\local\RPS\Europe\PL_GIS\794\AzureEcologyData\Projects\ECO02307 Blenheim Solar DCO\TechDrawings\ECO02307-0056-01 Bat_TierAOnly.aprx



© 2025 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipients responsibility to print to correct scale. Only written dimensions should be used.

- Legend**
- Order Limits
 - Cable Corridors - Temporary Development Only
 - Buffer 25m - Tier A Buffers: Woodland and linear feature bat corridors

Rev	Description	By	CB	Date
		 		

Client **PVDP**

Project **Botley West Solar Farm**

Title **Tier A Bat Buffers**

Status **Final** Drawn By **LP** PM/Checked By **NB**

Drawing Number **EN010147/APP/xx** Scale @ A3 **1:65,000** Date Created **04/11/2025**


Figure Number **8.1** Rev **01**

rpsgroup.com
101 Park Drive, Milton Park, Abingdon, Oxfordshire, OX14 4SH
T: +44(0)1235 821 888 E: rps.ox@tetratech.com

APPENDICES

Appendix A


Species Specific Enhancements Specifications

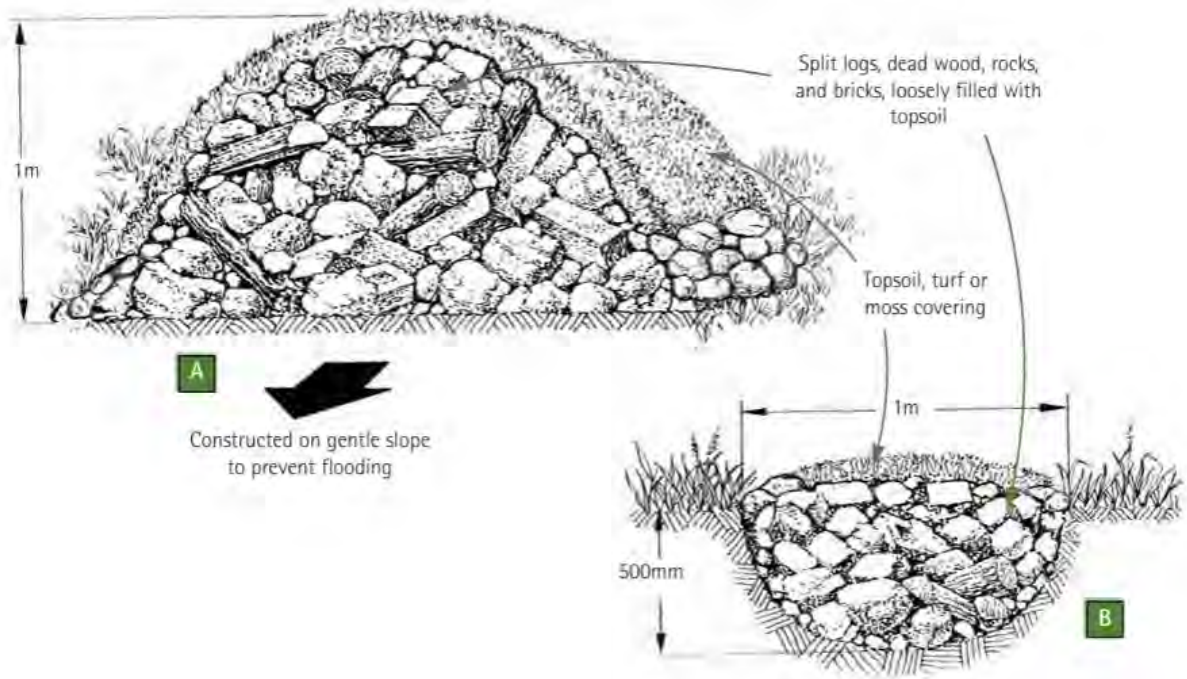

Appendix A Figure 1 Hibernacula Design (Froglife, 2001).



Appendix A Figure 2 Example bird boxes (Schwegler).

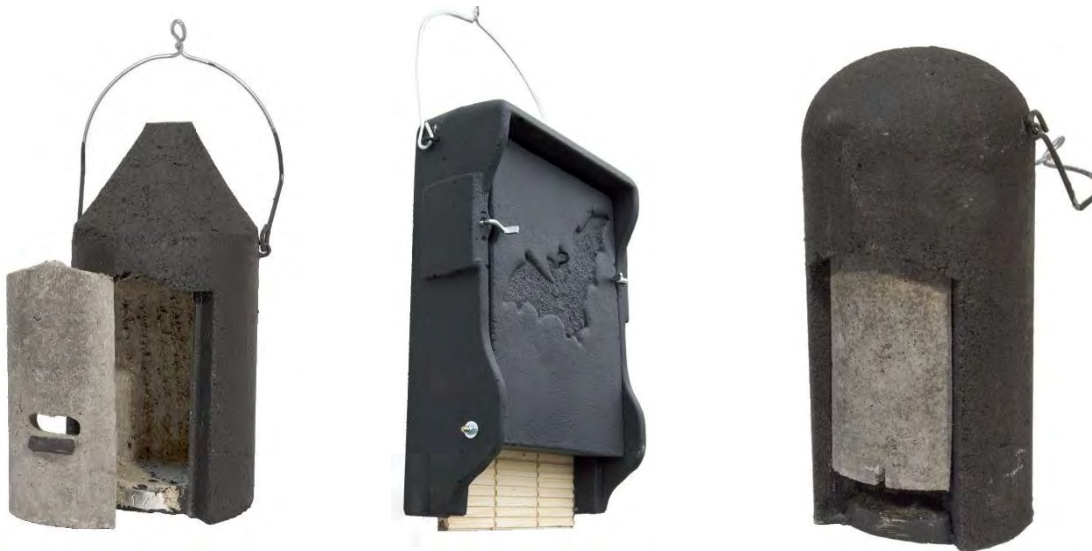

Appendix A Figure 3 Example bat boxes (Schwegler).



Appendix A Figure 4 Example insect hotels (Schwegler & National Trust).

Appendix B

Typical Planting Schedule



Typical Planting Palette

Client: PVDP

Status: For Comment

Project: Botley West Solar Park

Date: Nov. 2024

Dwg Ref: Figures 2.1 to 2.3 (Illustrative Masterplan)

Revision: A

Doc Ref: JSL4317_550

Abbr	Botanical name	Common name	Girth / size	Stock	Density / %	Approximate height after 25 years
A. Trees						
i. Specimen Native Tree Planting						
	<i>Acer campestre</i>	Field Maple	10-12cm/12-14cm	C / SR / RB	As shown	10m
	<i>Alnus glutinosa</i>	Alder	10-12cm/12-14cm	C / SR / RB	As shown	10m
	<i>Betula pendula</i>	Silver Birch	10-12cm/12-14cm	C / SR / RB	As shown	10m
	<i>Carpinus betulus</i>	Hornbeam	10-12cm/12-14cm	C / SR / RB	As shown	10m
	<i>Fagus sylvatica</i>	Common Beech	10-12cm/12-14cm	C / SR / RB	As shown	10m
	<i>Quercus robur</i>	Pendunculate Oak	10-12cm/12-14cm	C / SR / RB	As shown	12m
	<i>Prunus avium</i>	Wild Cherry	10-12cm/12-14cm	C / SR / RB	As shown	12m
	<i>Salix caprea</i>	Goat Willow	10-12cm/12-14cm	C / SR / RB	As shown	10m
B. Hedge Planting						
						Once grown to be maintained at a height of 3m
i. Native Hedgerow Mix (with spaced Standard Trees) (2m wide)						
	<i>Acer campestre</i>	Field Maple	60-80cm	B	10%	
	<i>Cornus sanguinea</i>	Dogwood	60-80cm	B	5%	
	<i>Corylus avellana</i>	Hazel	60-80cm	B	10%	
	<i>Crataegus monogyna</i>	Hawthorn	60-80cm	B	40%	
	<i>Prunus spinosa</i>	Blackthorn	60-80cm	B	20%	
	<i>Rosa canina</i>	Dog Rose	60-80cm	B	5%	
	<i>Salix caprea</i>	Goat Willow	60-80cm	B	5%	
	<i>Viburnum opulus</i>	Guelder Rose	60-80cm	B	5%	
Planted at 7.00p/m in three staggered rows, native specimen trees (as above) planted at 10 m intervals					100%	
C. Woodland						
i. Structural Woodland and Shrub Mix						
	<i>Acer campestre</i>	Field Maple	80-100cm	B	20%	Structural Woodland Mix between 6-12m
	<i>Corylus avellana</i>	Hazel, Cobnut	80-100cm	B	10%	
	<i>Crataegus monogyna</i>	Hawthorn	80-100cm	B	10%	
	<i>Fagus sylvatica</i>	Common Beech	80-100cm	B	10%	
	<i>Malus sylvestris</i>	Crab Apple	80-100cm	B	20%	
	<i>Ilex aquifolium</i>	Holly	80-100cm	C	5%	
	<i>Quercus robur</i>	English Oak	80-100cm	C	20%	
	<i>Pinus sylvestris</i>	Scots Pine	80-100cm	C	5%	
Planted at 1.5m centres, in single species clusters of 3 - 10No.					100%	
ii. Wet Woodland and Scrub Mix						
	<i>Alnus glutinosa</i>	Alder	60-80cm	B	20%	
	<i>Betula pubescens</i>	Downy Birch	60-80cm	B	10%	
	<i>Salix caprea</i>	Goat Willow	60-80cm	B	20%	
	<i>Salix fragilis</i>	Crack Willow	60-80cm	B	10%	
	<i>Salix viminalis</i>	Common Osier	60-80cm	B	20%	
	<i>Viburnum opulus</i>	Guelder Rose	60-80cm	C	20%	
Planted at 1.5m centres, in single species clusters of 3 - 10No.					100%	

E. Grass and Meadow areas

i. Amenity Grass

Mown Amenity Grass	Mix A22 by BSH (or similar and approved)	S
--------------------	--	---

ii. Meadow

Grazing Grassland	EG26/27 Old Fashioned Grazing Mixture by Emorsgate (or similar and approved)	S
Field Margin Meadow	EH1 Hedgerow Mixture by Emorsgate (or similar and approved)	S
Tussock Grassland	EM10 Tussock Mixture by Emorsgate (or similar and approved)	S
Woodland Meadow	EG9 Grass Mixture for Hedgerows and Woodland by Emorsgate (or similar and approved)	S
Wildflower Meadow	EM2 Standard General Purpose Meadow Mixture by Emorsgate (or similar and approved)	S
Wetland Meadow	EM8 Meadow Mixture for Wetlands by Emorsgate (or similar and approved)	S
Wildbird seed crop	KEAUT1 Enhanced Autumn Sown Wild Bird Seed Mix by Kings Crops (or similar and approved)	S

Stock Abbreviations:	C = Container grown	S = Seeded
	SR = Spring ringed	T = Turfed
	RB = Root balled	Cl = Cell grown
	B = Bagged	Bl = Bulb

BIOSECURITY STATEMENT

RPS GROUP ARE COMMITTED TO THE PROTECTION OF THE UK ENVIRONMENT AND RECOGNISE THE IMPORTANCE OF RISKS POSED BY IMPORTED PESTS AND DISEASES

- All trees and shrubs are to be sourced responsibly, in the first instance, from UK Nurseries / suppliers, where they have been propagated and/or grown on for a minimum of 5 years in the UK (2 years for shrubs);

- In light of this, all suppliers shall be approved, shall share our values and must have a sound Biosecurity Policy / Management Systems in place to demonstrate the traceability of their stock, and an awareness of the prevalence of all current biosecurity threats, both domestically and abroad;

- The contractor is responsible for ensuring that they operate in strict accordance with the latest guidelines set out by DEFRA, including regularly checking for updates in relation to the latest plant health controls / diseases; i.e. (<https://planthealthportal.defra.gov.uk/>)

- Inspections will be carried out at selected nurseries and plant health certification / passports will be sought to identify traceability of tree and shrub stock as required.



Typical Tree and Shrub Palette

Client: BP Lightsource
 Project: Plas Power Solar Park
 Dwg Ref: JSL3436_100
 Doc Ref: JSL3436_550

Status: Planning
 Date: Sept 2023
 Revision: -


Abbr	Botanical	Common	Girth / size	Stock	Density / %
------	-----------	--------	--------------	-------	-------------

A. Trees

i. Heavy Standard Tree

Acer camp Field Mapl 12-14cm C / SR / RB

B. Hedge Planting



i. Native Hedgerow Mix (2m wide)

Acr cm	<i>Acer camp</i> Field Mapl	60-80cm	B	10%
Crns sn	<i>Cornus sar</i> Dogwood	60-80cm	B	5%
Crtg mn	<i>Corylus av</i> Hazel	60-80cm	B	10%
Cryls av	<i>crataegus</i> Hawthorn	60-80cm	B	40%
Prns sp	<i>Prunus spi</i> Blackthorn	60-80cm	B	20%
Rs cn	<i>Rosa canin</i> Dog Rose	60-80cm	B	5%
Slx cp	<i>Salix capre</i> Goat Willo	60-80cm	B	5%
Vb op	<i>Viburnum c</i> Guelder R	60-80cm	B	5%
Planted at 7.00/m in three staggered rows				100%

ii. Extra-Wide Native Hedgerow Mix (4m Wide)

Acr cm	<i>Acer camp</i> Field Mapl	60-80cm	B	10%
Crns sn	<i>Cornus sar</i> Dogwood	60-80cm	B	5%
Crtg mn	<i>Corylus av</i> Hazel	60-80cm	B	10%
Cryls av	<i>crataegus</i> Hawthorn	60-80cm	B	40%
Prns sp	<i>Prunus spi</i> Blackthorn	60-80cm	B	20%
Rs cn	<i>Rosa canin</i> Dog Rose	60-80cm	B	5%
Slx cp	<i>Salix capre</i> Goat Willo	60-80cm	B	5%
Vb op	<i>Viburnum c</i> Guelder R	60-80cm	B	5%
Planted at 10.00/m in four staggered rows				100%

C. Woodland and Groundcover Mix Planting

i. Native Woodland Mix

Acr cm	<i>Acer camp</i> Field Mapl	60-80cm	B	10%
Cryls av	<i>Corylus av</i> Hazel, Col	80-100cm	B	30%

Crtg mn	<i>Crataegus</i> Hawthorn 80-100cm	B	10%
Mls sy	<i>Malus sylvestris</i> Crab Appl 80-100cm	B	20%
Qr ro	<i>Quercus robur</i> English Oak 80-100cm	C	30%
	Native mix planted at 1.5m centres, in single species		100%

D. Grass and Meadow areas

i. Meadow

Ecological Meadow	BEH1 Hedgerow Mixture by Emorsay	S	4g/m ²
Tussock Meadow Mix	EM10 Tussock Mixture by Emorsay	S	4g/m ²
Grassland Mixture	EG9 Grass Mixture for Hedgerow	S	5g/m ²

Stock Abbreviations: C = Container grown S = Seeded
 SR = Spring ringed T = Turfed
 RB = Root balled CI = Cell grown
 B = Bagged BI = Bulb

BIOSECURITY STATEMENT
 RPS GROUP ARE COMMITTED TO THE PROTECTION OF THE UK ENVIRONMENT AND RECOGNISE

Appendix C

Typical Maintenance Schedule

APPENDIX C – TYPICAL MAINTENANCE SCHEDULE

MAINTENANCE ITEM		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Planting: General	Periodic removal of litter, leaf litter, rubbish and debris from all planted areas (including grassed areas) within education area. Periodic removal of litter from main public rights of way routes. Dispose of arisings from all specified operations off site.	.	.	.	.	.	.	.	.	.	.	.	.
Planting: General	Periodic watering of all planted areas, within education area, sufficient to maintain healthy growth, irrespective of season or weather conditions*, until restrained from doing so by statutory legislation. Specimen trees to be irrigated by means of dedicated irrigation tubes where provided. (*Do not water when ground is frozen / likely to freeze).			.	.	.	.	.	.	.	.		
Planting: General	Within the education area, maintain a weed free environment. Periodic removal of unwanted weed growth within planted areas manually or by treatment with glyphosate-based herbicide to maintain weed free environment as required. Remove all weed growth from site. Carryout out periodic inspections / visits to education area as required. Adjacent paths and surfaces to be swept clean as the work proceeds, and the site left tidy.			.	.	.	.	.	.	.	.		
Planting: General	Within education area, re-firm all plants affected by frost heave / wind rock / vandalism by treading around the base. Re-stake trees if necessary. Collars at the base of tree stems created by tree movement to be broken up by fork, avoiding damage to roots, backfilled with topsoil as necessary, and re-firmed.			.						.			
Planting: General	Within education area, check all existing trees and hedging with regard to public safety. Report any trees that appear to pose a risk to public safety and conduct remedial work as necessary in accordance with good arboricultural practice.			.							.		

APPENDIX C – TYPICAL MAINTENANCE SCHEDULE

MAINTENANCE ITEM		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Planting: General	Within education area and along main PRoW corridors where planting is considered to be unsafe, prune trees / shrubs only to remove vandalised, dead / dangerous branches or to promote healthy growth / natural shape. Remove all cuttings from site. Except where specified otherwise, prune trees and shrubs as recommended by BS:7370 Part 4 clause 3.6.3 to 3.6.5. Confirm which trees are covered by Tree Preservation Orders and seek appropriate permission prior to conducting any arboricultural work. Relevant trees to be checked for safety by a suitably trained arboricultural specialist. Pruning shall be conducted by skilled labour only. Do not apply growth retardants, fungicide or sealant unless instructed otherwise. Herbaceous plants to be trimmed according to their growth habit.			.						.			
Planting: General	Within education area, periodically check / replace / adjust tree stakes, ties and rabbit / strimmer guards as required. Remove redundant tapes, tags, ties, labels and other encumbrances.	.		.		.		.		.		.	
Planting: General	Within education area, ensure 50mm of 50-75mm grade bark mulch is maintained to all planted areas and to base of individual trees set into grass.												.
Planting: General	Within education area, apply Enmag CRF granular fertilizer, or similar, at ~140g per individual tree pits and approx. 70g / sqm to planted areas (quantities to be confirmed by manufacturer).			.									
Planting: General	Replace any diseased, damaged or dead plants with plant stock of the same size / species (unless otherwise directed by the Landscape Architect or LPA). A schedule of all dead plant material removed is to be kept by the Maintenance Operator.										.		
Planting: General	Generally, make good all ridges, ruts, depressions and dead areas.			.	.	.	.	.	.	.	.		
Planting: General	Treat pernicious weeds (e.g. Japanese Knotweed), with an appropriate herbicide immediately after identification on site, and continue treating as necessary to achieve complete eradication.	.	.	.	.	.	.	.	.	.	.	.	.

APPENDIX C – TYPICAL MAINTENANCE SCHEDULE

MAINTENANCE ITEM		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Existing Wildlife Corridors	Where possible and where it is safe to do so, standing dead wood to be retained to provide opportunities for wildlife. Where dead wood must be thinned, this should be retained within habitat areas and stacked into piles to provide wildlife habitats. Additional wood resulting from pruning or other tree works to be similarly retained within discrete piles where possible. Surplus / additional pruning's / clippings to be removed. Selective thinning of trees and shrubs to be undertaken as required (outside of spring / summer to avoid detrimental effects on nesting birds), to ensure successful development of an open canopy and understorey vegetation. Where gaps are present, supplementary planting of native species to match those already present should be undertaken and managed accordingly. Use of herbicides, pesticides and fertilisers to be avoided.										•		
Hedgerows	To ensure that the hedgerows retain dense growth and value to wildlife, clipping should be minimised where possible with the hedgerow stock on Site cut on a 3-5 year rotation. No more than one side of the hedgerow should be trimmed in any one year, with the remainder left un-trimmed to allow continuity of cover and opportunities for wildlife. All hedgerow adjacent to tall grasslands will be cut utilising a long reach tractor flail from a minimum of 2 m from the edge of hedgerow bases to protect any dormouse that could be hibernating within tall grasslands directly adjacent to hedgerows. Trimming should take place during in late Autumn to maximise food and cover availability for wildlife and also to avoid detrimental effects on breeding birds. Where gaps are present, supplementary planting of native species to match those already present should be undertaken and managed accordingly. Use of herbicides or pesticides to be avoided. Once grown hedgerows should be managed to a height of approximately 3m during operation, managed annually, accepting that hedgerows may be managed to a lower height (the locations and heights of which to be agreed in consultation with the Oxfordshire Host Authorities) in order to support important and / or more open views, provided such maintenance falls within the scope of the environmental assessment.	•											

APPENDIX C – TYPICAL MAINTENANCE SCHEDULE

MAINTENANCE ITEM		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Structural Woodland and Shrub Mix	Monitor initial establishment of planting to ensure trees and shrubs remain upright, stable and in good condition. Where necessary, cut back or spot treat excessive bramble or other invasive / ruderal weeds to allow planted species to establish, taking care not to damage new planting. Use of herbicides or other pesticides to be avoided where possible.									•			
Grassland: General	Mowing within education area: Remove litter, rubbish and debris from grassed areas before any mowing. Do not allow mowing machinery closer than 500mm to any plant stems. Avoid damage to stems by nylon filament rotary cutters or other mechanical tools. Complete operations close to stems, corners and edges using handheld strimmer with special care taken not to cause whipping / damage to the base of tree trunks.			•	•	•	•	•	•	•	•		
Grassland: General	All grassed areas within education area to be watered periodically so as to maintain healthy growth / establishment.			•	•	•	•	•	•	•	•		
Grassland: General	Within the education area, re-seed any gaps / hollows in lawns / meadows with a seed mix selected to match existing grass in quality and appearance.			•	•	•	•	•	•	•	•		
Grassland: General	Within the education area, weed material within sward to be eradicated manually or spot treated with suitable herbicide.				•					•			
Hard Surfacing	Within education area, clear soil, mulch, litter or other debris from hard surfaced areas and remove from site.	•	•	•	•	•	•	•	•	•	•	•	•
Hard Surfacing	Hard surfaces within education area to be treated with glyphosate-based non-residual herbicide (Roundup or equal approved), in full accordance with manufacturer's recommendations & COSHH regulations.			•				•					
Fencing	Report any damage; provide temporary barriers to secure fence line where damage poses a risk to public safety.	•	•	•	•	•	•	•	•	•	•	•	•

APPENDIX C – TYPICAL MAINTENANCE SCHEDULE

MAINTENANCE ITEM		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Hard Landscape Elements (as set out in Section 3.3 of the oLEMP)	Visually inspect for vandalism / damage, make safe and report any damage to the relevant party.	•	•	•	•	•	•	•	•	•	•	•	•
General	Within education area, collect fallen leaf litter and remove from site (do not blow away). Carryout periodic visits.	•	•	•	•	•	•	•	•	•	•	•	•
General	Report any remaining element that through failure, fatigue or vandalism poses a risk to public safety.	•	•	•	•	•	•	•	•	•	•	•	•

Appendix D: Outline Landscape and Ecology Management Plan Supplement - Design Response to local landscape character.

Appendix D

**OUTLINE LANDSCAPE AND ECOLOGY MANAGEMENT PLAN SUPPLEMENT -
DESIGN RESPONSE TO LOCAL LANDSCAPE CHARACTER | JULY 2026**



i | Table of Contents

1 | OVERVIEW..... 3

 Introduction 4

2 | APPROACH..... 5

 Approach 6

3 | LOCAL LANDSCAPE CHARACTER AREAS & DESIGN RESPONSE..... 7

 LLCA 1 - LLCA 5..... 18

4 | SUMMARY & CONCLUSIONS..... 19

 Summary of Findings 20


5 | LANDSCAPE PARAMETER PLAN.....21

Section 1

Overview.

1 | Overview

- 1.1 This document has been prepared by Icen Projects Ltd as a supplement to the Outline Landscape and Ecology Management Plan to provide a finer level of detail on the local landscape character and at a more proportionate scale to the proposed Botley West Solar Farm Project. This is to inform the design response, function, implementation and management of the landscape proposals.
- 1.2 The Botley West Solar Farm is located on land within the administrative areas of Cherwell District Council (CDC), the Vale of White Horse District Council (VWHDC), West Oxfordshire District Council (WODC) and Oxfordshire County Council (OCC), which are collectively referred to as the 'Oxfordshire Host Authorities' (OHA).
- 1.3 The Applicant (Photovolt Development Partners (PVD) on behalf of SolarFive Ltd) has introduced Article 5 to the draft Development Consent Order (DCO), which gives power to maintain the proposed development, including the mitigation planting.
- 1.4 This document presents further analysis of the local landscape character, identifies landscape sensitivities and key qualities at risk. The design response was captured in the Landscape Parameter Plan, derived through an iterative design evolution process.
- 1.5 Agreement has been sought with the OHA regarding the appropriateness of the design strategy in reducing the potential for adverse effects to arise, having regard to NPS EN-1 paragraphs 5.10.6, 5.10.19 and 5.10.22.

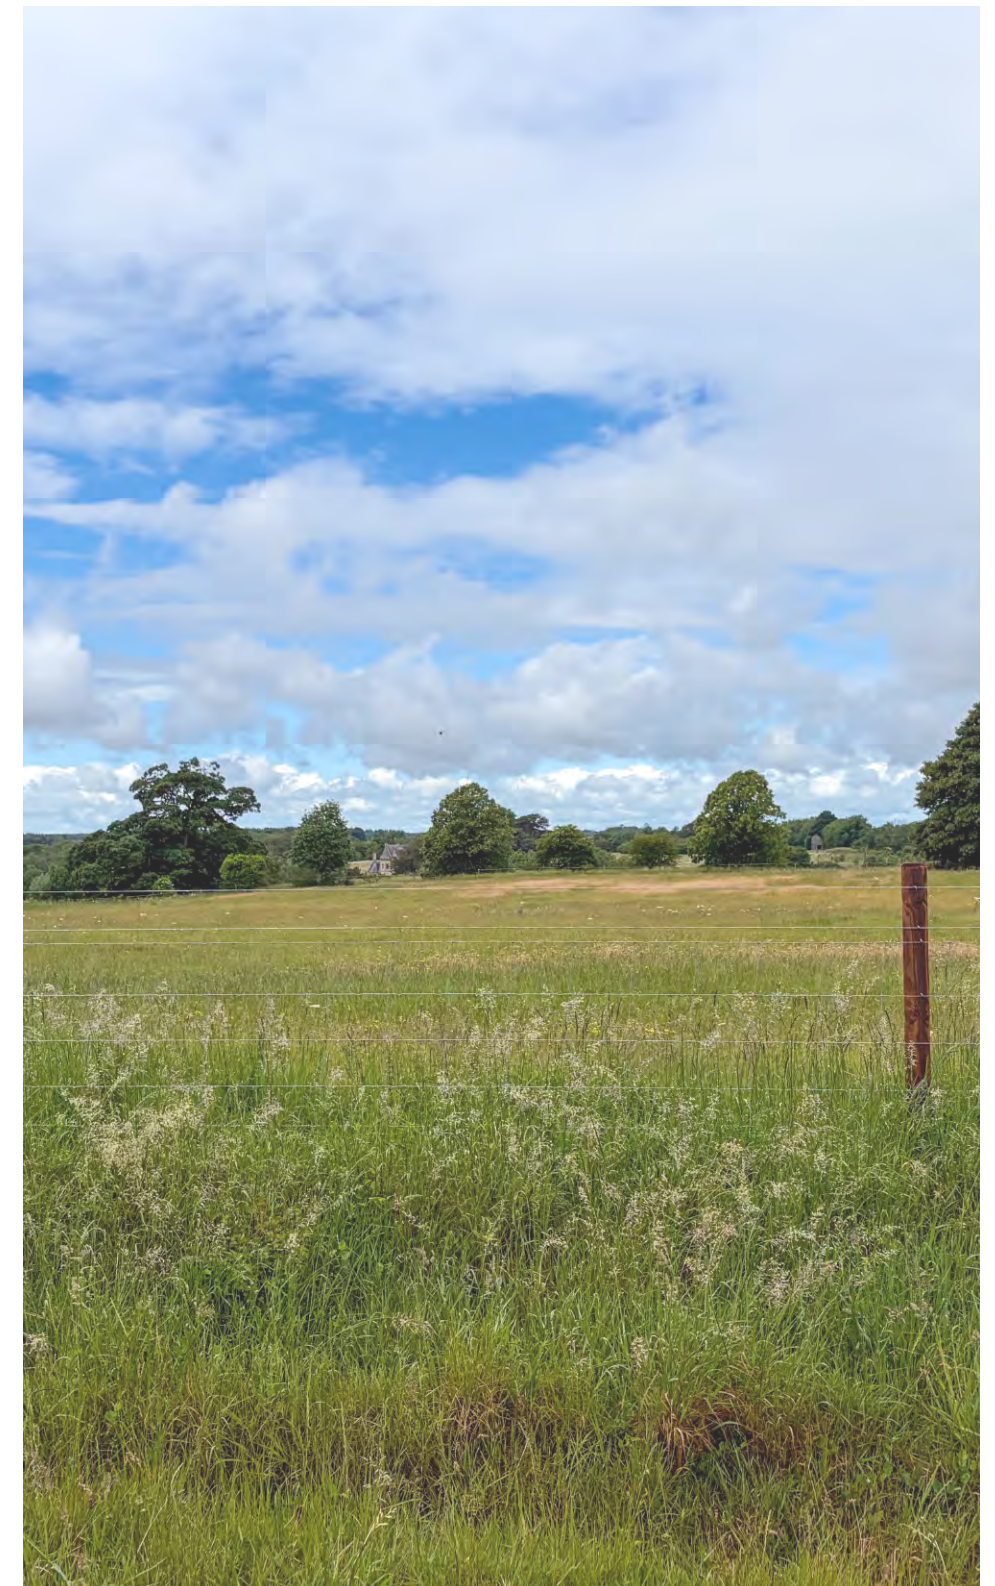

Section 2

Approach.

2 | Approach

- 2.1 The Local Landscape Character Areas (LLCAs) were identified to provide further levels of detail, appropriate and proportionate to the scale of the proposed development.
- 2.2 Published landscape character assessments were reviewed to assist in the initial identification of the LLCA boundaries, qualities, elements and key characteristics of individual landscape character areas. Fieldwork surveys were undertaken by qualified and experienced landscape architects to review the boundaries and key characteristics defined in the published landscape character assessments and to identify, record and map features and characteristics of the landscape.
- 2.3 Twenty LLCAs were identified across the search area established as 2km offset from the Order Limits. Five of the LLCAs fall within Works Area 1, Works Area 2 and Works Area 3, this is the above ground infrastructure, and were reviewed in detail.
- 2.4 The findings of this landscape character study were used to inform the design response incorporated within the Landscape Parameter Plan (July 2026), included in Section 5 of this document, and further recommendations for the landscape proposals and maintenance. This provides a key link between the district scale landscape character assessment presented in the Landscape and Visual Impact Assessment (PINS Ref: EN010147) and the landscape zones identified within the Outline Landscape and Ecology Management Plan (PINS Ref: EN010147).

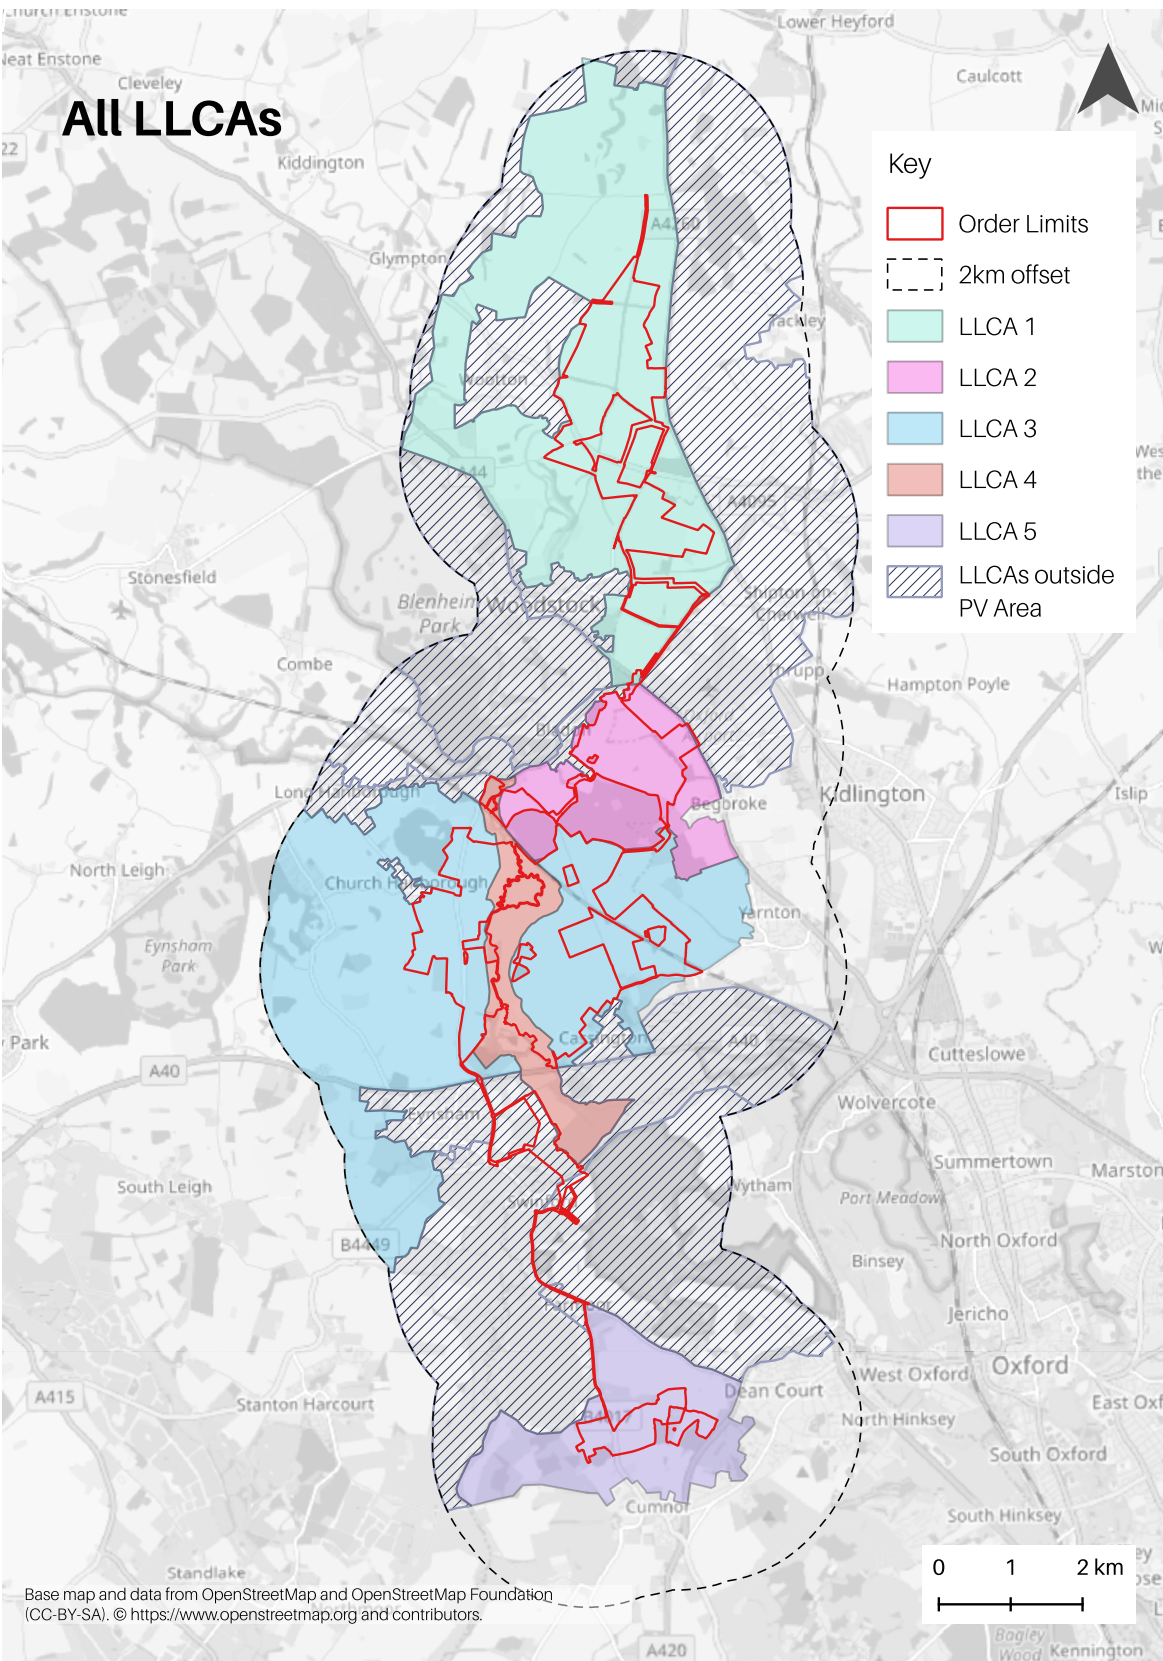


Figure 2.1: All LLCAs

Section 3

Local Landscape Character & Design Response

3 | Local Landscape Character & Design Response

LLCA 1 - Estate Farmland of Dorn Valley

3.1 LLCA 1 has been derived from the Eastern Parks and Valleys Landscape Character Area (LCA) defined by West Oxfordshire District Council (WODC), in the West Oxfordshire Landscape Assessment 1998.

3.2 As shown on Figure 3.1, LLCA 1 covers a small eastern section of the broader district area, with the boundaries defined by:

- Barton Abbey parkland to the north;
- the A2460 to the east;
- Upper Campsfield Road to the south;
- the western slopes of the River Dorn to the west; and
- Wootton and its setting is excluded from the LLCA.

Landscape Character

3.3 Undulating landscape formed by the valleys of River Dorn and River Glyme with a strong landscape pattern of geometric fields typical of the estate farmland. Hedgerows and mature trees mark the field boundaries. Dense vegetation along the River Dorn includes pockets of woodland, some of which are defined as ancient woodland.

The key landscape characteristics are:

- The topography of the area is influenced by the strongly meandering River Dorn, flowing north to south and River Glyme flowing west to east. The river plain lies at approximately 80m AOD. The valley slopes rise rapidly to approximately 120m AOD. The western slope of the River Dorn rises gradually, enabling stronger visual exposure in cross valley views;
- A strong vegetation pattern across the LLCAs, comprising hedgerows and mature trees that mark the field boundaries and dense vegetation along the River Dorn, including pockets of woodland at the river bends, including areas of ancient woodland;

- Medium to small size fields are predominantly arable, with a small addition of pastoral use. The rectilinear pattern of fields reflects historic estate land management practices;
- Scheduled monuments are scattered throughout the area emphasising the historic influence within the area;
- Frequent PRow and the Oxfordshire Way Long Distance Route provide recreational opportunities and access across the area;
- Farmsteads are sparsely scattered mainly along the rivers;
- The area is generally connected by a network of rural lanes and roads although the A4260 is a busy road that reduces tranquillity; and
- There is a sense of remoteness and tranquillity away from the A4260.

Landscape sensitivity

3.4 The sensitivities of LLCA 1 relate to the strong vegetation pattern, historic landscape pattern of fields, river valleys and exposure on western valley slopes of the River Dorn.

Key qualities at risk:

- Retain and enhance the strong vegetation pattern of hedgerows and trees forming field boundary vegetation and small blocks of woodland along the river valleys.
- Retain the historic pattern of geometric fields relating to the historic estate land management.
- Avoid introduction of conspicuous development on the exposed valley slopes.
- Protect the setting of Wootton.

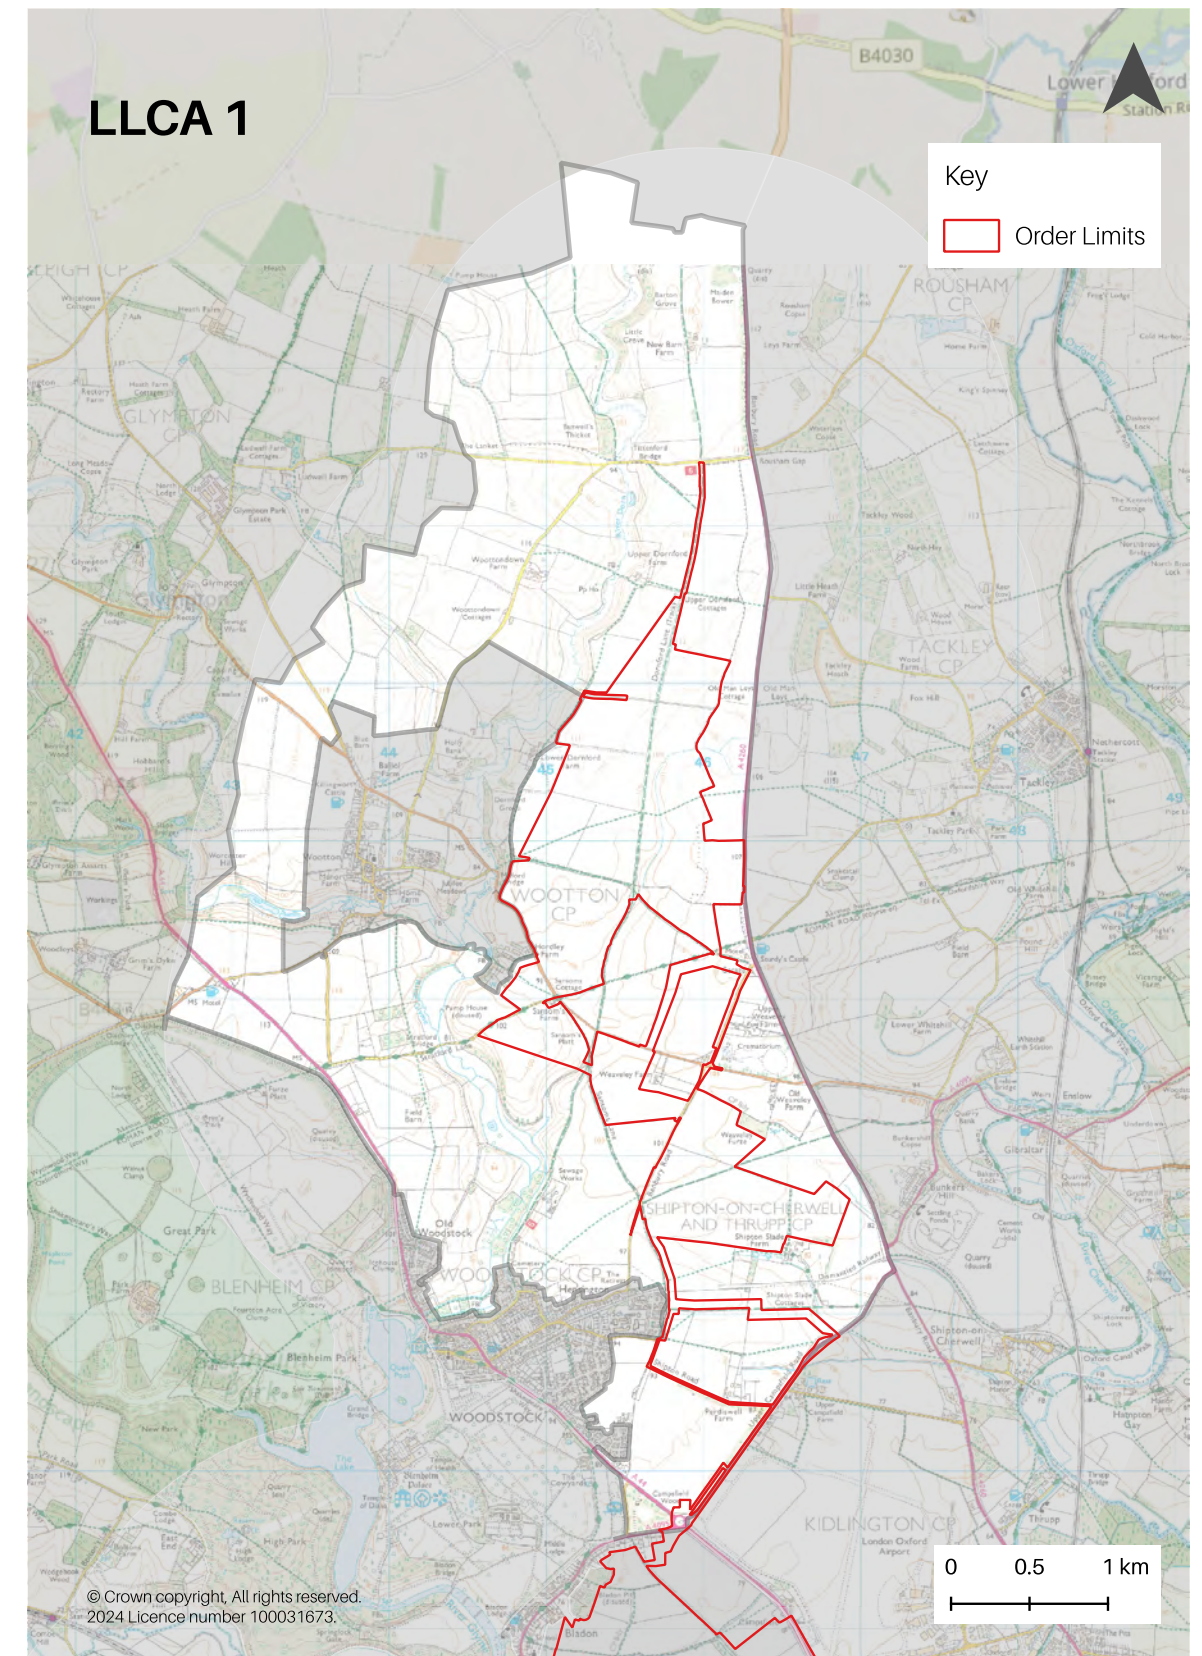


Figure 3.1: LLCA1

3 | Local Landscape Character & Design Response

LLCA 1: Design Response

Revised Design Response

- ① The proposed development is carefully sited across the plateau, and avoids the steep slopes of the river valley and the valley floor.
- ② The proposed development avoids the historic settlement of Wootton and its immediate setting.
- ③ The proposed PV Panel areas are integrated within the rectilinear pattern of fields, which preserves the existing field boundary vegetation and reduces the extent of potential vegetation loss during the construction stage.
- ④ The proposed development retains and enhances the existing vegetation pattern by gapping-up the hedgerows and proposing new hedgerows and trees.
- ⑤ The proposed development avoids the scheduled monuments and direct impacts on the historic value of the area.

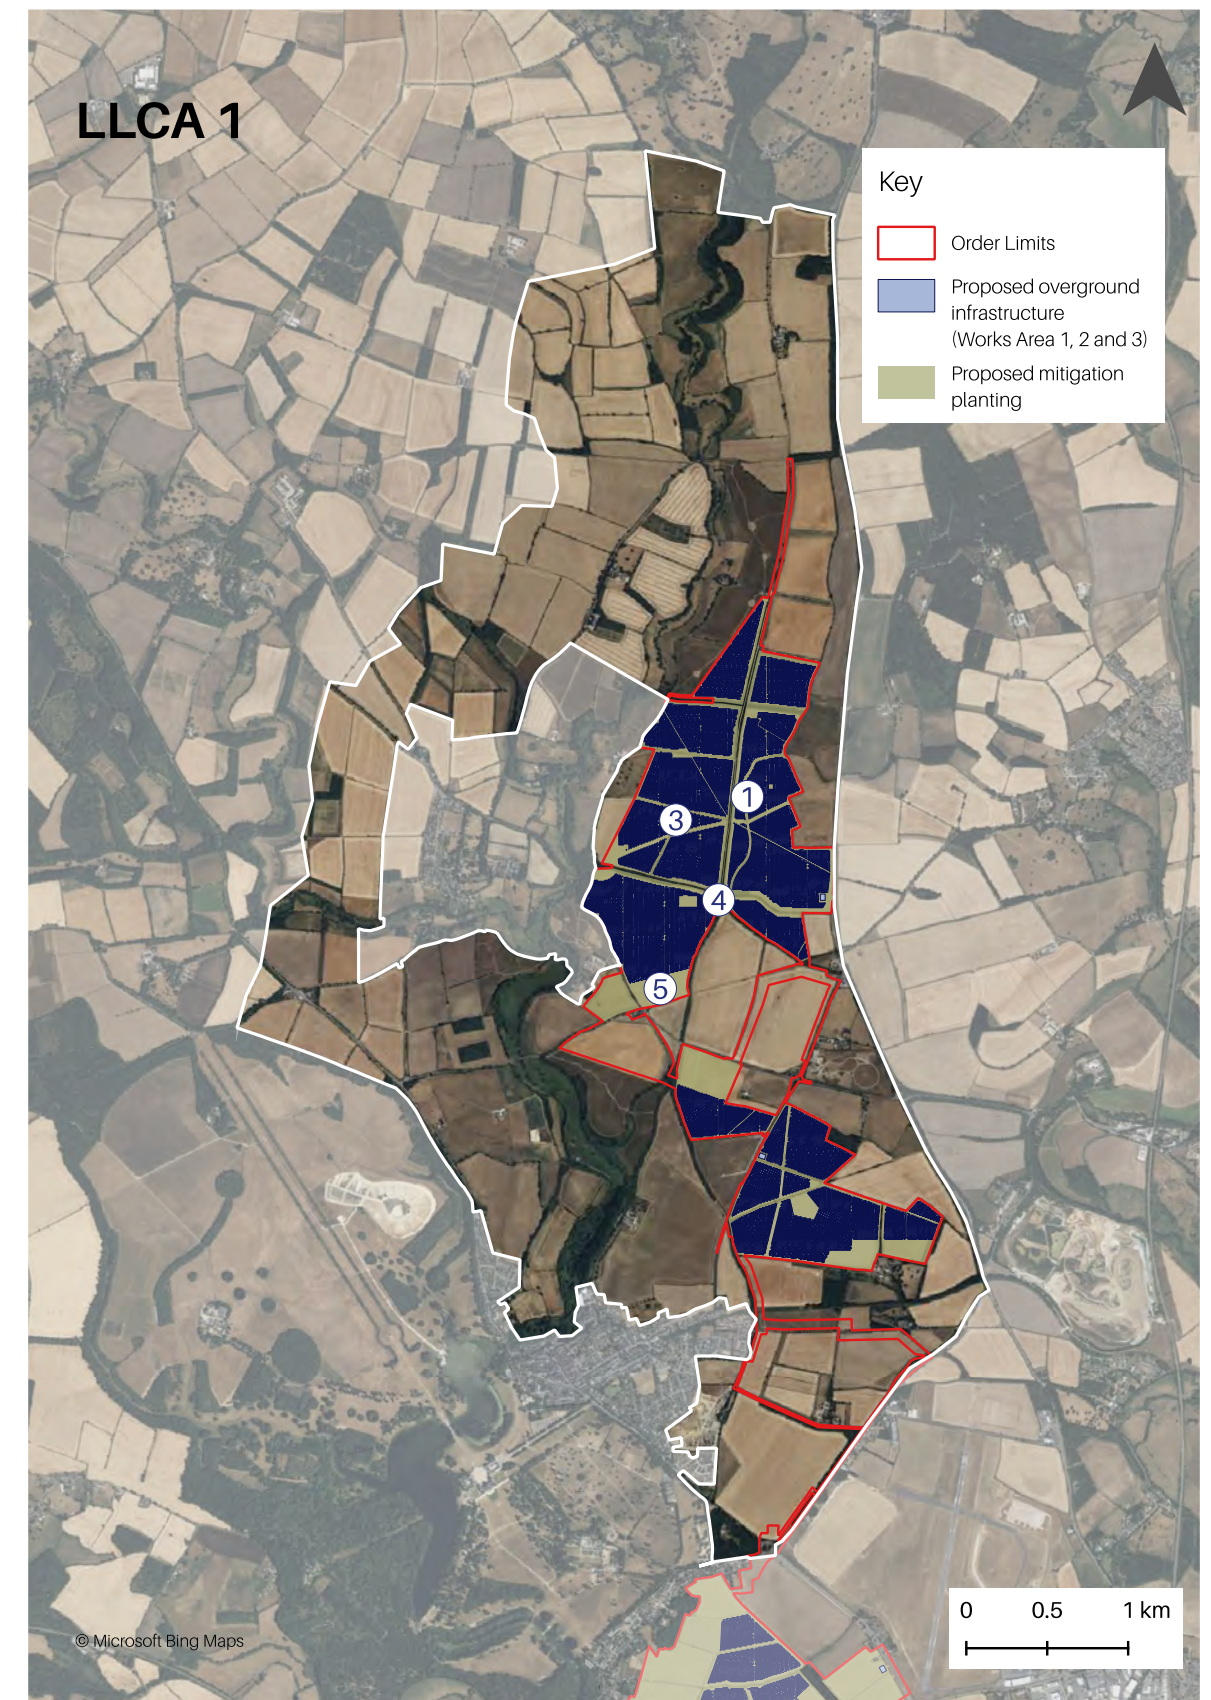


Figure 3.2: Illustrative design response to LLCA 1.

3 | Local Landscape Character & Design Response

LLCA 2 - Wooded Farmland

3.5 LLCA 2 has been primarily derived from the Eynsham Vale Landscape Character Area (LCA) defined by West Oxfordshire District Council, which is described as follows: “the typical character of this area is defined by its low-lying and gentle relief and the patchwork of large, regularly shaped fields and comparatively strong structure of hedgerows and trees”.

3.6 As shown on Figure 3.3, LLCA 2 covers the eastern section of the broader district area, with the boundaries defined by:

- The A44 (Woodstock Road) to the north-east;
- Large woodland blocks of Begbroke Wood, Bladon Heath and Burleigh Wood the south; and
- Settlement of Bladon and Main Road to the north-west.

Landscape Character

3.7 Smaller scale enclosed landscape, with large blocks of woodland to the south. Small to medium size agricultural fields bound by largely intact hedgerows and trees. Visually enclosed with limited views of the wider landscape. Association with built development including Bladon and a busy main road (A44) to the east with open larger agricultural fields adjacent to the road.

The key landscape characteristics are:

- The topography of the LLCA is defined by the slopes rising from approximately 75m AOD along Bladon and Main Road, to form two hills that plateau at approximately 102m AOD at Burleigh Wood and 111m AOD at Ladon Heath;
- Rising topography and large blocks of woodland create a semi-enclosed landscape character that affords some intervisibility across the hill slopes and to the east across low lying landscape;
- The primary land use is agriculture featuring small to medium size arable and pastoral fields. Hedgerows and hedgerows with trees form field boundaries.

Farmsteads are scattered across the area;

- Large blocks of ancient woodland including Begbroke Wood, Bladon Heath and Burleigh Wood indicate the historic landscape pattern;
- There are some listed buildings and a hillfort on Bladon Heath Scheduled Monument contributing to the historic landscape character of the area and impact a sense of time depth;
- There are recreational opportunities across the area, including PROW and Shakespeare’s Way Long Distance Route;
- Traffic along the A44 (Woodstock Road) and aircraft noise related to London Oxford Airport (beyond the LLCA) diminish the sense of tranquillity, especially in the eastern part of the LLCA.
- A railway line severs the western slopes of the LLCA; and
- The LLCA creates a setting to Bladon, a village with a historic core afforded conservation area status.

Landscape sensitivity

3.8 The sensitivities of LLCA 4 relate to the historic landscape pattern of the fields bound by hedgerows and hedgerows with trees, large blocks of ancient woodland and heritage assets including the listed buildings and Bladon Heath scheduled monument.

Key qualities at risk:

- Conserve and enhance the historic pattern of field and hedgerows.
- Conserve the ancient blocks of woodland and implement an appropriate offset.
- Avoid conspicuous development structures, exposed on the slopes of rising topography.
- Protect the setting of Bladon.

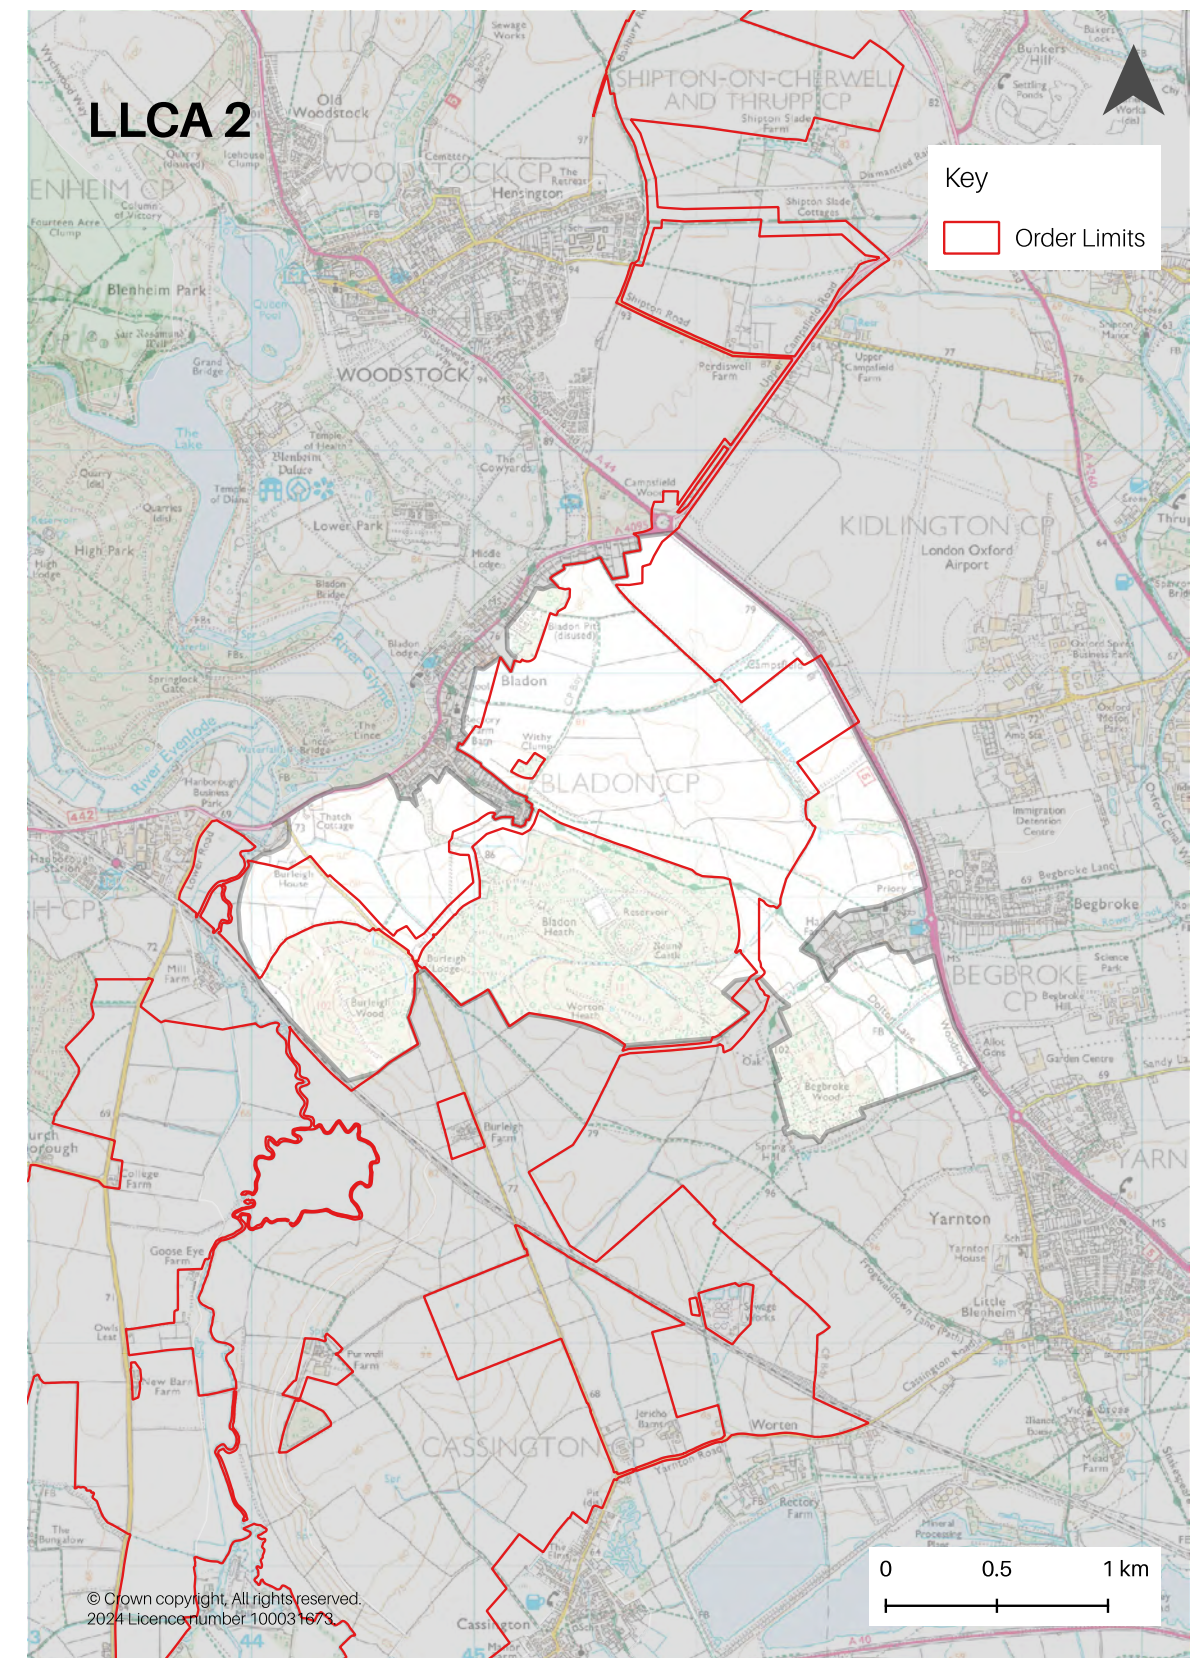


Figure 3.3: LLCA 2.

3 | Local Landscape Character & Design Response

LLCA 2: Design Response

Revised Design Response

- ① The proposed development is carefully sited across low-lying parts of the LLCA and contained by the existing woodland blocks to reduce exposure.
- ② The proposed PV Panel areas are integrated within the rectilinear pattern of fields, thereby minimising the extent of potential vegetation loss during the construction stage.
- ③ The proposed development retains and enhances the existing vegetation pattern by gapping-up the hedgerows and proposing new hedgerows and trees. An offset from the ancient woodland blocks is embedded to provide a buffer for wildlife and habitat.
- ④ The proposed development is offset from the development of Bladon to protect the setting of the village.
- ⑤ An offset is provided from the PRow and Shakespeare's Way Long Distance Route to protect the recreational opportunities within the LLCA.

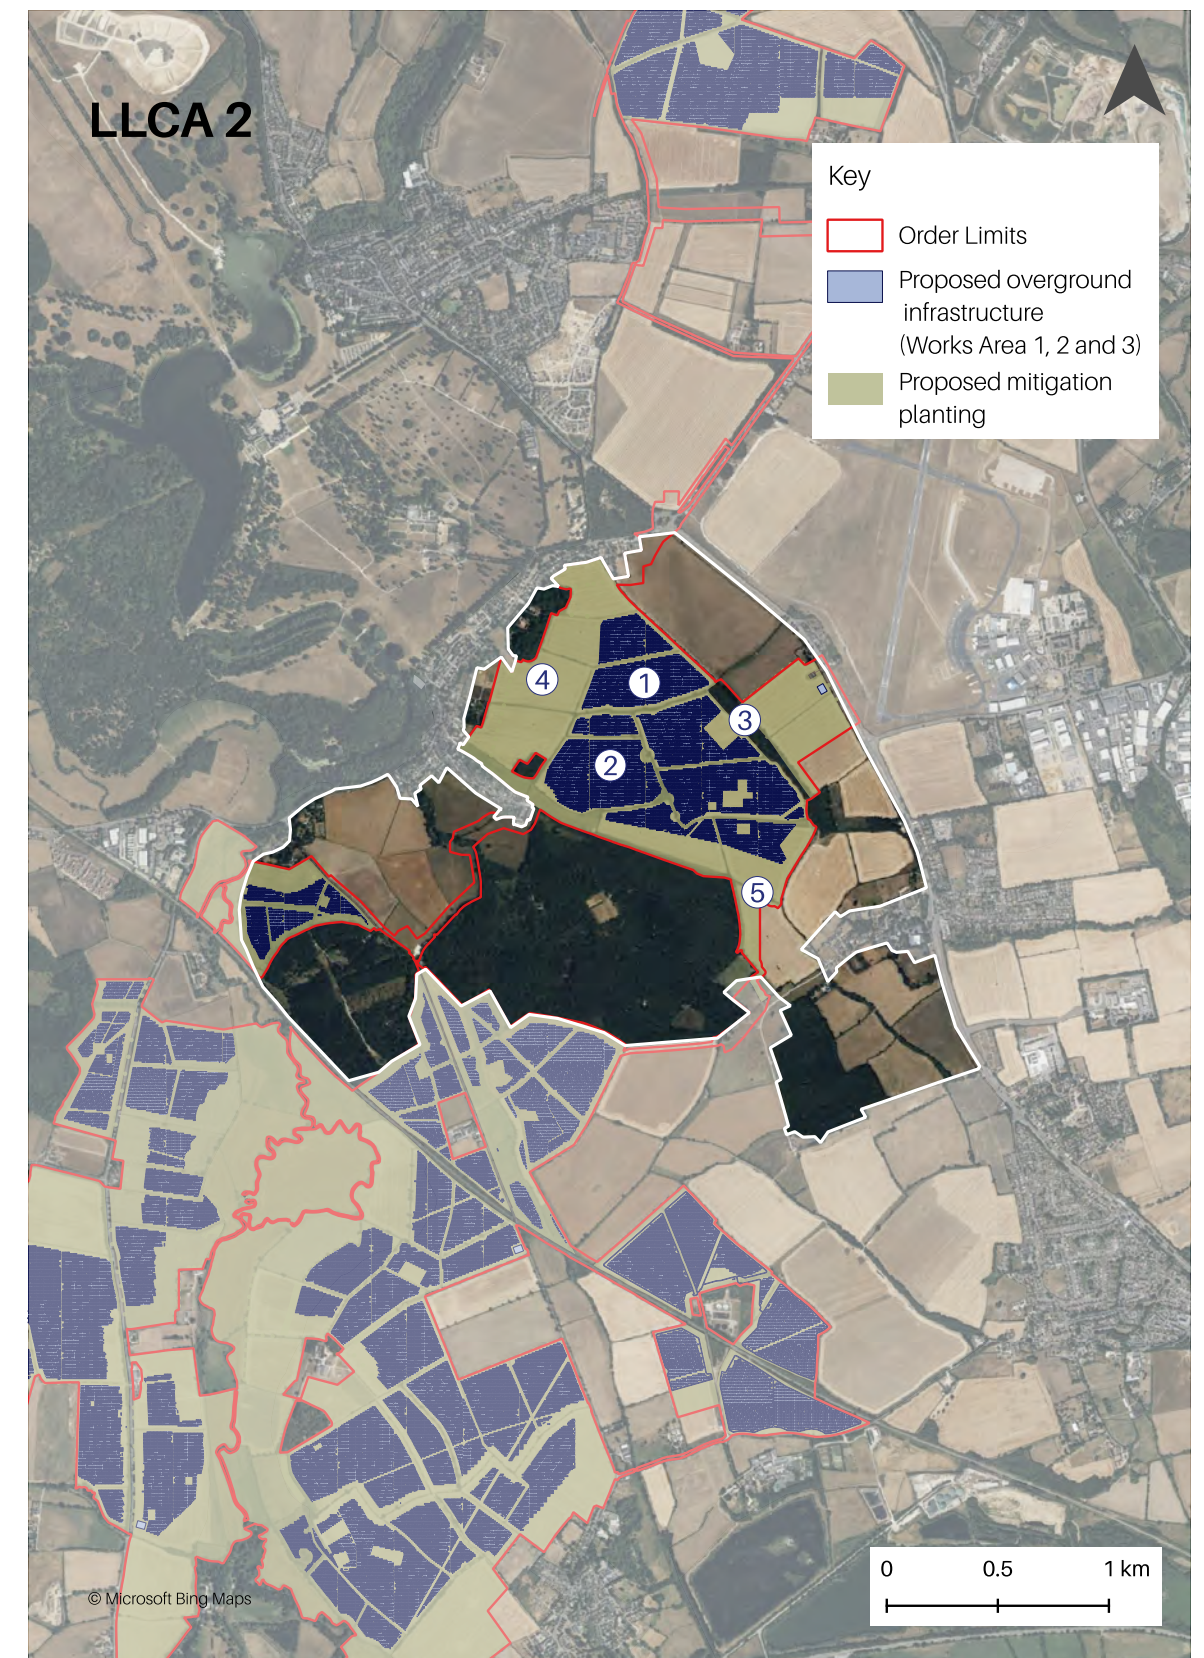


Figure 3.4: Illustrative design response to LLCA 2.

3 | Local Landscape Character & Design Response

LLCA 3 - Estate Farmland

3.9 LLCA 3 has been derived from the Eynsham Vale LCA defined by West Oxfordshire District Council in the West Oxfordshire Landscape Assessment 1998.

3.10 As shown on Figure 3.5, LLCA 3 covers the eastern section of the broader district area, with the boundaries defined by:

- crests of the hills with large blocks of woodland to the north;
- the A44 Woodstock Road to the east;
- Cassington Road, Cassington, the A40 and western edges of Eynsham to the south; and
- elevated land near Freeland to the west.

Landscape Character

3.11 An open, undulating landscape enabling long distance cross valley views. Typical estate farmland with a strong landscape pattern of hedgerows, trees, belts of trees and copses resulting in the perception of a well-vegetated landscape.

The key landscape characteristics are:

- Undulating topography ranges from approximately 65m AOD in the valleys to approximately 100m AOD at hill crests, creating a sense of openness and enabling long distance cross valley views;
- The landscape comprises open farmland, divided into medium to small scale arable fields, with additions of pastoral land;
- Across the eastern side of the LLCA, hedgerows and hedgerows with trees form rectilinear boundaries of medium to small scale fields;
- The vegetation pattern on the western side of the LLCA comprises hedgerows frequently featuring mature trees, belts of trees and copses typical of the estate farmland. A large proportion of the field boundaries are irregular due to the meandering watercourse cutting

into the slopes;

- Pinsley Wood is a large ancient woodland, emphasising the historic landscape pattern;
- There are a few scattered farmsteads, some of which are listed heritage assets emphasising the historic value of the area;
- There are good recreational opportunities across the area, including the Shakespeare's Way Long Distance Route;
- The area is dissected by a network of rural lanes and the railway line. The A40 within the southern periphery of the LLCA reduces the sense of tranquillity; and
- The LLCA creates a setting to Cassington and Church Hanborough, villages with historic character and development focused mainly around the conservation areas.

Landscape sensitivity

3.12 The sensitivities of LLCA 3 relate to the openness of undulating landscape with the field and vegetation pattern typical of the farmland estate.

Key qualities at risk:

- Avoid introduction of conspicuous development on the elevated landform.
- Retain and enhance the strong vegetation pattern of hedgerows, trees, belts of trees and copses typical of the estate farmland.
- Protect the setting of the historic villages.

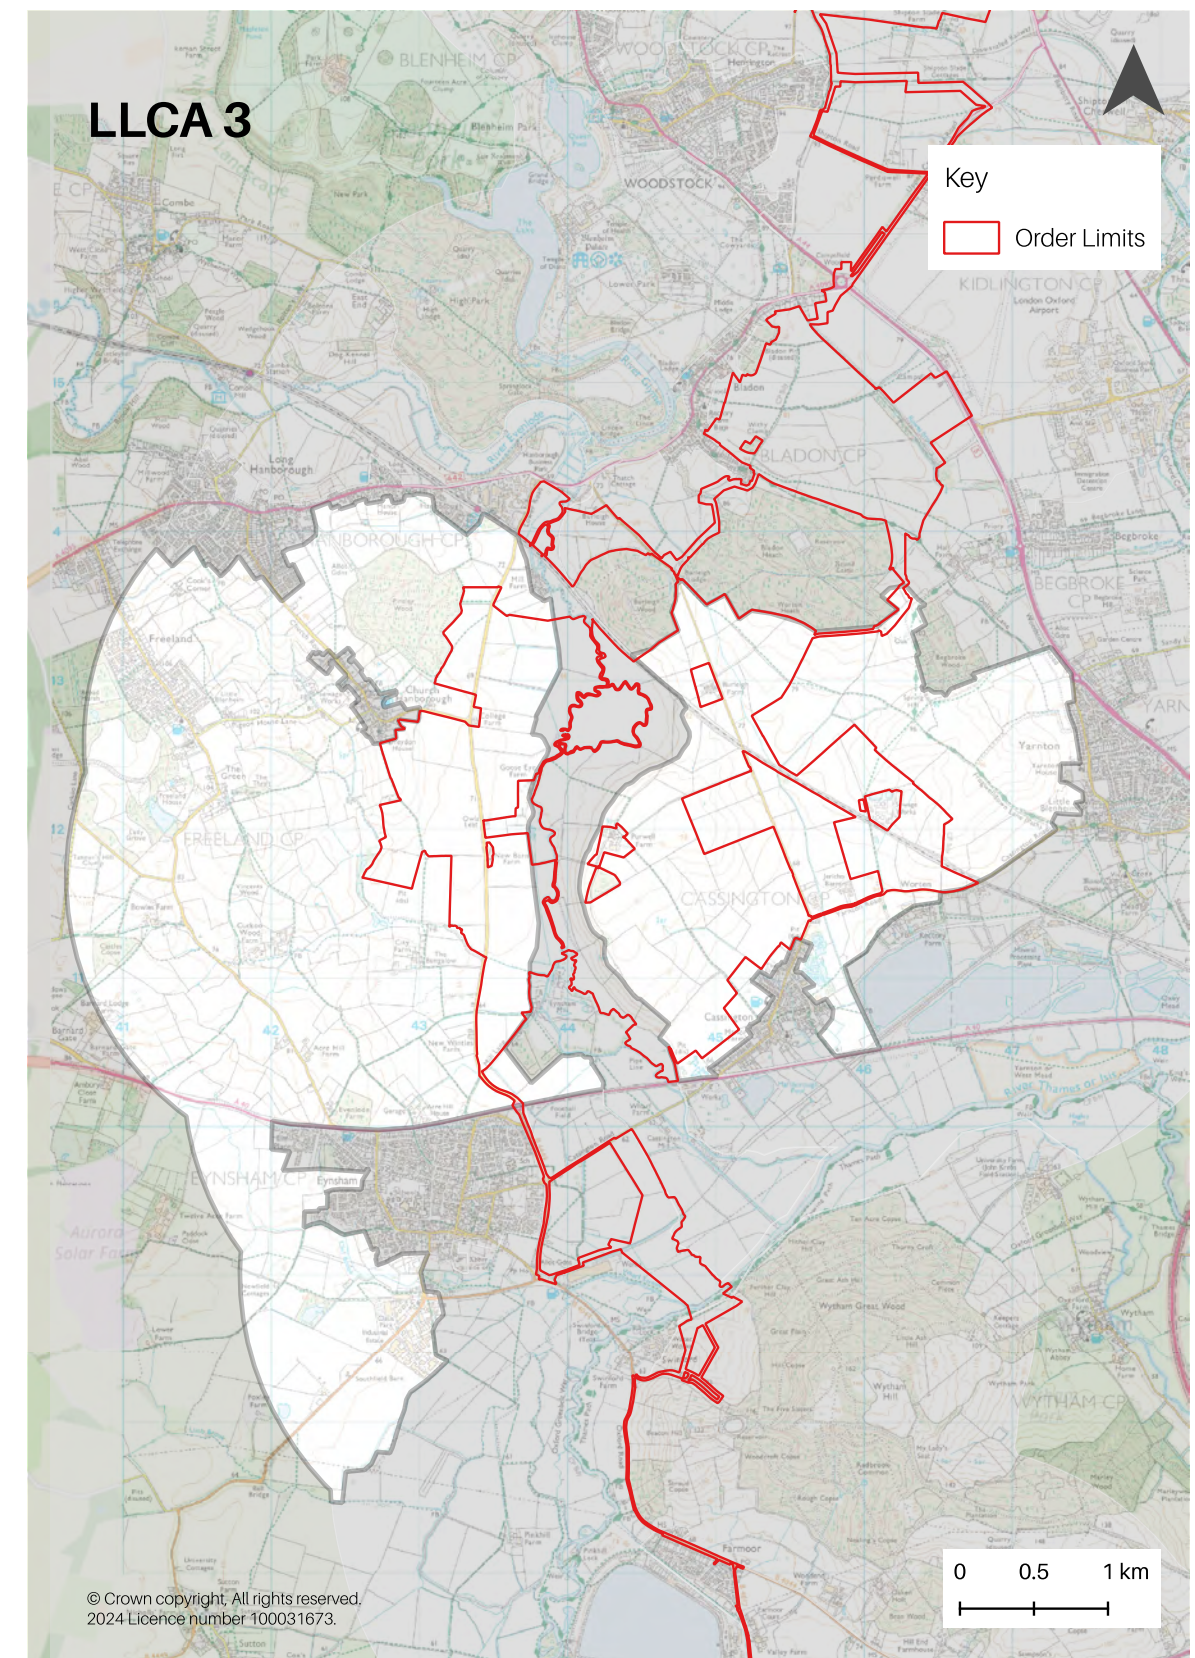


Figure 3.5: LLCA 3.

3 | Local Landscape Character & Design Response

LLCA 3: Design Response

Revised Design Response

- ① A large proportion of the PV Panel infrastructure is proposed to be sited across low-lying areas on the western and eastern peripheries of the LLCA. Part of the proposed development is elevated on Purwell Farm hill, increasing the perception of the proposed development across the LLCA, while the southernmost lower-lying area of the LLCA remains free of the PV Panel infrastructure, thereby reinforcing the distinction between the valley floor and more elevated landform
- ② The proposed PV Panel areas are integrated within the pattern of fields, minimising the extent of potential vegetation loss during the construction stage.
- ③ The proposed development retains and enhances the existing vegetation pattern by gapping-up the hedgerows and proposing new hedgerows and trees. An offset from the ancient Pinsley Wood is embedded to provide a buffer for wildlife and habitat.
- ④ An offset from the farmsteads is proposed to protect their setting.
- ⑤ The proposed development was offset from the development of Cassington and Church Hanborough to protect the setting of the villages and reinforce the sense of place between the settled vale landscape and the elevated landform.

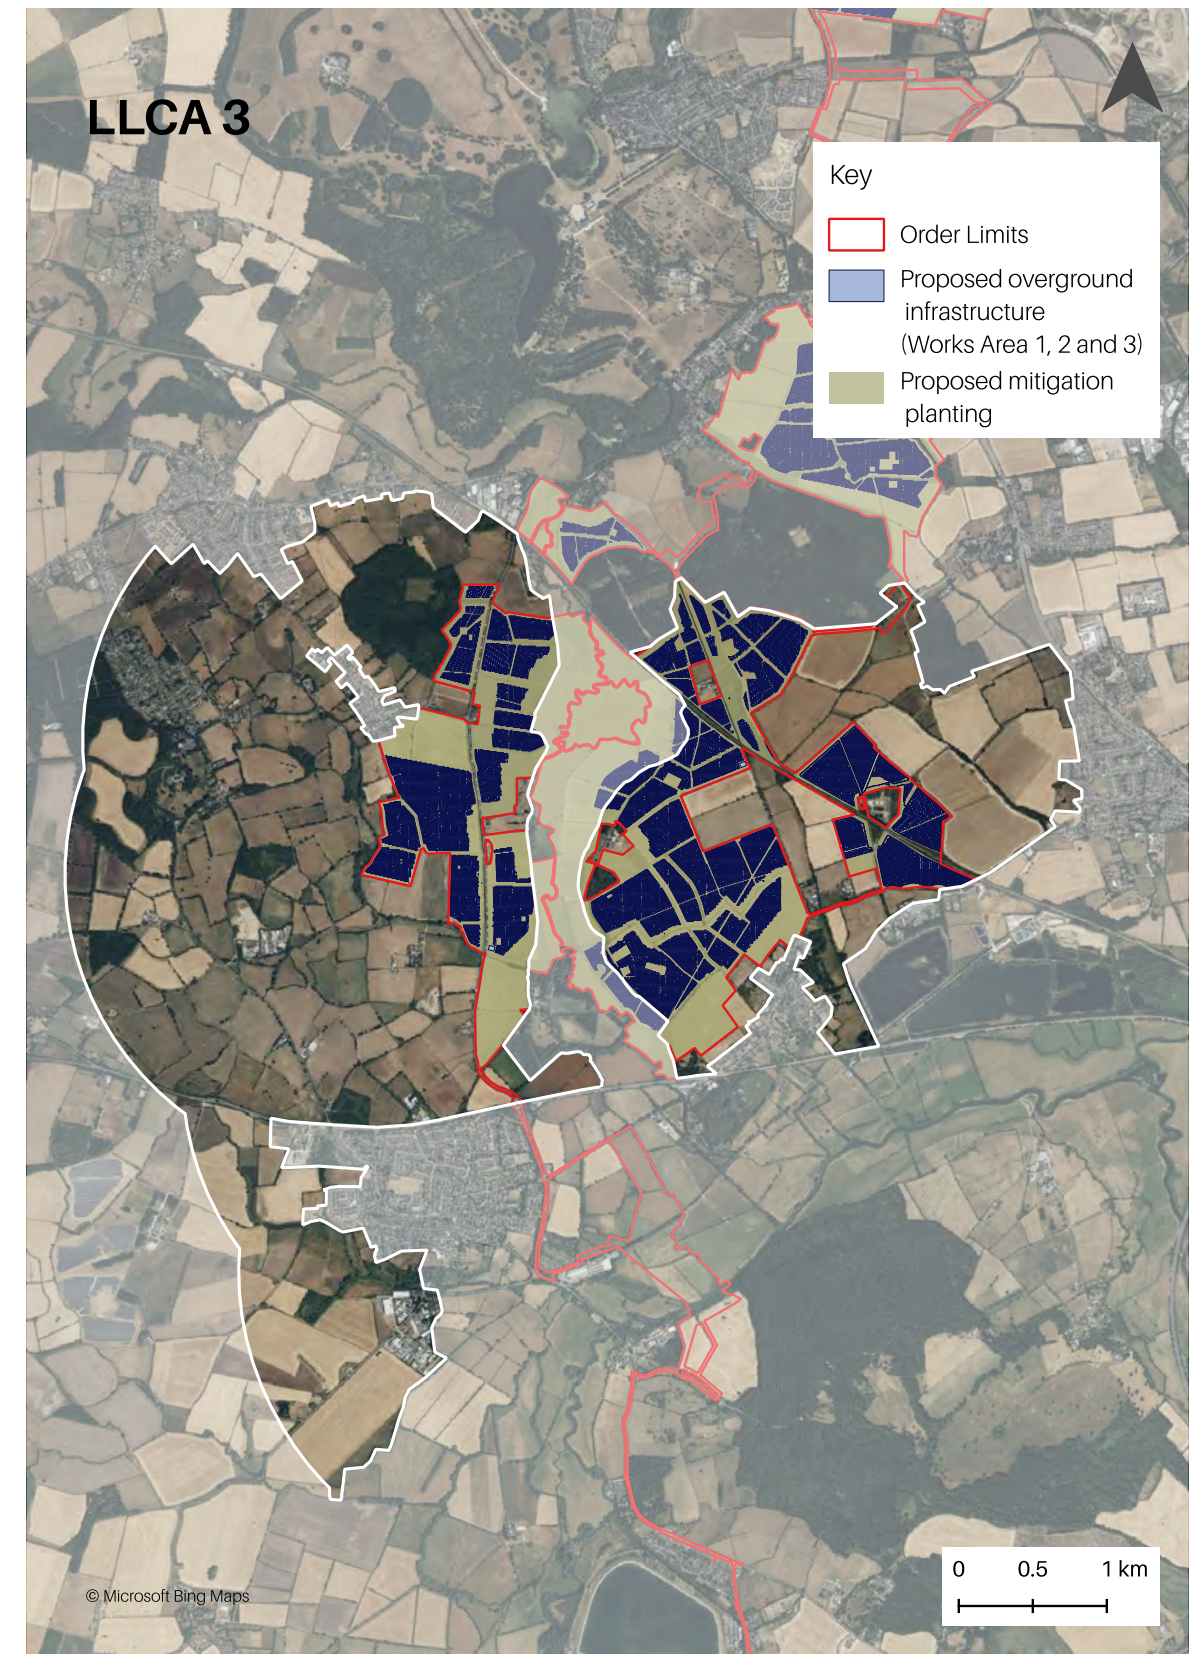


Figure 3.6: Illustrative design response to LLCA 3.

3 | Local Landscape Character & Design Response

LLCA 4 - Evenlode Valley

3.13 LLCA 4 has been derived from the Eynsham Vale LCA and Lower Windrush Valley and Eastern Thames Fringes LCA defined by West Oxfordshire District Council in the West Oxfordshire Landscape Assessment 1998.

3.14 As shown on Figure 3.7, LLCA 4 covers the eastern parts of the broader district areas, with the boundaries defined by:

- the A4095 (Main Road) to the north;
- the rising valley side to the east;
- the River Thames to the south; and
- a low-lying floodplain to the west.

Landscape Character

3.15 An open valley landscape defined by the strongly meandering River Evenlode, lined with riparian vegetation and sparse groups of trees. The rapidly rising topography of the eastern valley slope results in increased visual exposure. Historic mills are dotted along the river and indicate the former industrial land uses within the valley and lend a sense of time depth.

The key landscape characteristics are:

- Open valley of strongly meandering River Evenlode, lined with riparian vegetation and sparse groups of trees;
- Valley of the River Evenlode with its low-lying floodplain at approximately 65m AOD and steep eastern slope rising up to 80m AOD, resulting in a sense of openness and visual exposure of the eastern slope;
- Irregular grassland and pastoral fields stretch across the floodplain. Regular pastoral and arable fields bound by hedgerows are elevated on the eastern slope of the valley;
- Historic network of mills along the river including Grade II listed Mill Farm, Grade II listed Eynsham Mill, with bridges and ponds, surrounded by dense vegetation

following the irregular river, Cossington Mill, which together emphasise the historic and industrial value of the landscape and sense of time depth;

- There are limited recreational opportunities across the LLCA;
- There are a few scattered farmsteads; and
- There is a sense of remoteness and tranquillity away from the A4095 (Main Road) and the A40.

Landscape sensitivity

3.16 The sensitivities of LLCA 2 relate to the meandering River Evenlode and its associated floodplain with grassland, pastoral fields and network of the historic mill infrastructure. .

Key qualities at risk:

- Conserve the meandering river floodplain with historic mill infrastructure.
- Retain the areas of floodplain pasture, meadows and riparian vegetation and prevent conversion to arable fields.
- Avoid conspicuous development on the exposed valley slope.
- Retain the sense of remoteness and tranquillity away from the A40.

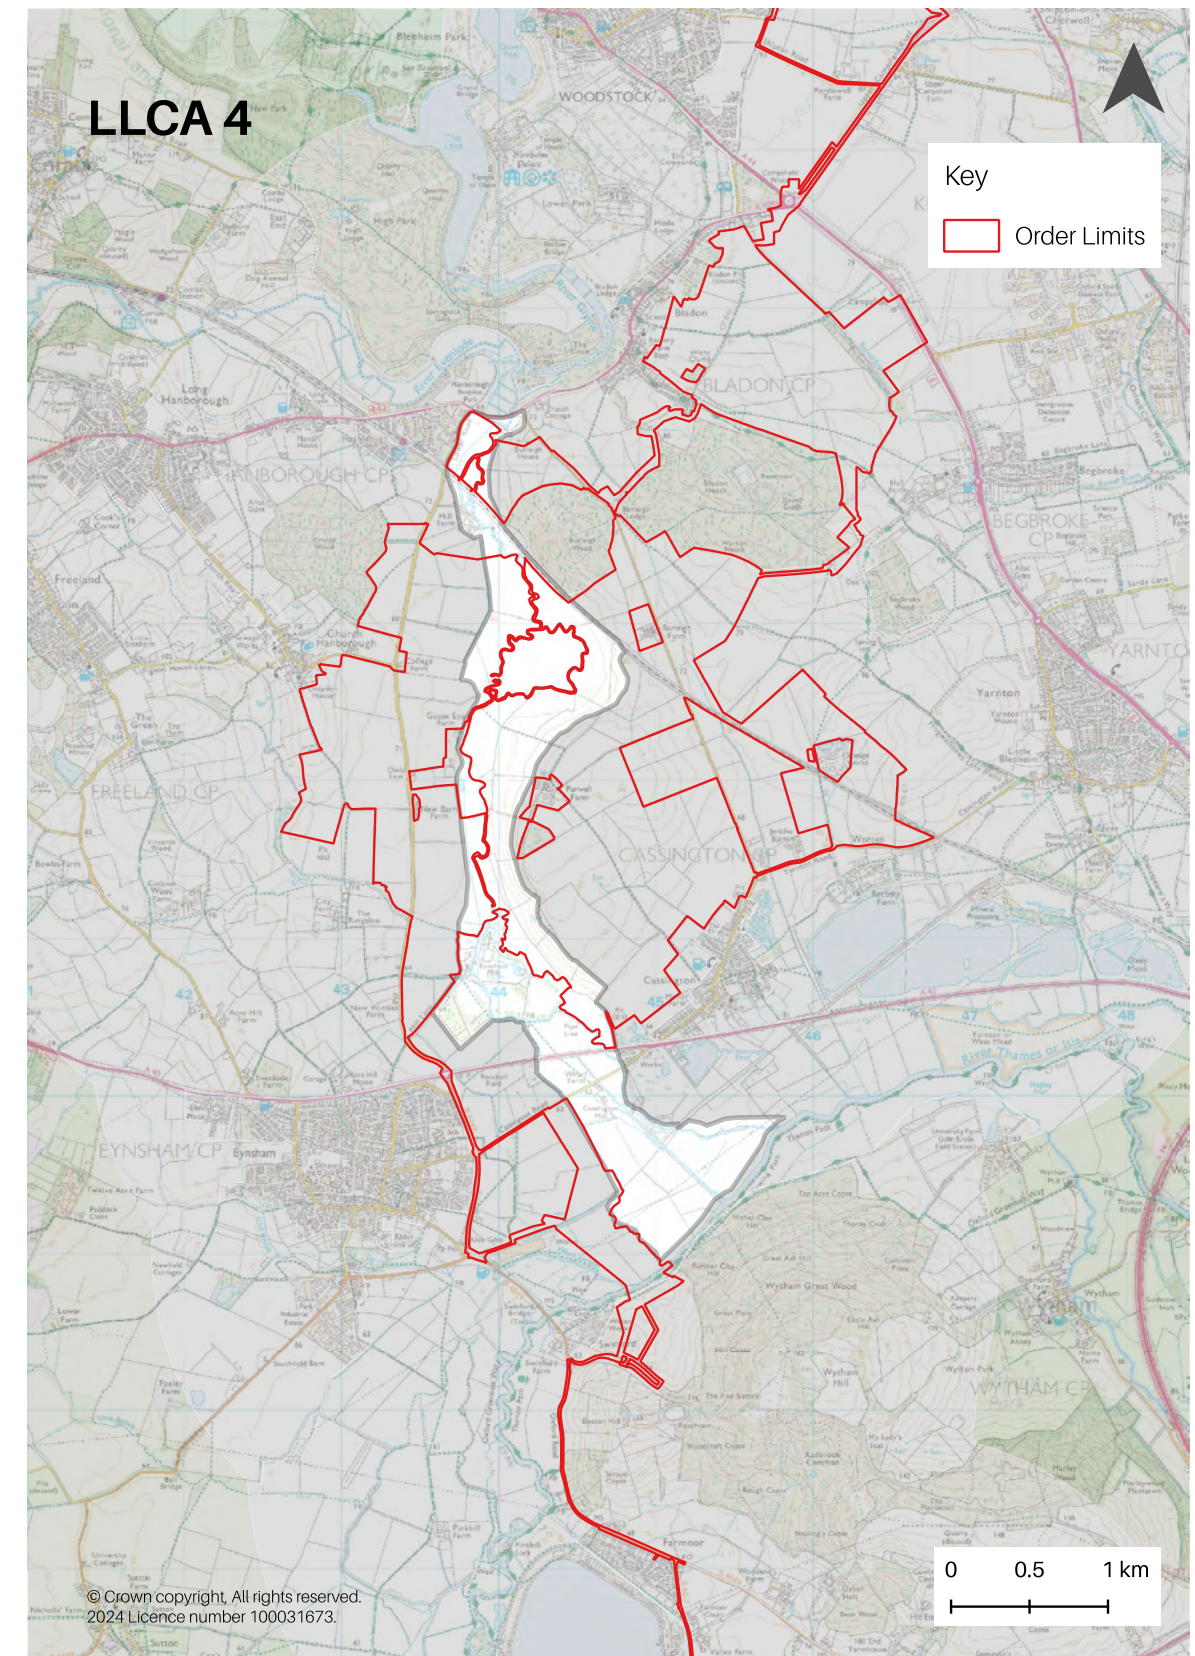


Figure 3.7: LLCA 4.

3 | Local Landscape Character & Design Response

LLCA 4: Design Response

Revised Design Response

- ① The proposed development avoids the sensitive areas of the meandering river floodplain and the eastern valley.
- ② The PV Panel areas are proposed across the southern part of the LLCA, where the proposals are contained by the vegetation.

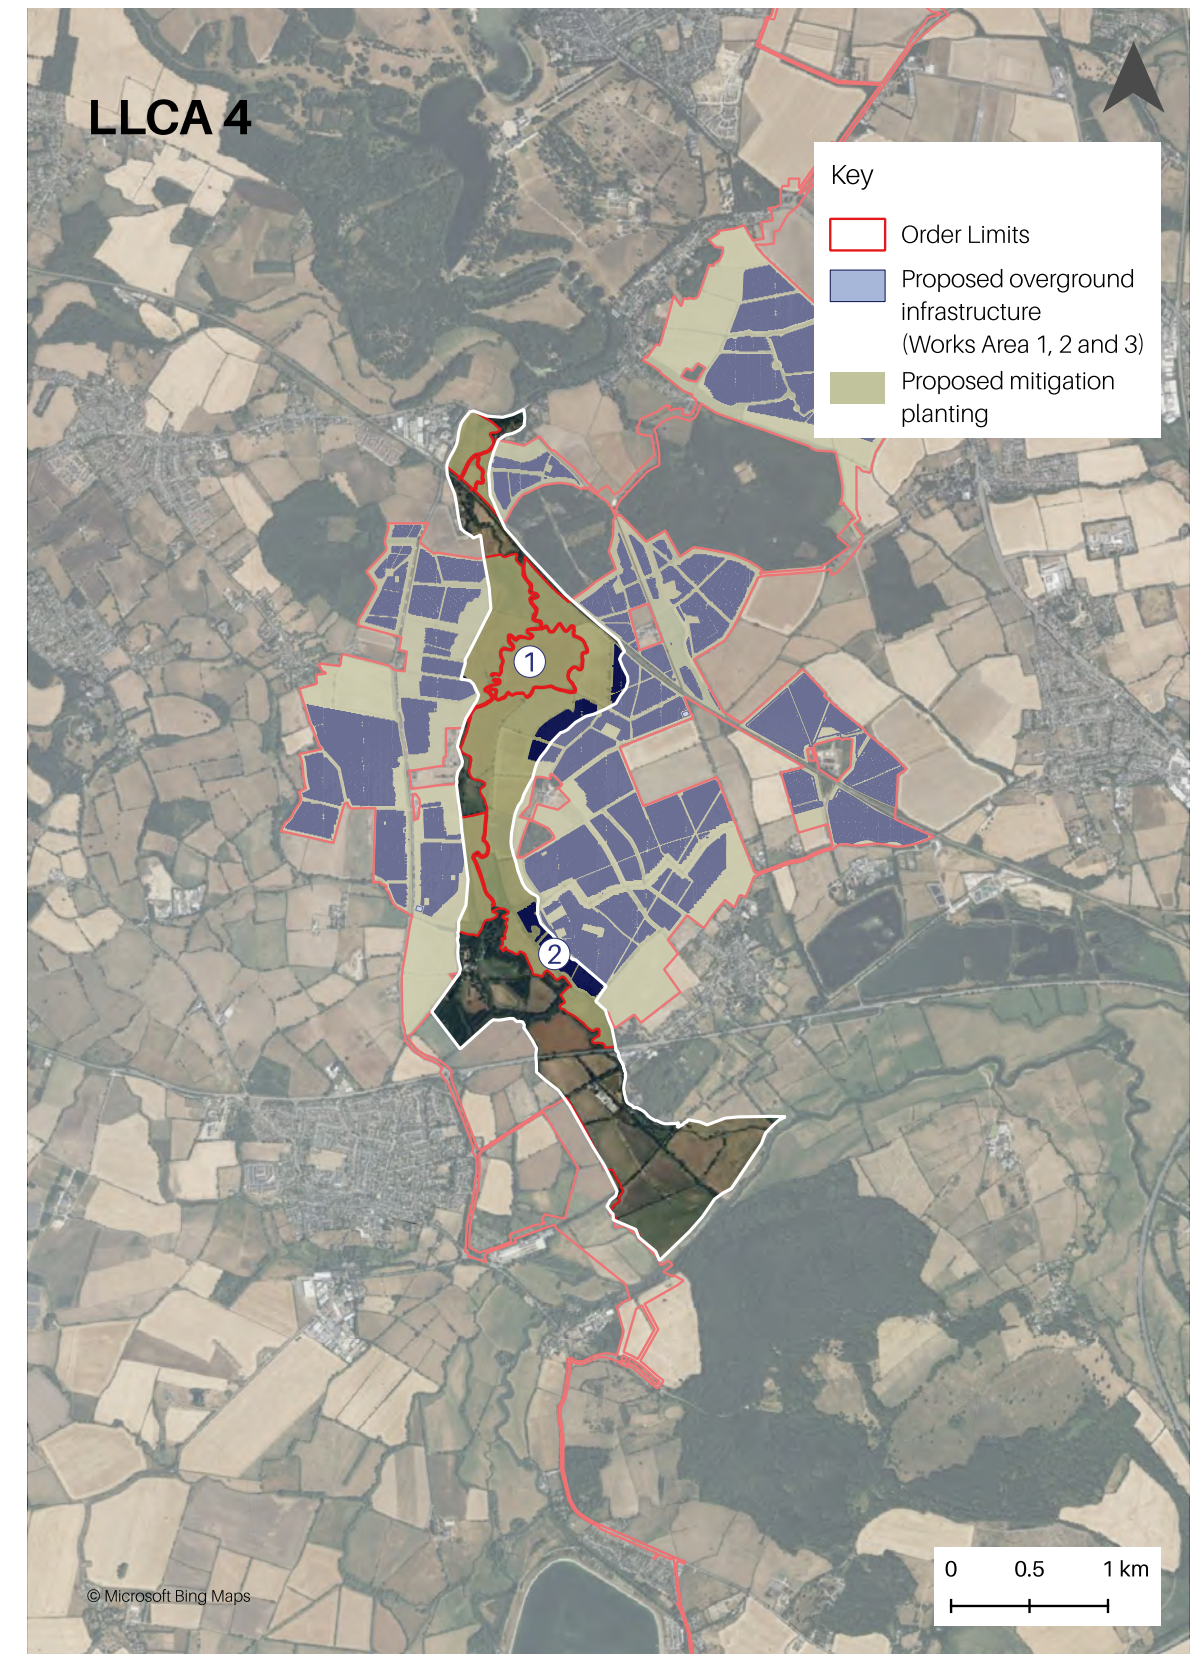


Figure 3.8: Illustrative design response to LLCA 4.

3 | Local Landscape Character & Design Response

LLCA 5 - Tumbledown Ridge

3.17 LLCA 5 has been derived from the LCA LM19: Whitley Copse to Chawley Corallian Limestone Ridge with Woodland and LCA LM20: Farmoor to Botley Corallian Limestone Ridge with Woodland, defined by Vale of White Horse District Council in the Vale of White Horse Landscape Character Assessment (2017).

3.18 As shown on Figure 3.9, LLCA 5 covers the northern section of the broader LCA LM19 and the southern section of LCA LM20. It's boundaries are defined by:

- Eynsham Road to the north;
- the western development edge of Botley to the east;
- Cumnor and Leys Road to the south; and
- the River Thames and Cumnor Road to the west.

Landscape Character

3.19 Strongly influenced by a ridgeline, enabling long distance, panoramic views across a low lying landscape and the wooded Wytham Hill further afield in its broader setting. The area features several scattered small blocks of ancient woodland that contribute to a semi-enclosed character to the west. The A420, pylons and communication mast are prominent detracting landscape features.

The key landscape characteristics are:

- The topography of the area forms a distinctive ridge that reaches approximately 110m AOD near Cumnor, then rapidly falls northwards to 65m AOD near Whitley Copse, Jumpers and Denman's Farm and Whitley Copse. The topography plateaus at approximately 65-60m AOD between the base of the ridge, Eynsham Road to the north and River Thames to the west;
- The steep ridge enables long distance views north across the Thames, Farmoor Reservoir and the wooded Wytham Hill;
- Small blocks of ancient woodland are scattered across the ridge and create a semi-enclosed landscape in the

western part of the LLCA, contributing to the sense of remoteness;

- Medium to small scale primarily arable fields are separated by low hedgerows and create an irregular landscape pattern;
- Scattered farmsteads and small groups of isolated dwellings;
- There are good recreational opportunities across the area including the PRow and Oxford Greenbelt Way Long Distance Route;
- Pylons and communication mast are detracting landscape features;
- The A420 crosses the eastern part of the LLCA and reduces its tranquillity; and
- The character area provides northern setting to Cumnor, including its conservation area and listed buildings that enhance the historic character of the settlement.

Landscape sensitivity

3.20 The sensitivities of the LLCA relate to the topography forming a ridge and enabling panoramic views. There are numerous blocks of ancient woodland, imparting a historic character to the area.

Key qualities at risk:

- Avoid conspicuous development structures, exposed on the ridge.
- Conserve the blocks of ancient woodland and implement an appropriate offset.

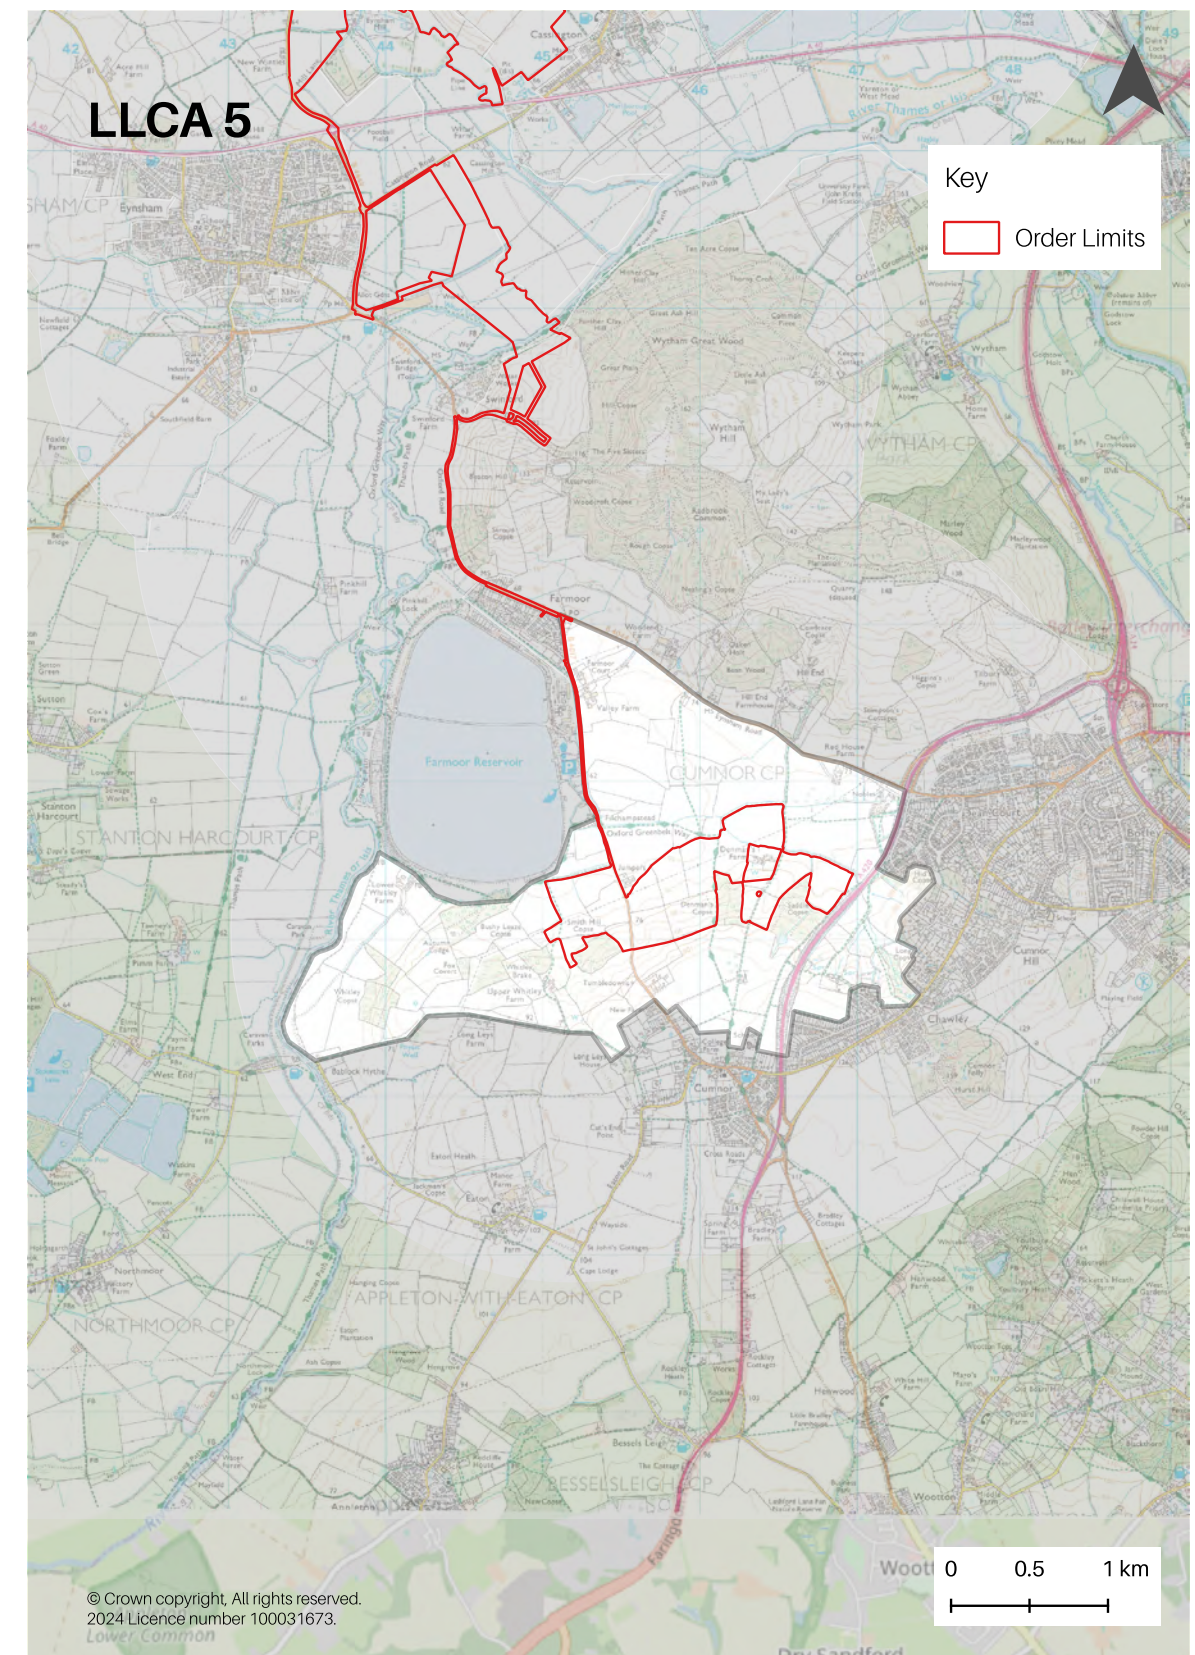


Figure 3.9: Illustrative design response to LLCA 5.

3 | Local Landscape Character & Design Response

LLCA 5: Design Response

Revised Design Response

- ① The PV Panel infrastructure is proposed across low-lying area south of Filchampstead Brook as well as on the lower north-facing slopes of the ridge. The southernmost fieldscape across the LLCA remains free of above ground infrastructure.
- ② The proposed PV Panel areas are integrated within the pattern of fields, minimising the extent of potential vegetation loss during the construction stage.
- ③ An offset from the ancient Saddle Copse and Denman's Copse is embedded to provide a buffer for wildlife and habitat.
- ④ An offset is provided from the PRow and Oxford Greenbelt Way Long Distance Route to protect the recreational opportunities within the LLCA.

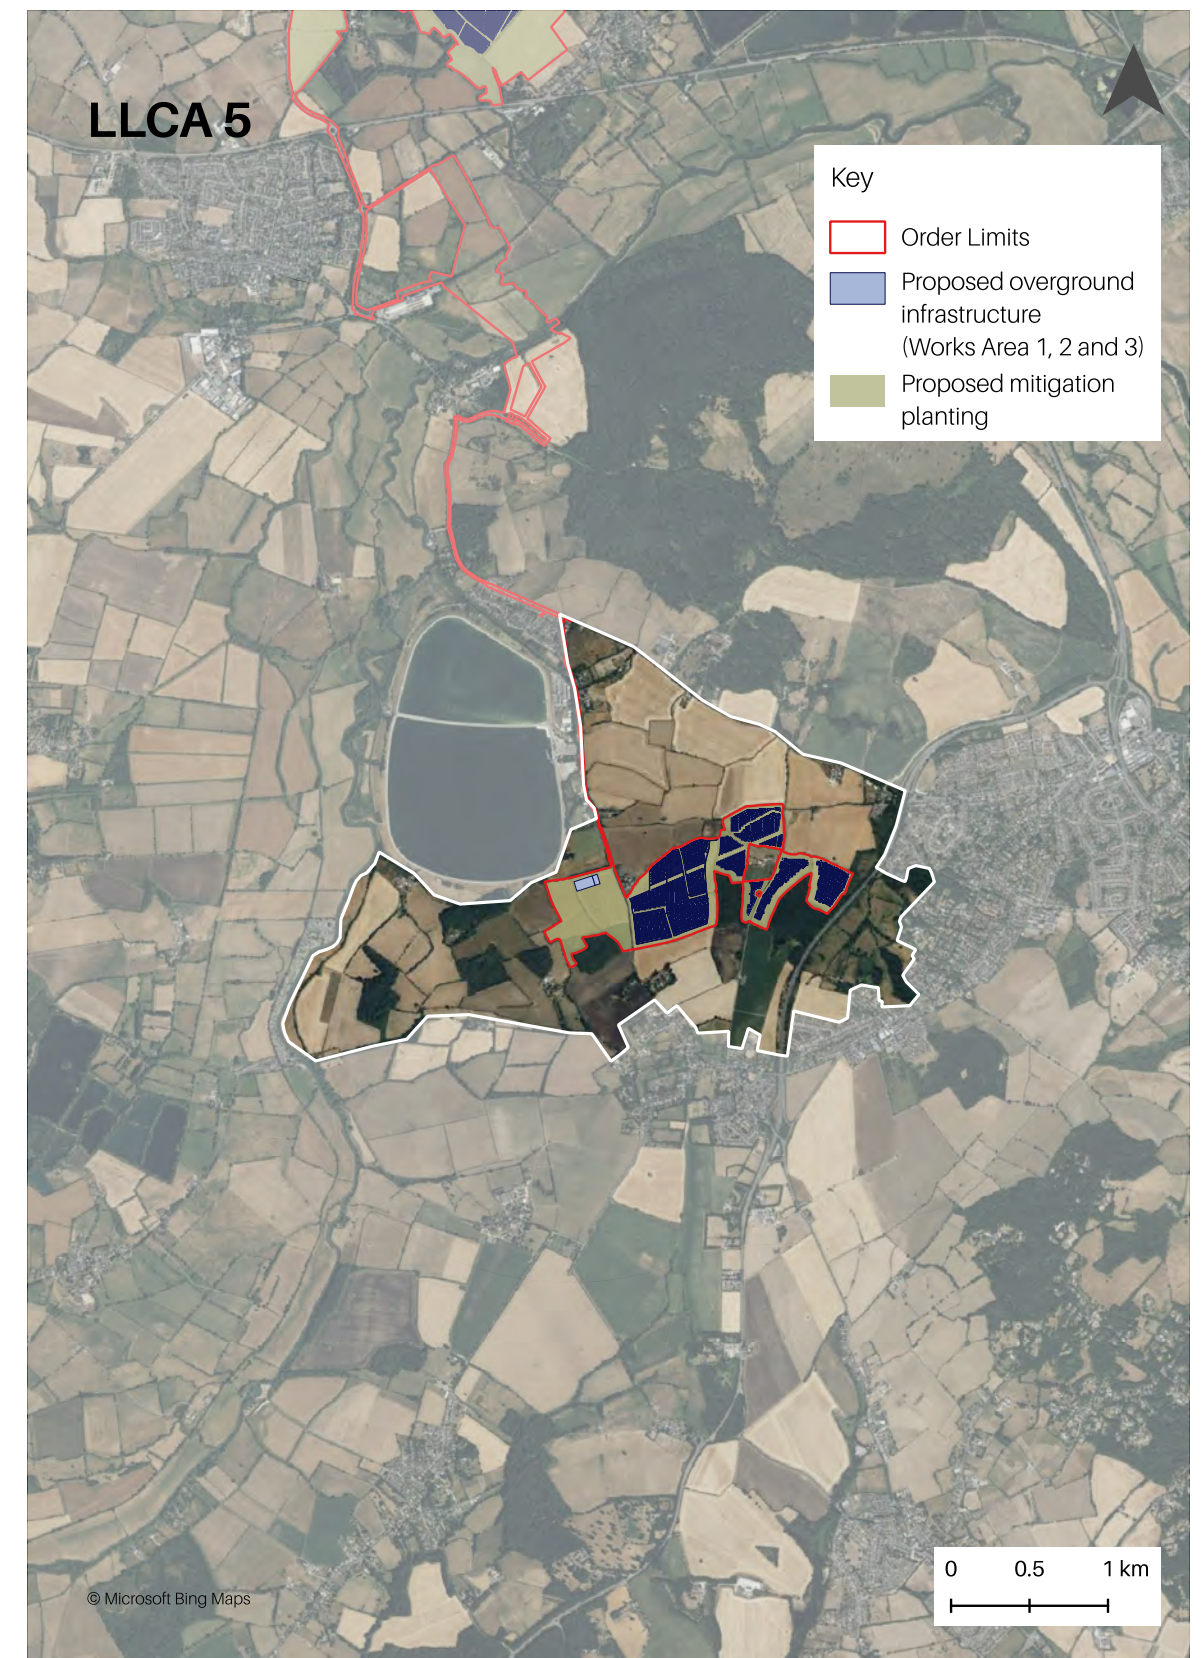


Figure 3.10: Illustrative design response to LLCA 5.

3 | Local Landscape Character & Design Response

BOTLEY WEST SOLAR FARM | EN010147

Nearby Settlements

3.21 Six settlements were identified within a two kilometre search area from the Order Limits, which impart their own individual character and sense of local distinctiveness rooted in their distinctive, historic character, focused around conservation areas and emphasised by the individual properties that have been listed as heritage assets.

3.22 Those in proximity to the Proposed Development are:

- Wootton
- Woodstock
- Bladon
- Cassington
- Church Harnbrough
- Cumnor

Landscape sensitivity

3.23 The sensitivities of these areas focus on the historic qualities and setting.

Key qualities at risk:

- Protect the setting of the settlement.

Design Response:

3.24 Offset the proposed from the nearby settlements to protect their setting.



Section 4


Summary & Conclusions.

4 | Summary & Conclusions

- 4.1 This document has been prepared to provide a more detailed and proportionate understanding of the local landscape character across the proposed Botley West Solar Farm Project and its surroundings. Twenty LLCAs were identified across the search area established as 2km offset from the Order Limits, following the review of the existing studies, desktop research and site visit. Five of the LLCAs fall within Works Area 1, Works Area 2 and Works Areas 3, this is above ground infrastructure, and were reviewed in detail.
- 4.2 The key characteristics, sensitivities and qualities at risk were identified for each LLCA to establish a baseline for the design approach, that responds directly to the local character. The iterative design process applies the mitigation hierarchy principles of avoidance, mitigation and offset. The siting and layout of the proposed development have been carefully considered to avoid the most sensitive landscape features, including river valleys, ridgelines, areas of higher exposure, the settings of heritage assets and settlements.
- 4.3 The proposed development has also been integrated within the prevailing field pattern, thereby maintaining the underlying landscape structure and reducing the extent of potential vegetation loss. Key elements, including hedgerows, mature trees, woodland blocks and historic field boundaries, are proposed to be retained and enhanced. The proposed planting includes hedgerows, trees and belts of trees to reinforce the local landscape pattern.

Section 5

Landscape Parameter Plan.

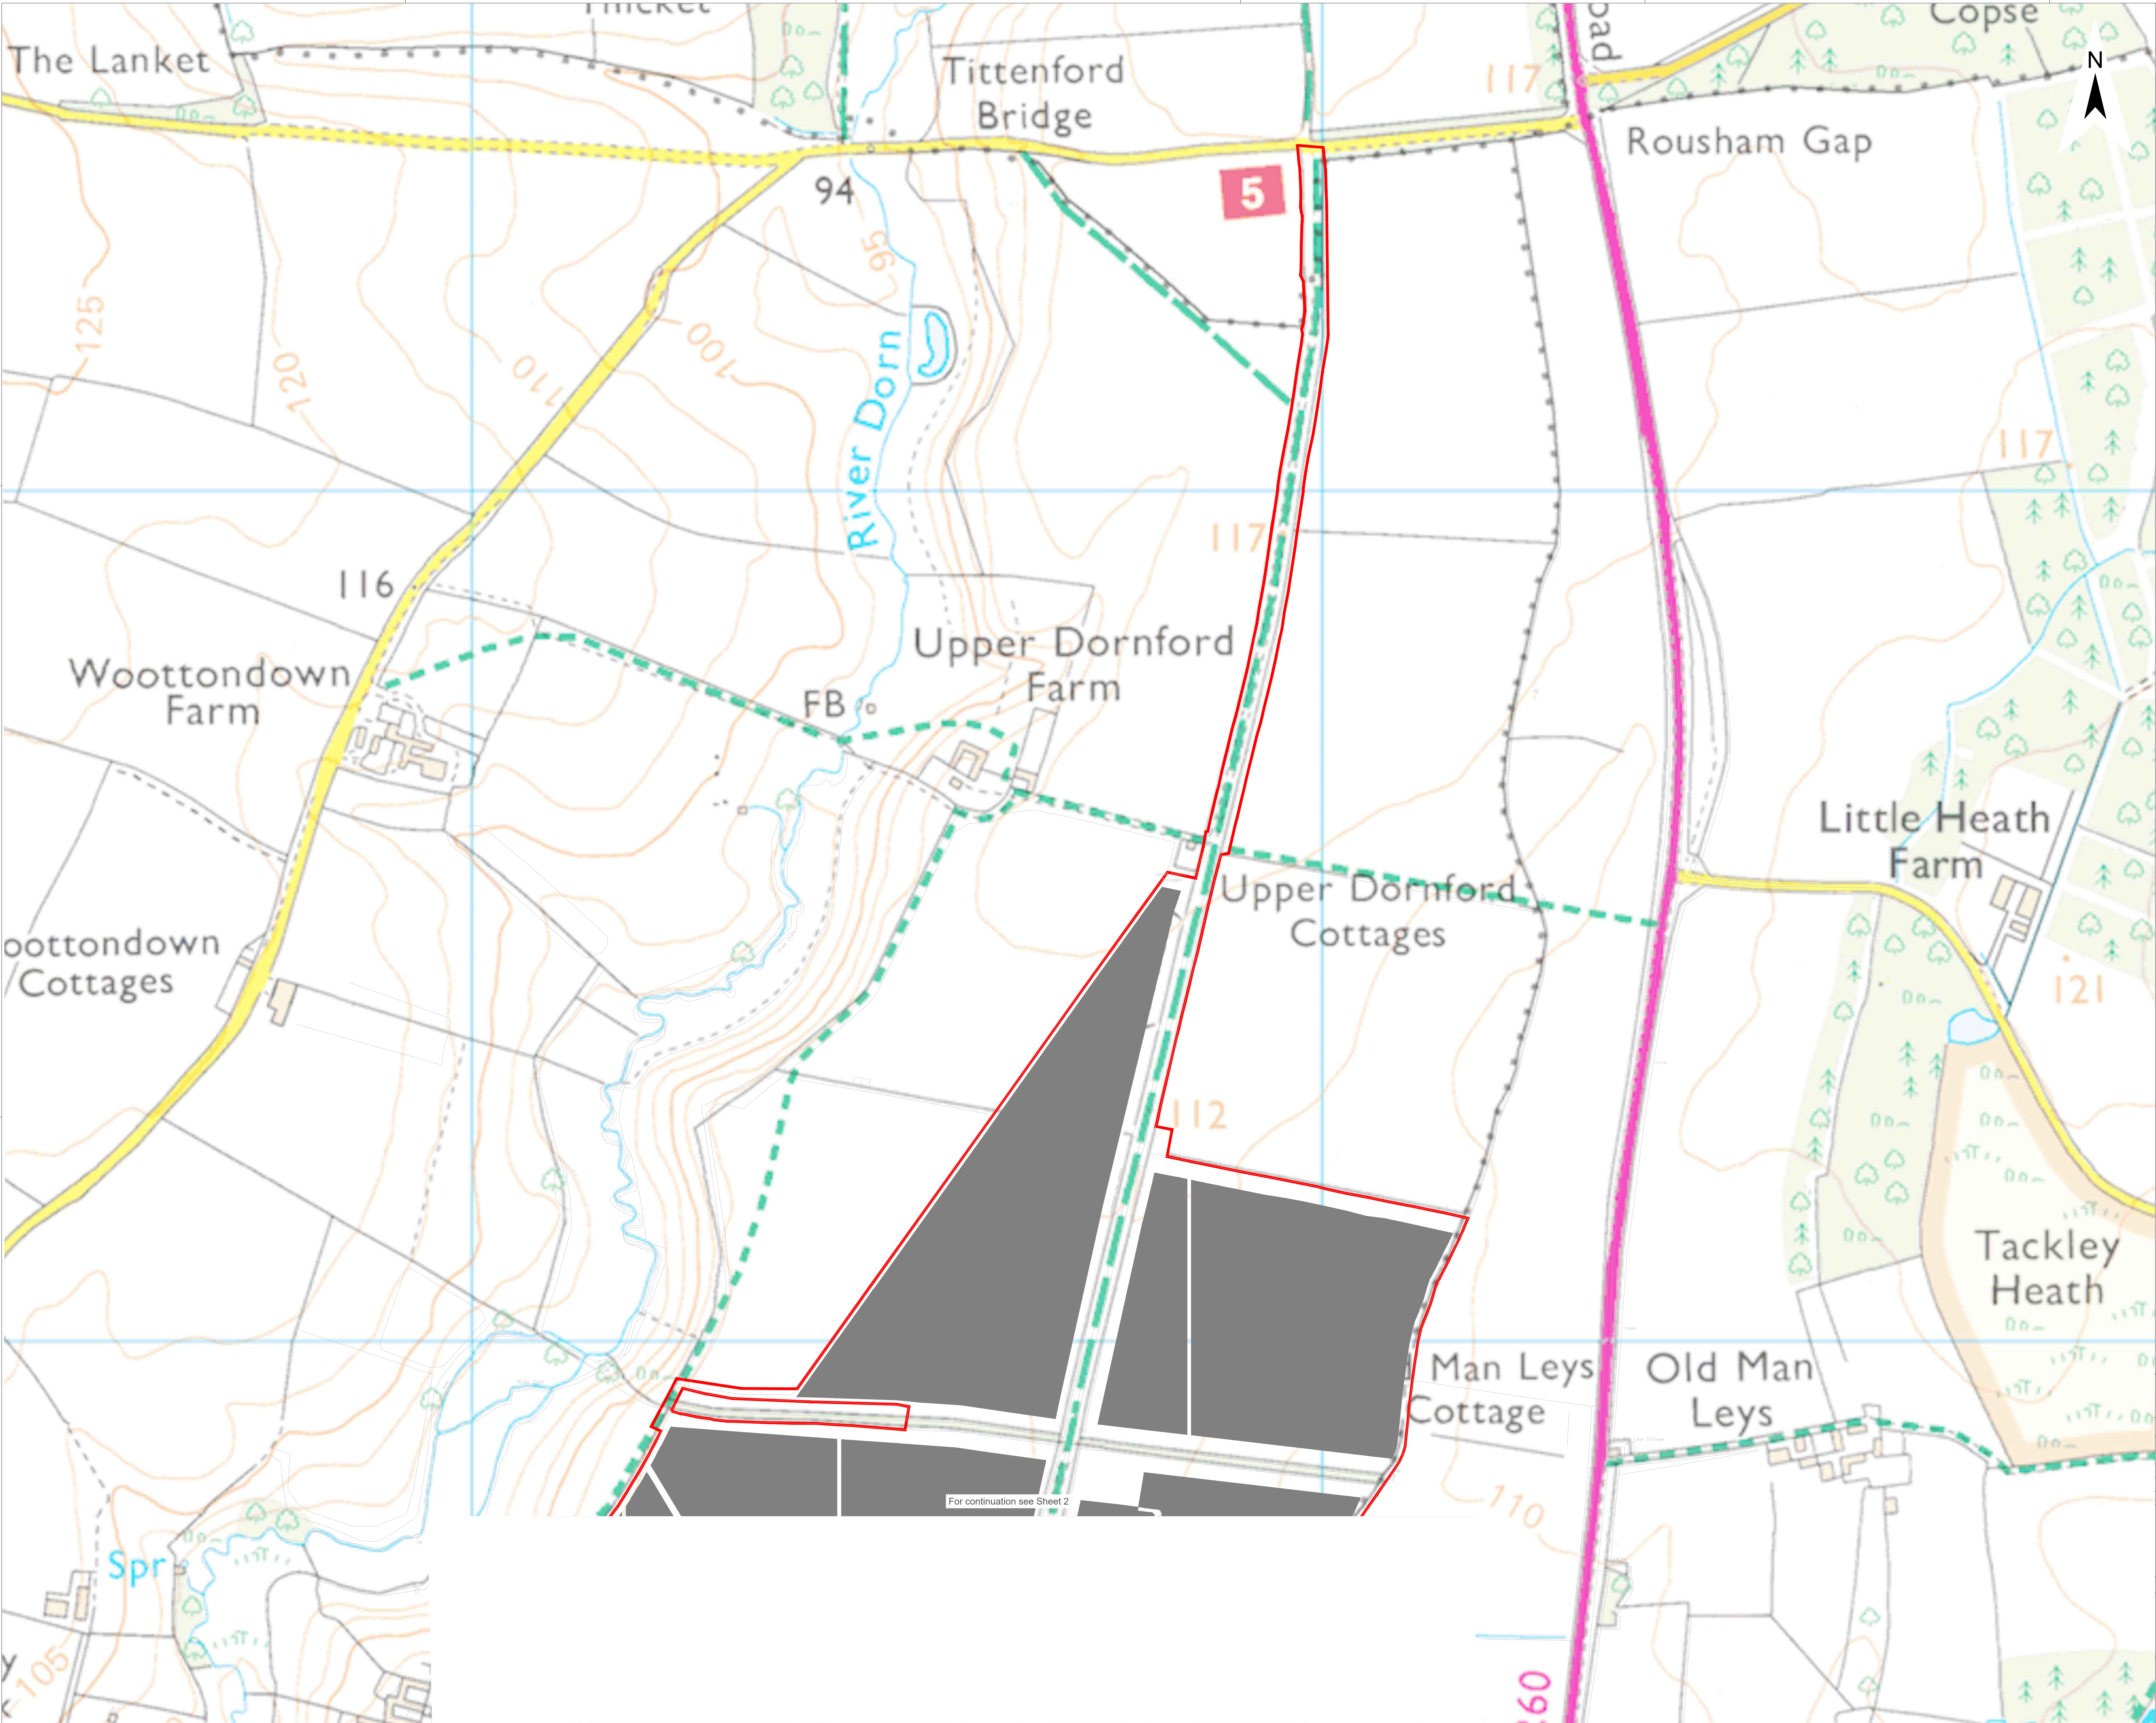

Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Project			Status		
Botley West Solar Farm			Final		
Id.	Changes	Date	Name		
				Date	Name
				Edit	16.07.2026 M.Thom
				Check	16.07.2026 H.Trabelsi
			Drawing No. EN010147/APP/21.6		
A	Created	16.07.2026	M.Thom		

0 100 200 Meters

Scale: 1:2500 at A0

Title

Landscape Parameter Plan
Sheet 1
Northern Site Area 1 of 3

Photovoltaik
Development Partners

Photovoltaik Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany



Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Extent of Works No. 3(b) under Requirement 15

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No		
A	Created	16.07.2026	M.Thom	EN010147/APP/21.6		




Scale: 1:2500 at A0

Title

Landscape Parameter Plan

Sheet 2

Northern Site Area 2 of 3

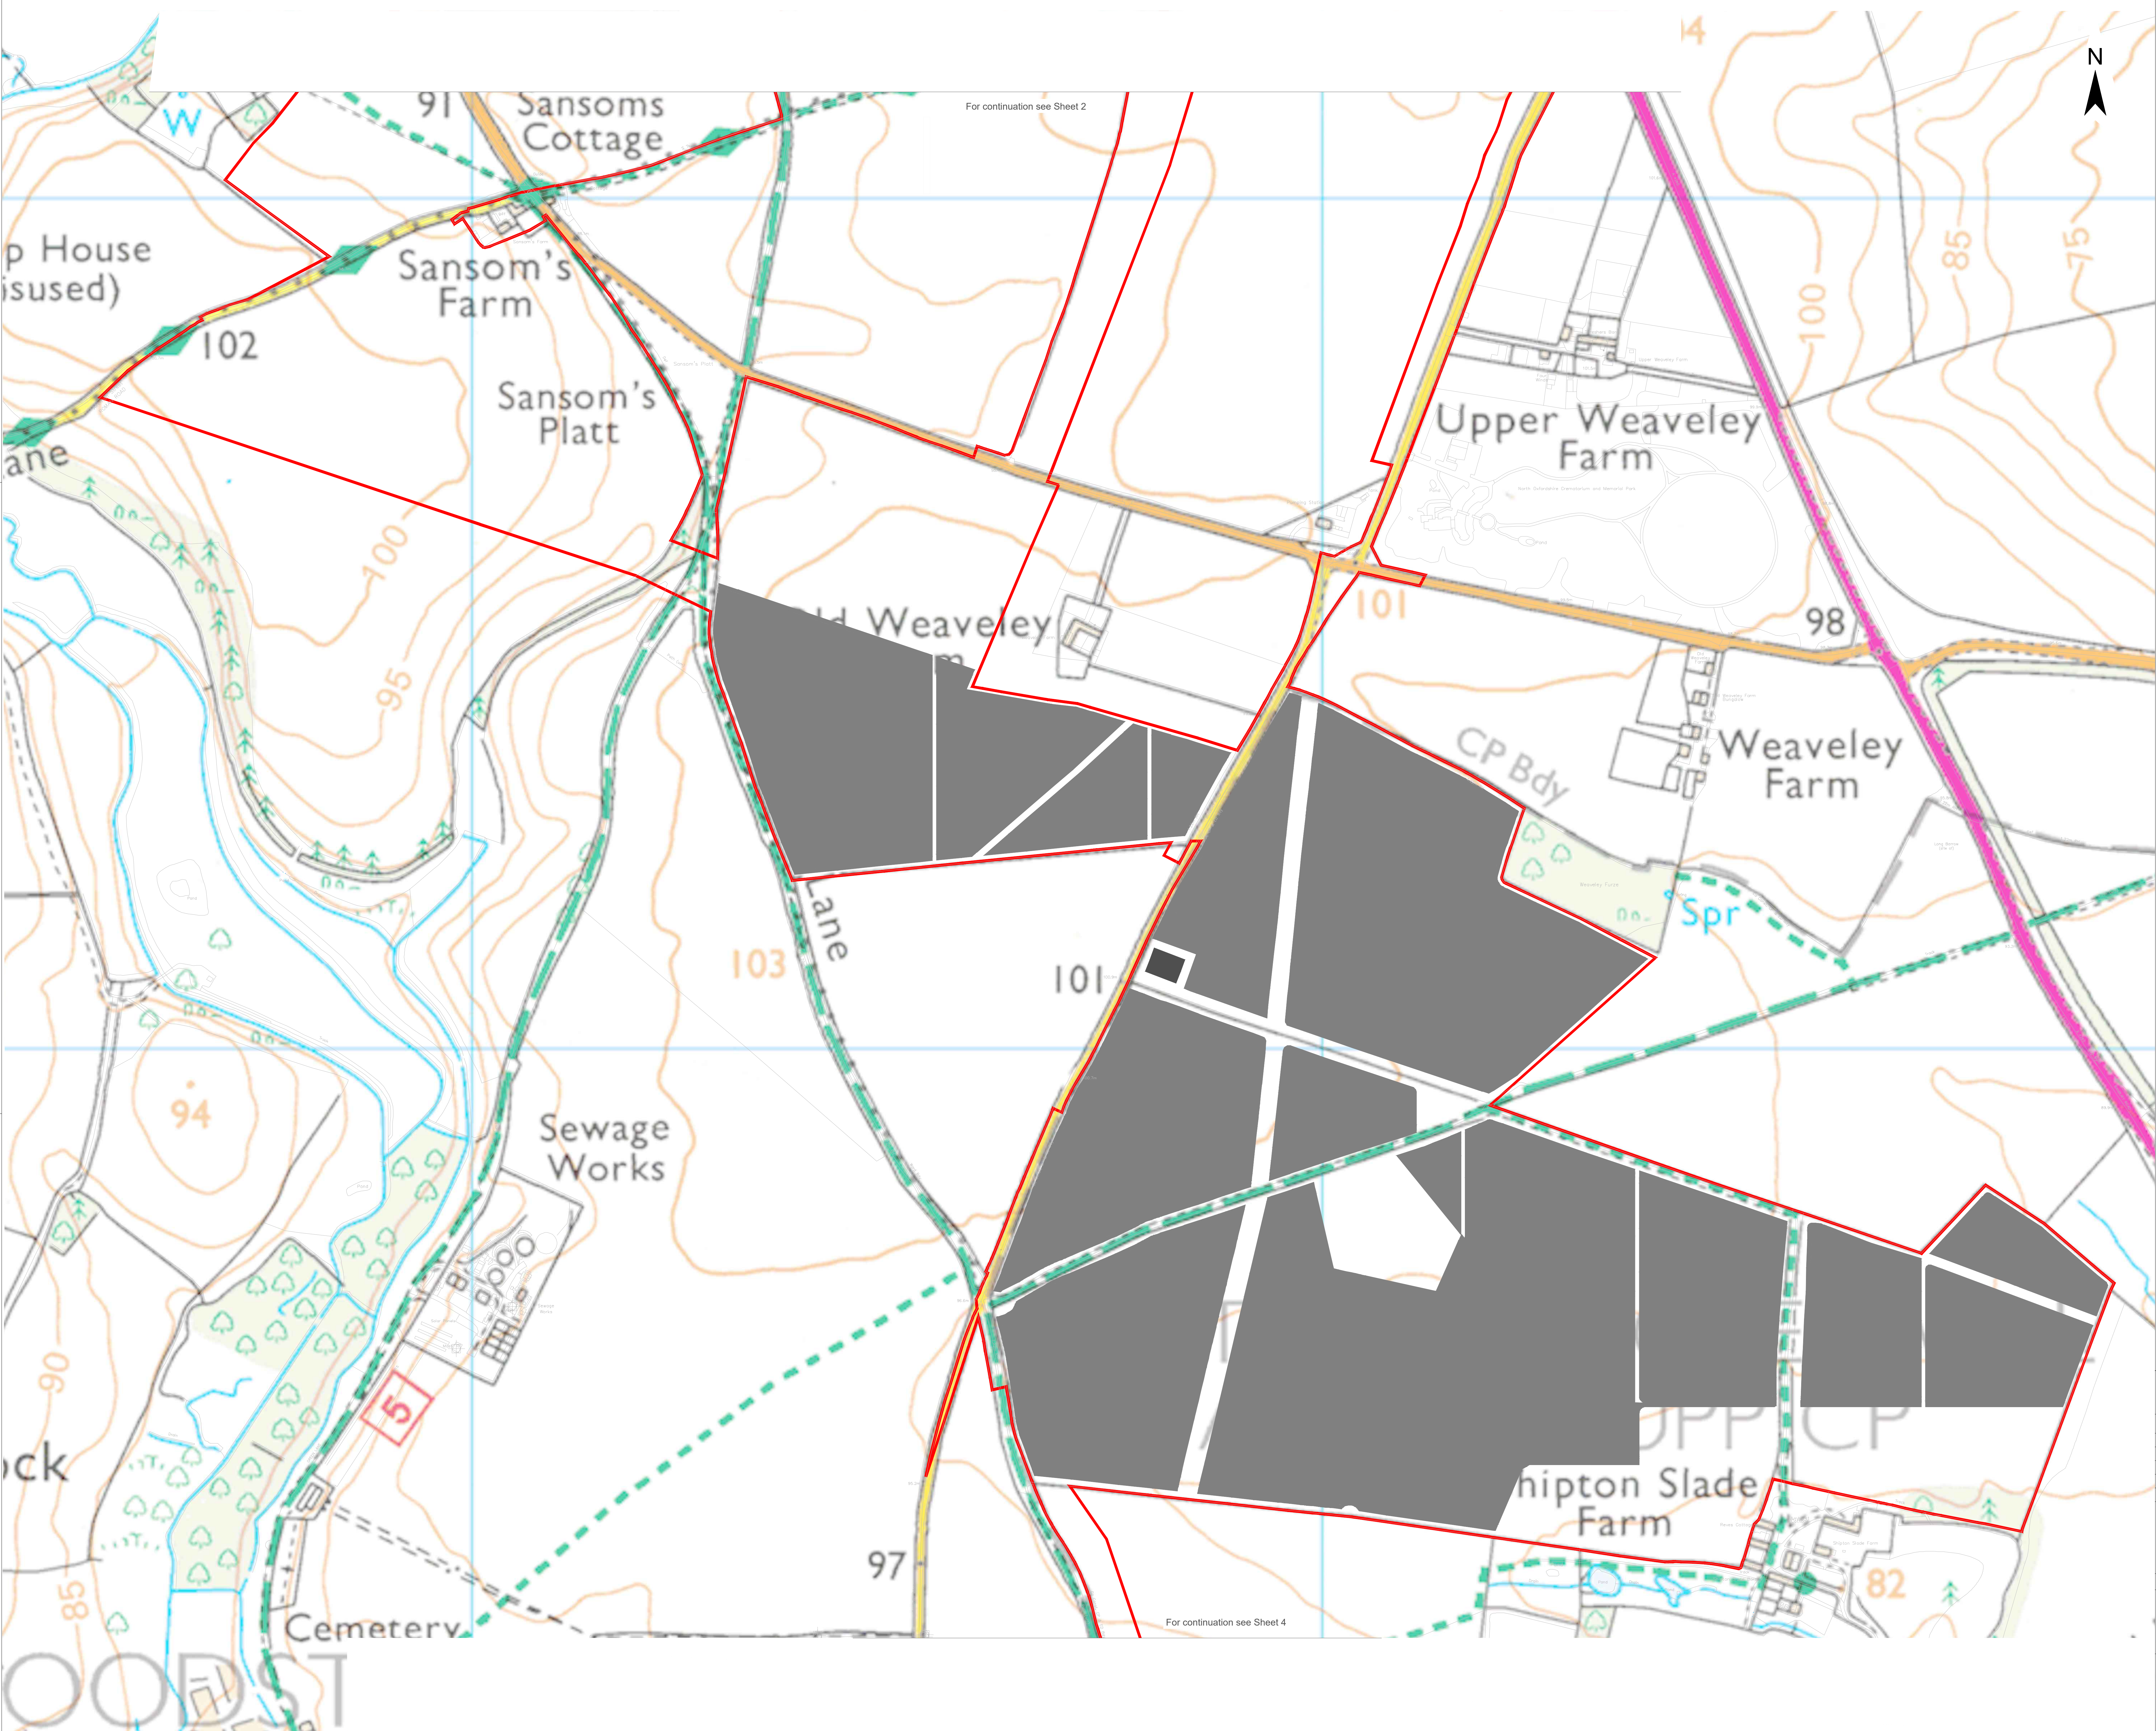

For continuation see Sheet 2

For continuation see Sheet 4


Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Extent of Works No. 3(b) under Requirement 15

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom			




Scale: 1:2500 at A0

Title
Landscape Parameter Plan
Sheet 3
Northern Site Area 3 of 3



Photovoltaik Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

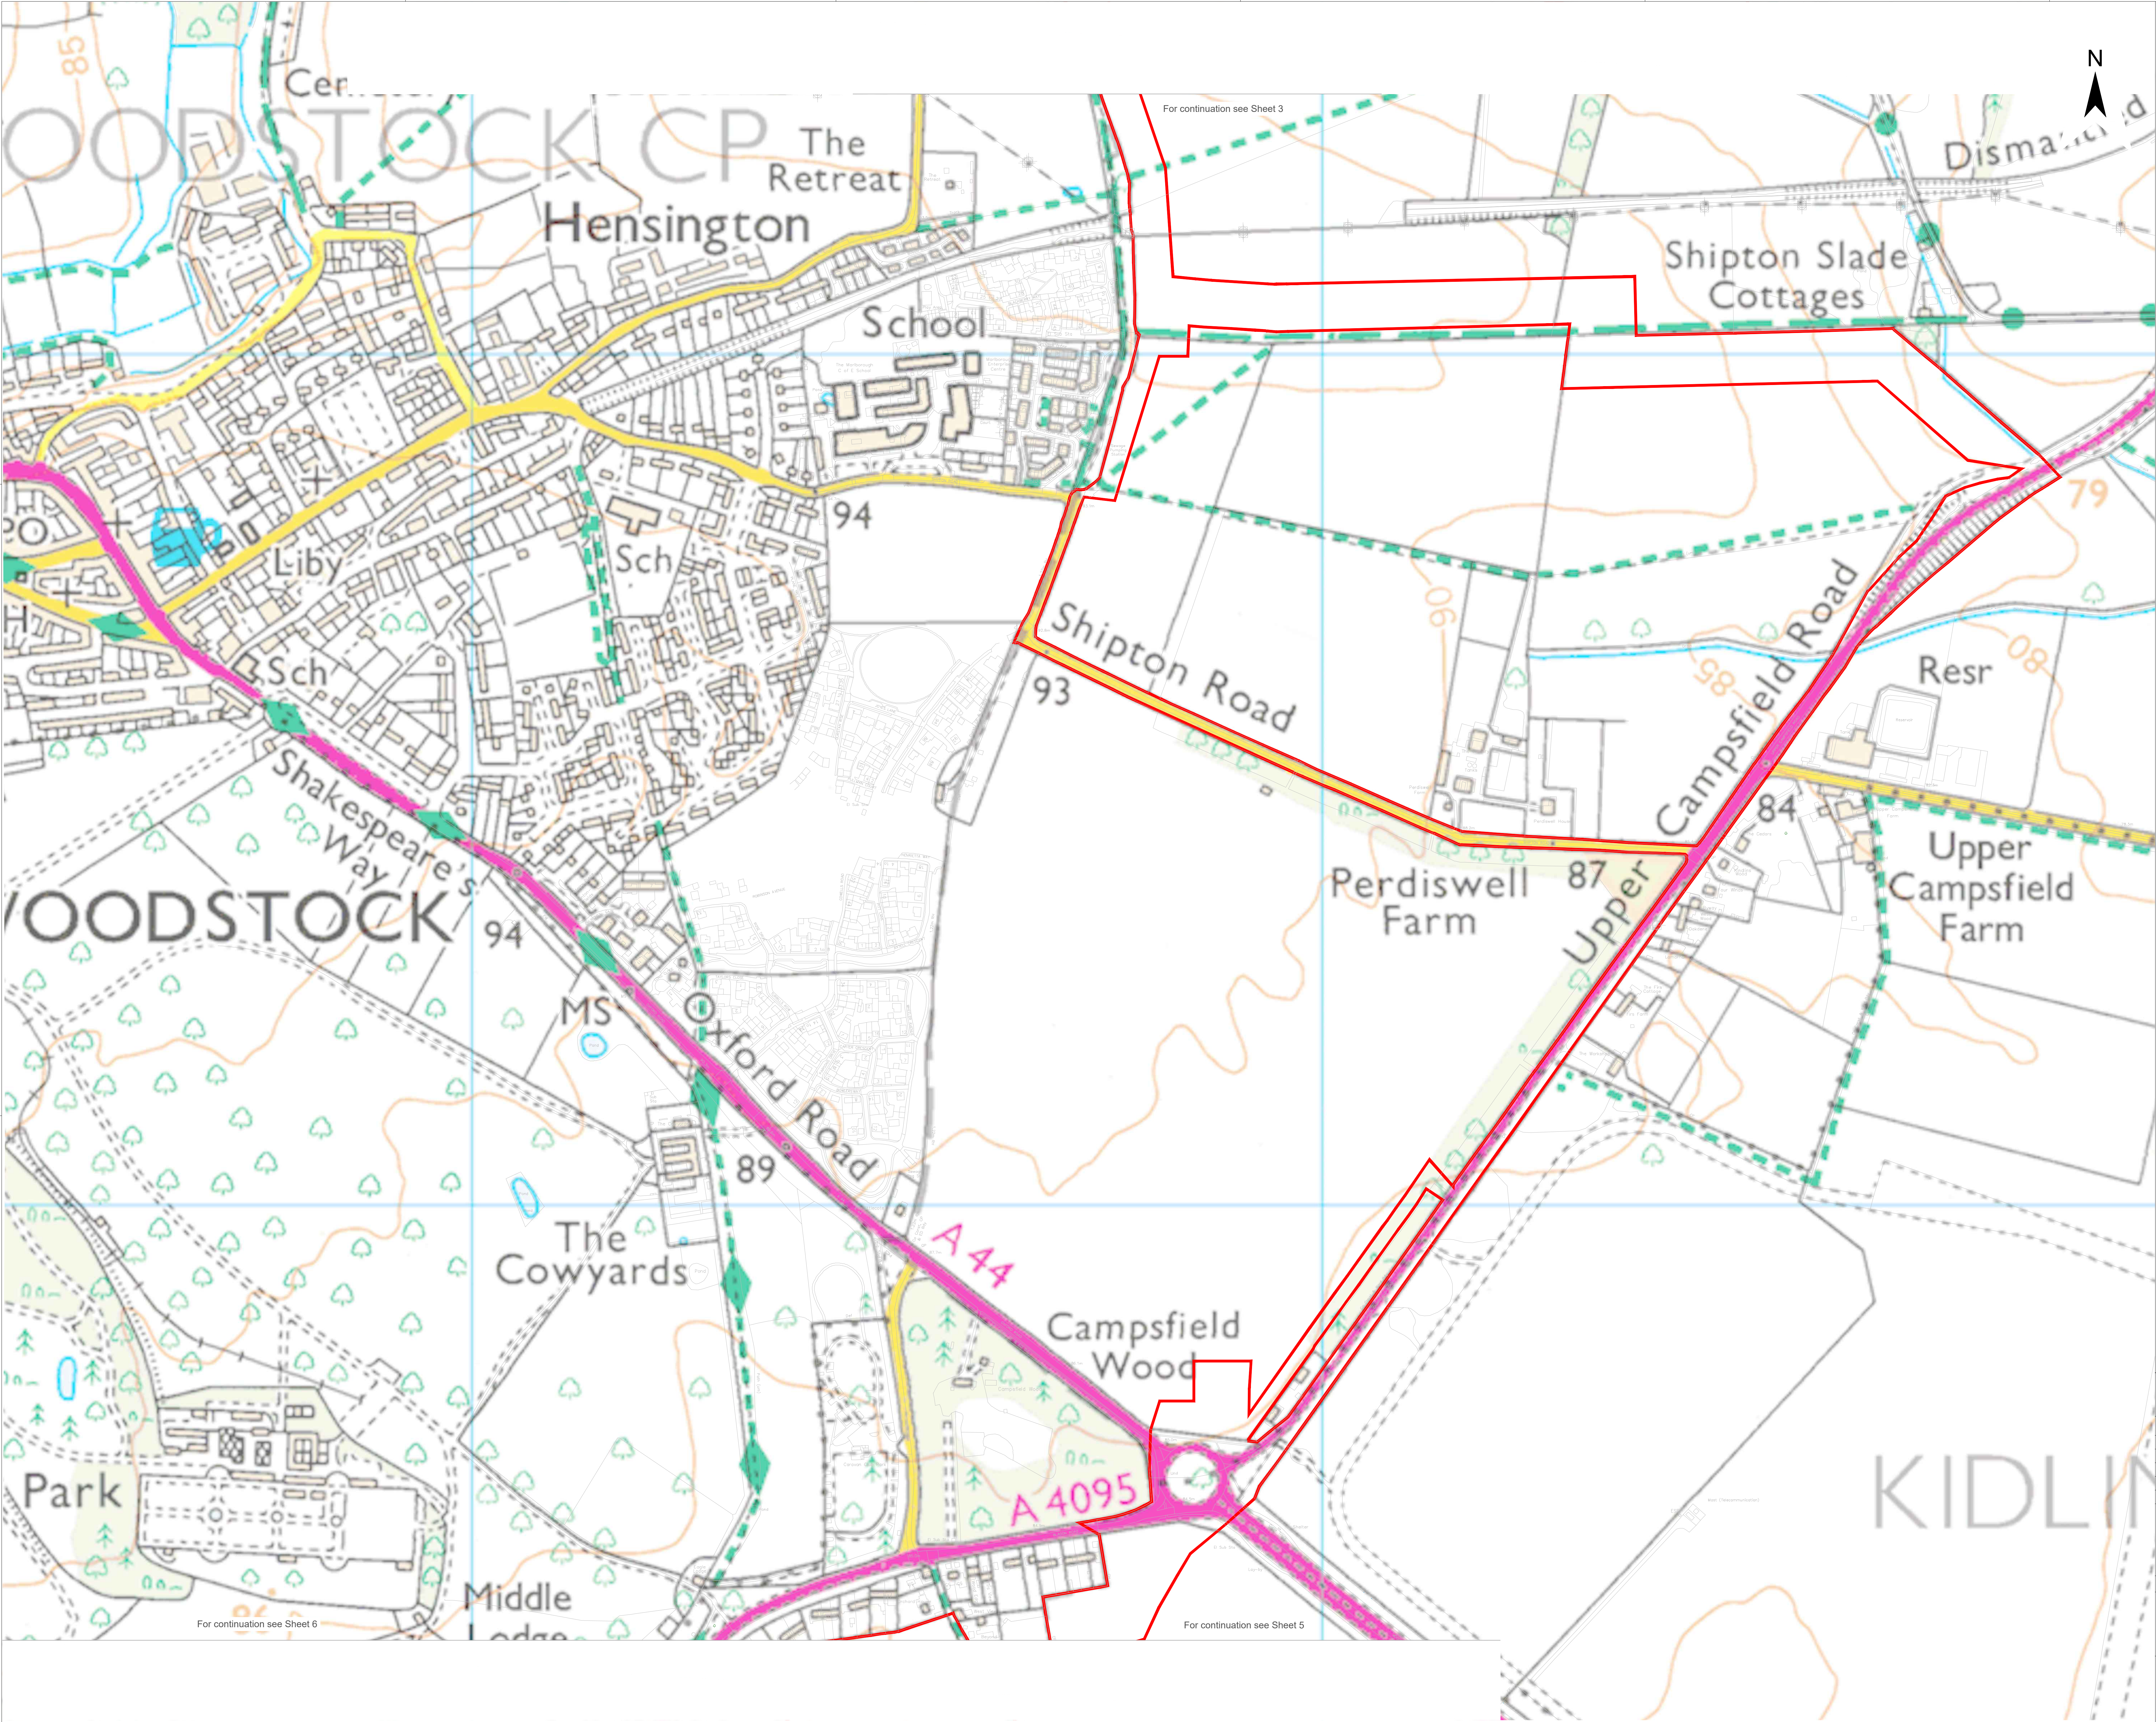

Legend

Site Location and Order Limits

Project			Status		
Botley West Solar Farm			Final		
Id.	Changes	Date	Name	Date	Name
			Edit	16.07.2026	M.Thom
			Check	16.07.2026	H.Trabelsi
			Drawing No	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom		

0100200

Meters

Scale: 1:2500 at A0


Title

Landscape Parameter Plan

Sheet 4

275kV Illustrative Cable Corridor Plan

Photovoltaik-Entwicklungs-Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

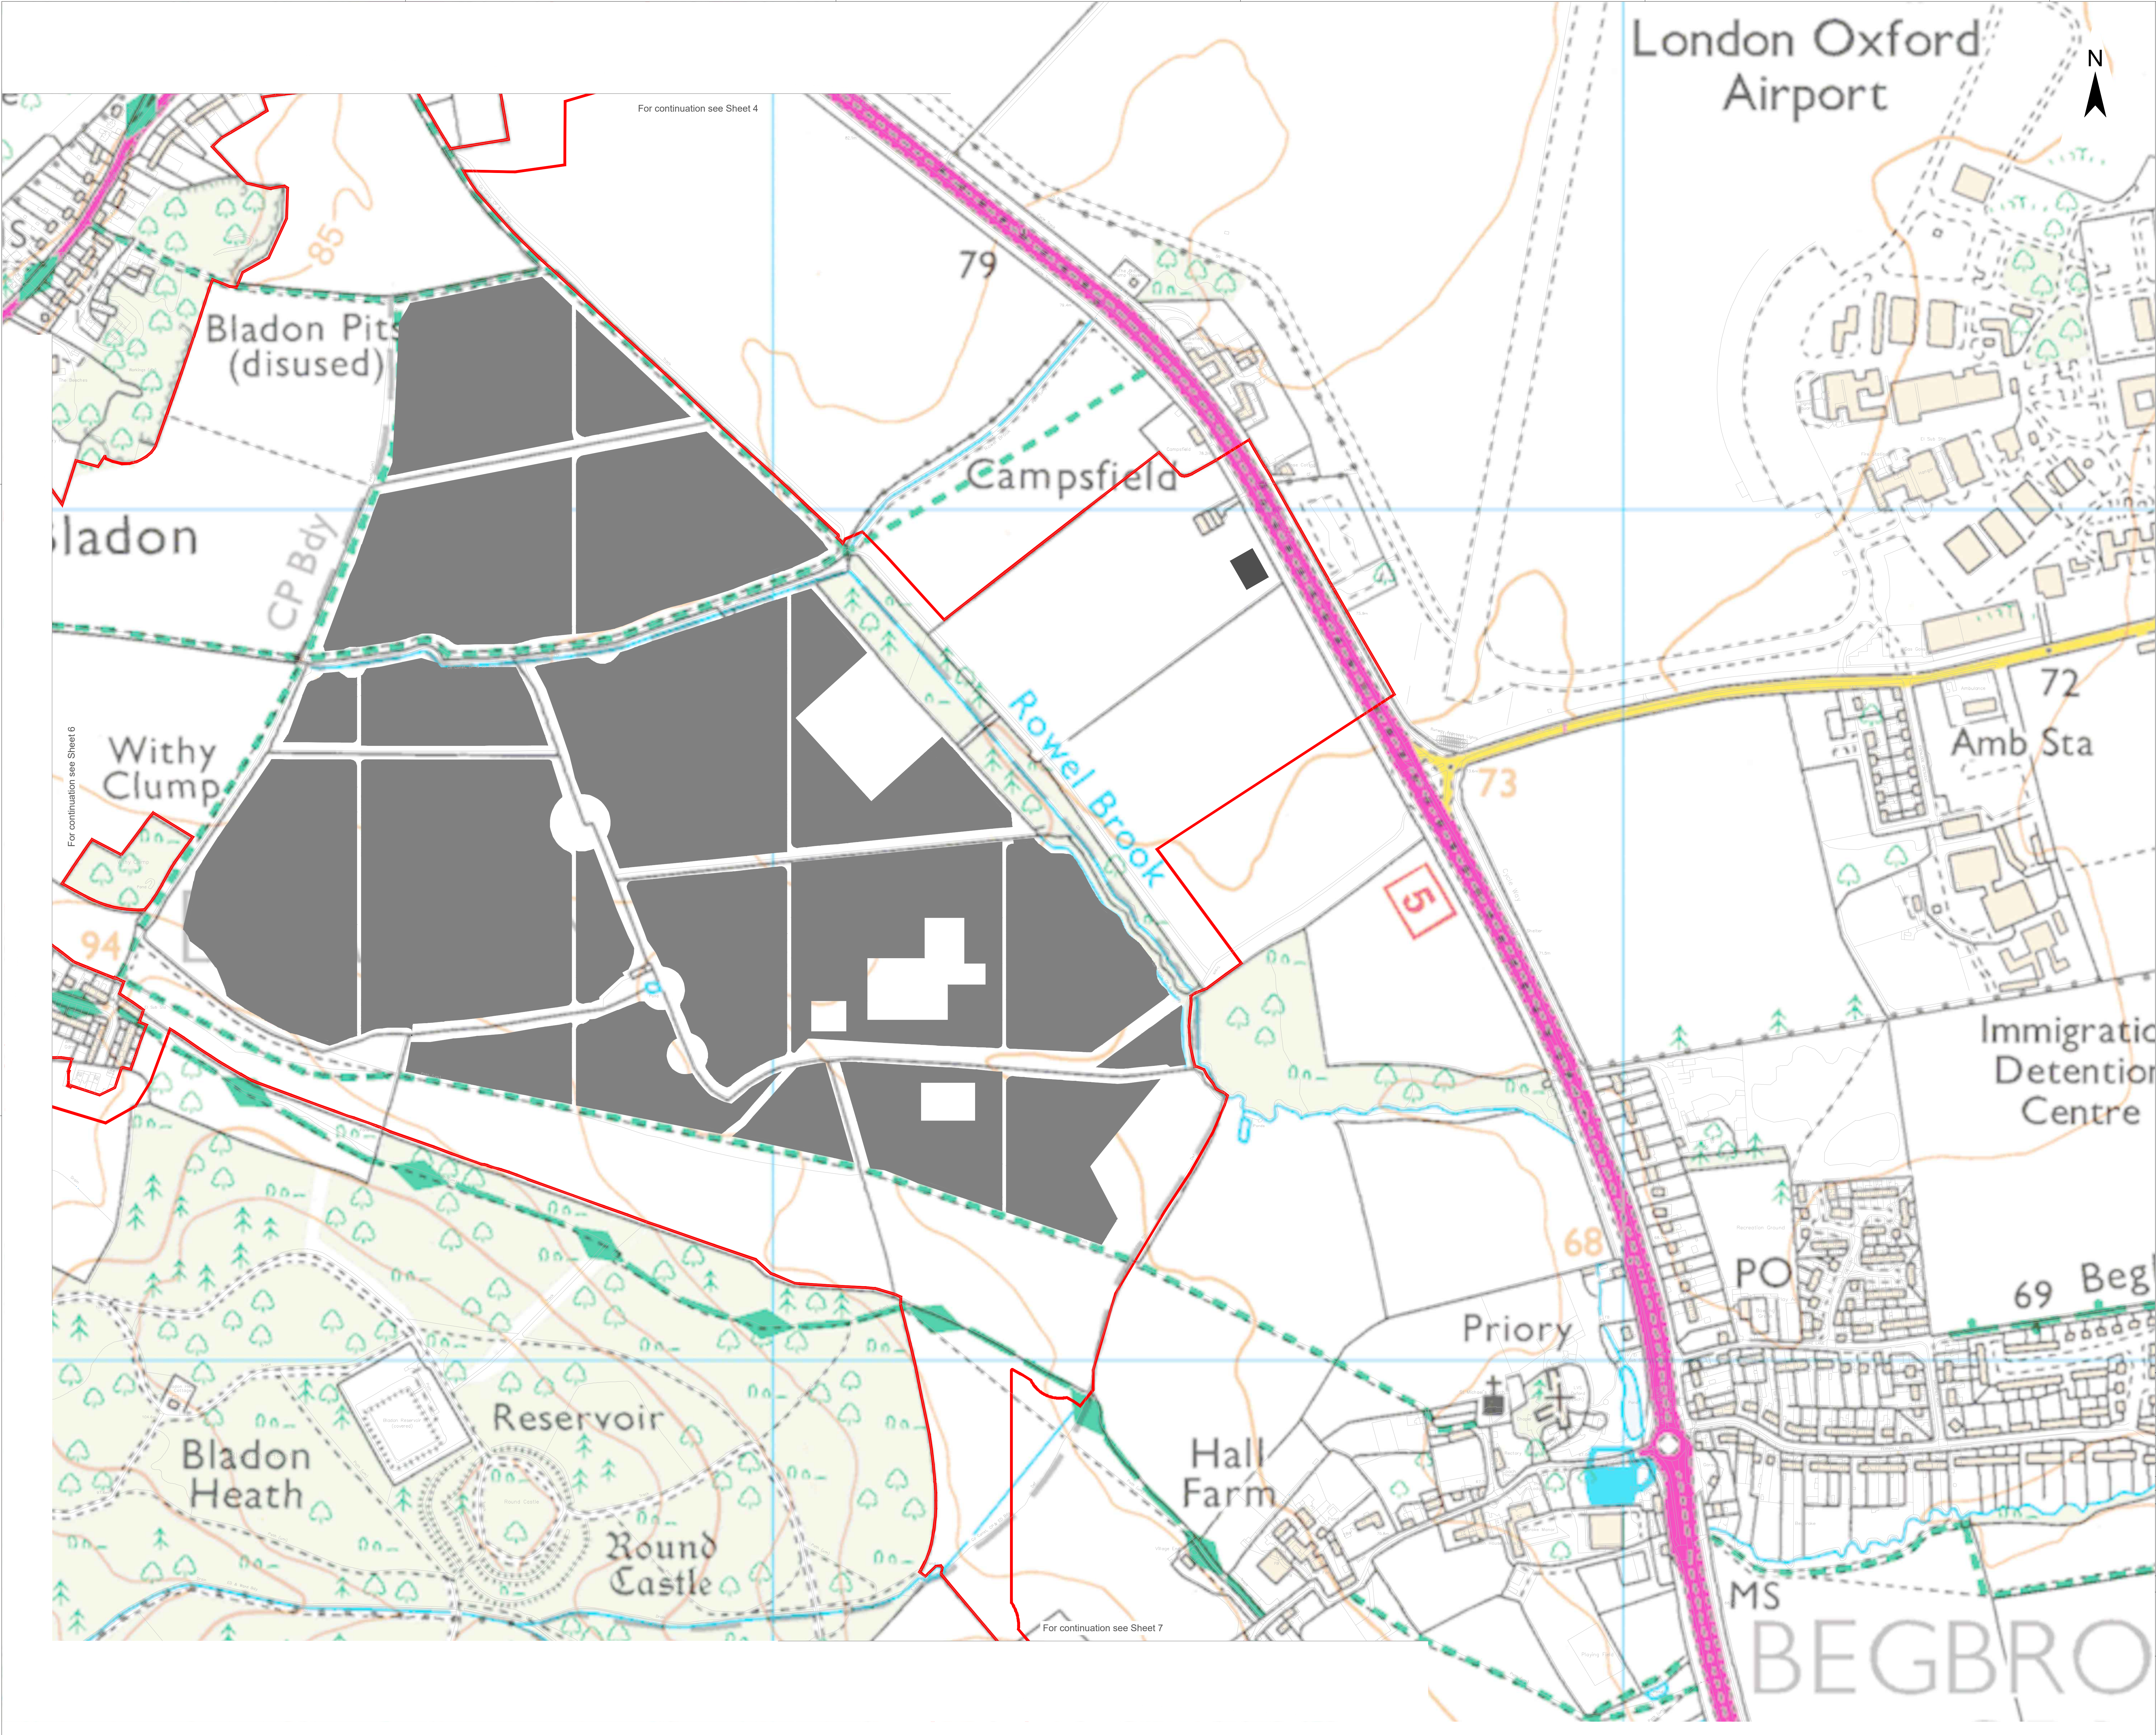

For continuation see Sheet 4

For continuation see Sheet 7

For continuation see Sheet 6


Legend

Site Location and Order Limits 

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15 

Extent of Works No. 3(b) under Requirement 15 

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom			




Scale: 1:2500 at A0

Title: Landscape Parameter Plan
Sheet 5
Central Site Area 1 of 6



Photovoltaik Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

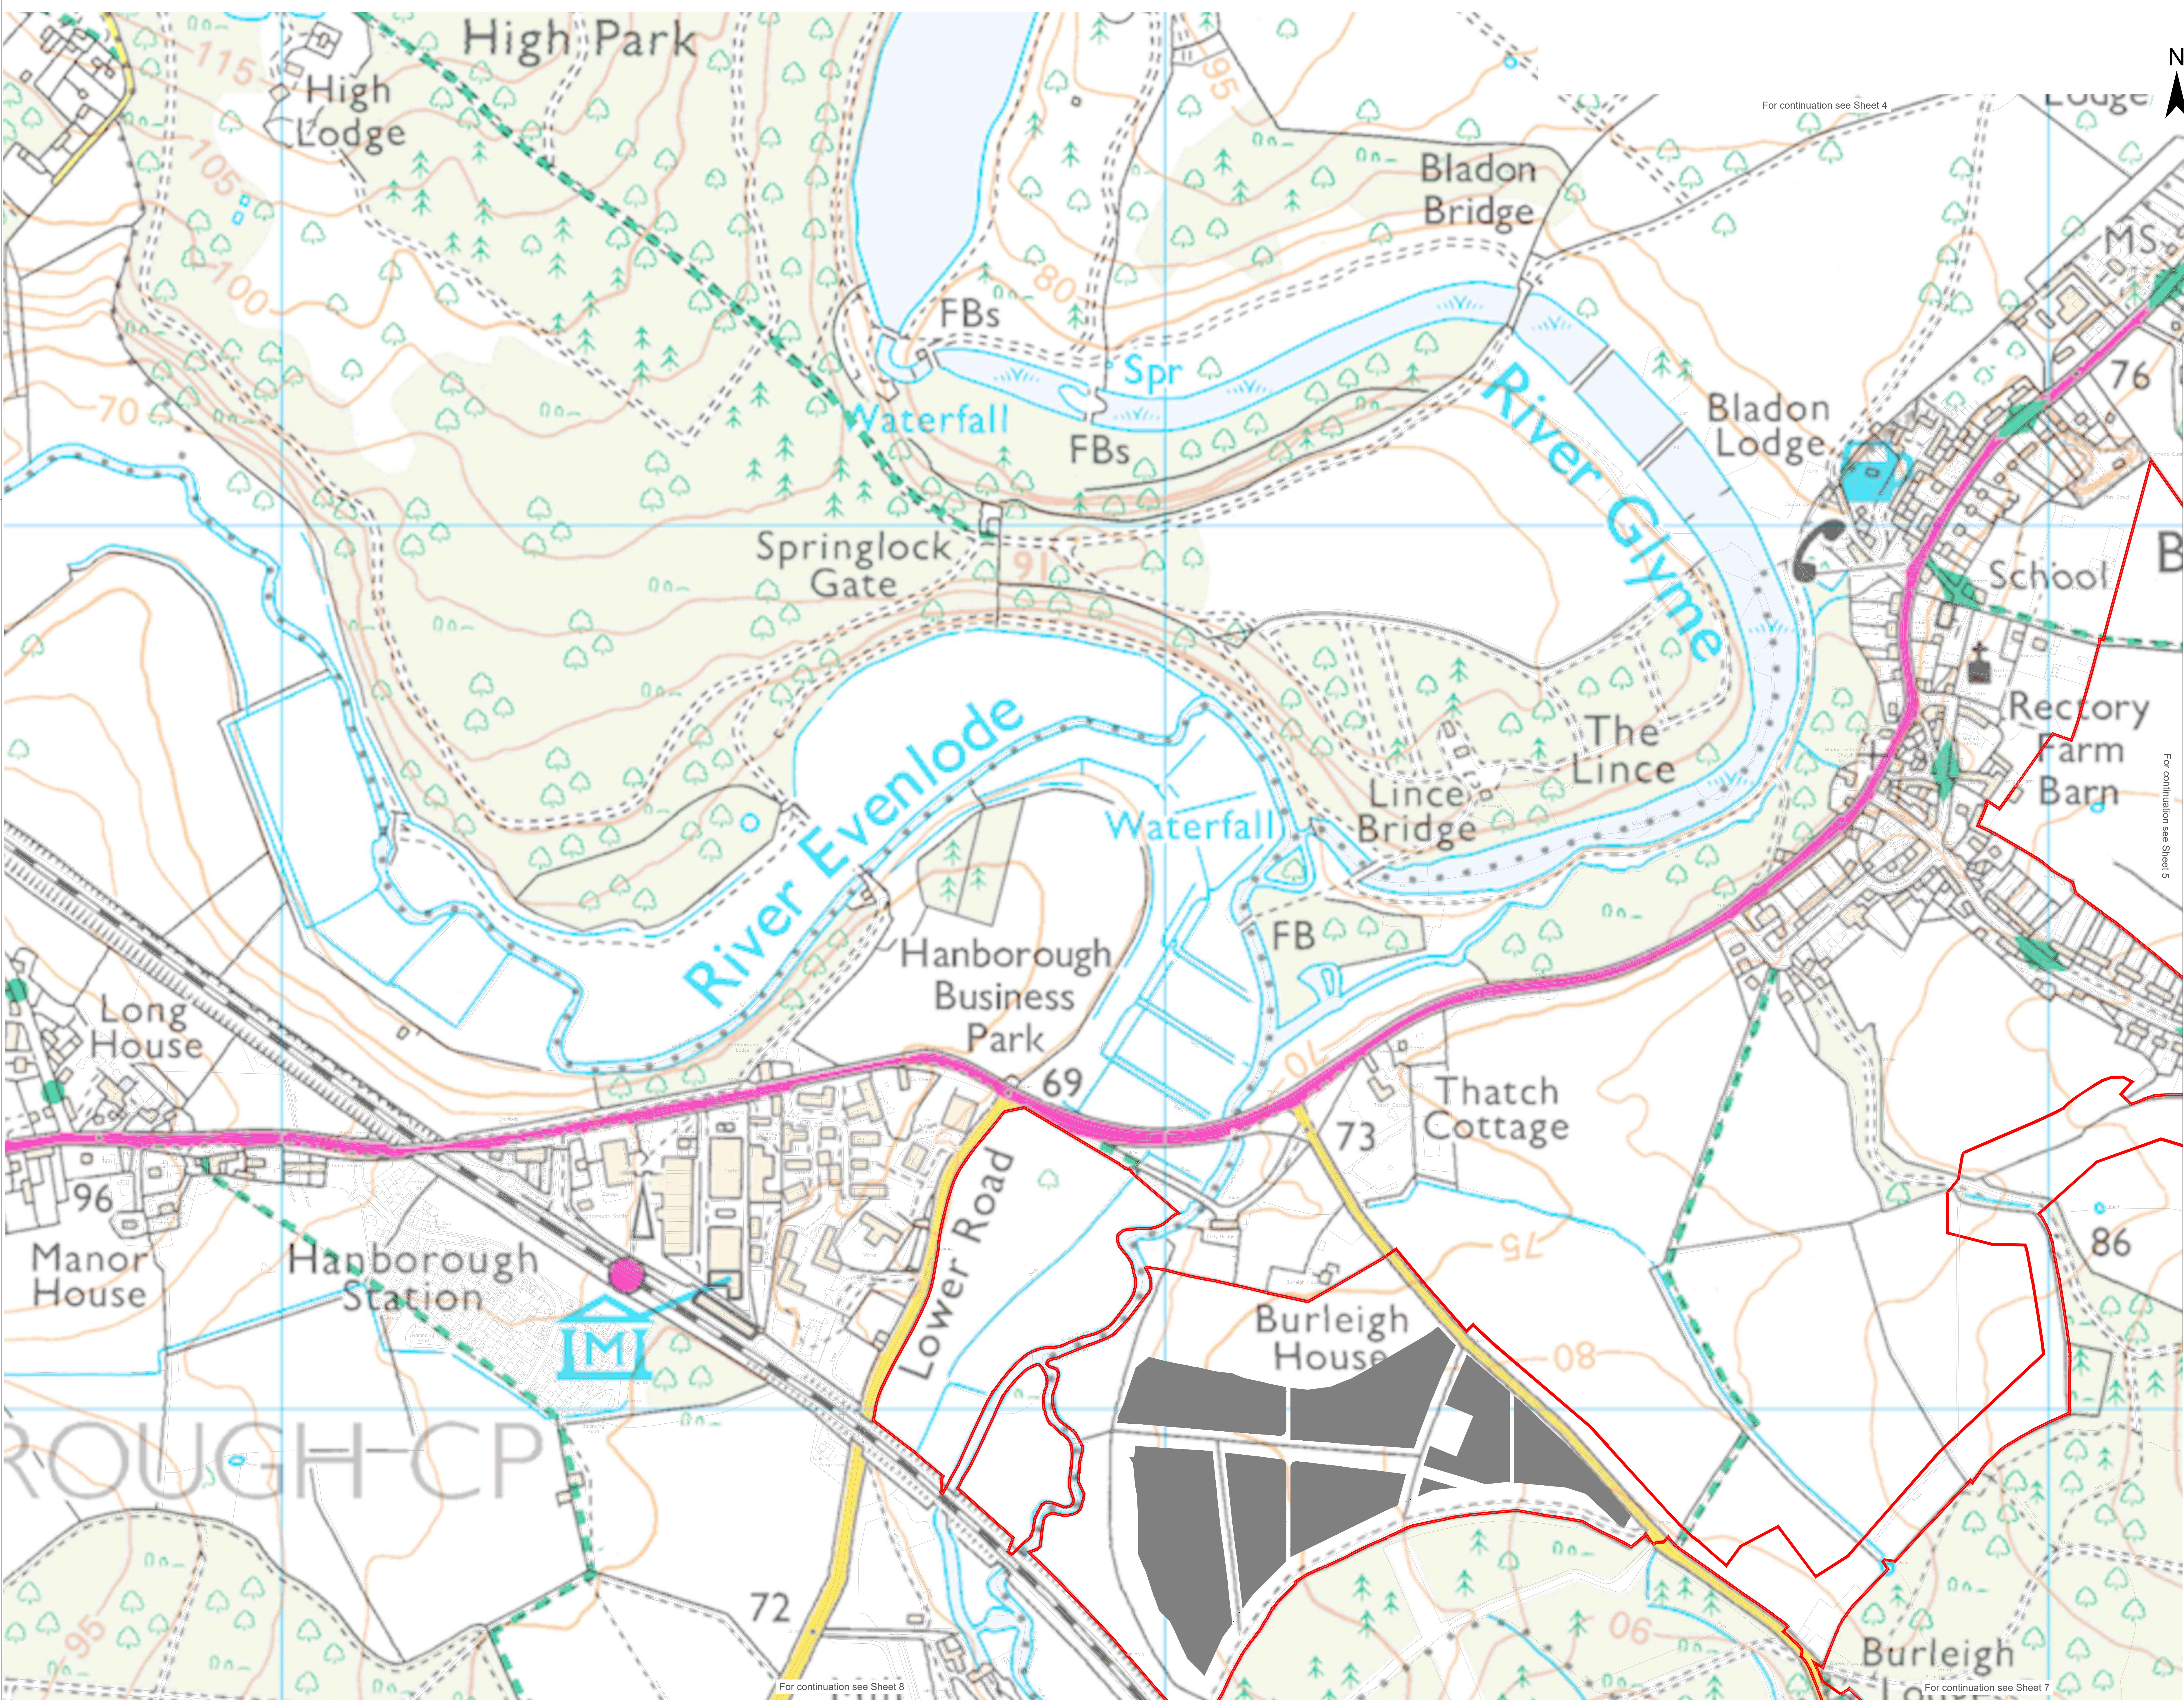

Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Project

Botley West Solar Farm

Status

Final

Id.	Changes	Date	Name		Date	Name
			Edit	16.07.2026	M.Thom	
			Check	16.07.2026	H.Trabelsi	
			Drawing No	EN010147/APP/21.6		
A	Created	16.07.2026	M.Thom			

Scale: 1:2500 at A0


Title

Landscape Parameter Plan

Sheet 6

Central Site Area 2 of 6

Photovoltaic Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

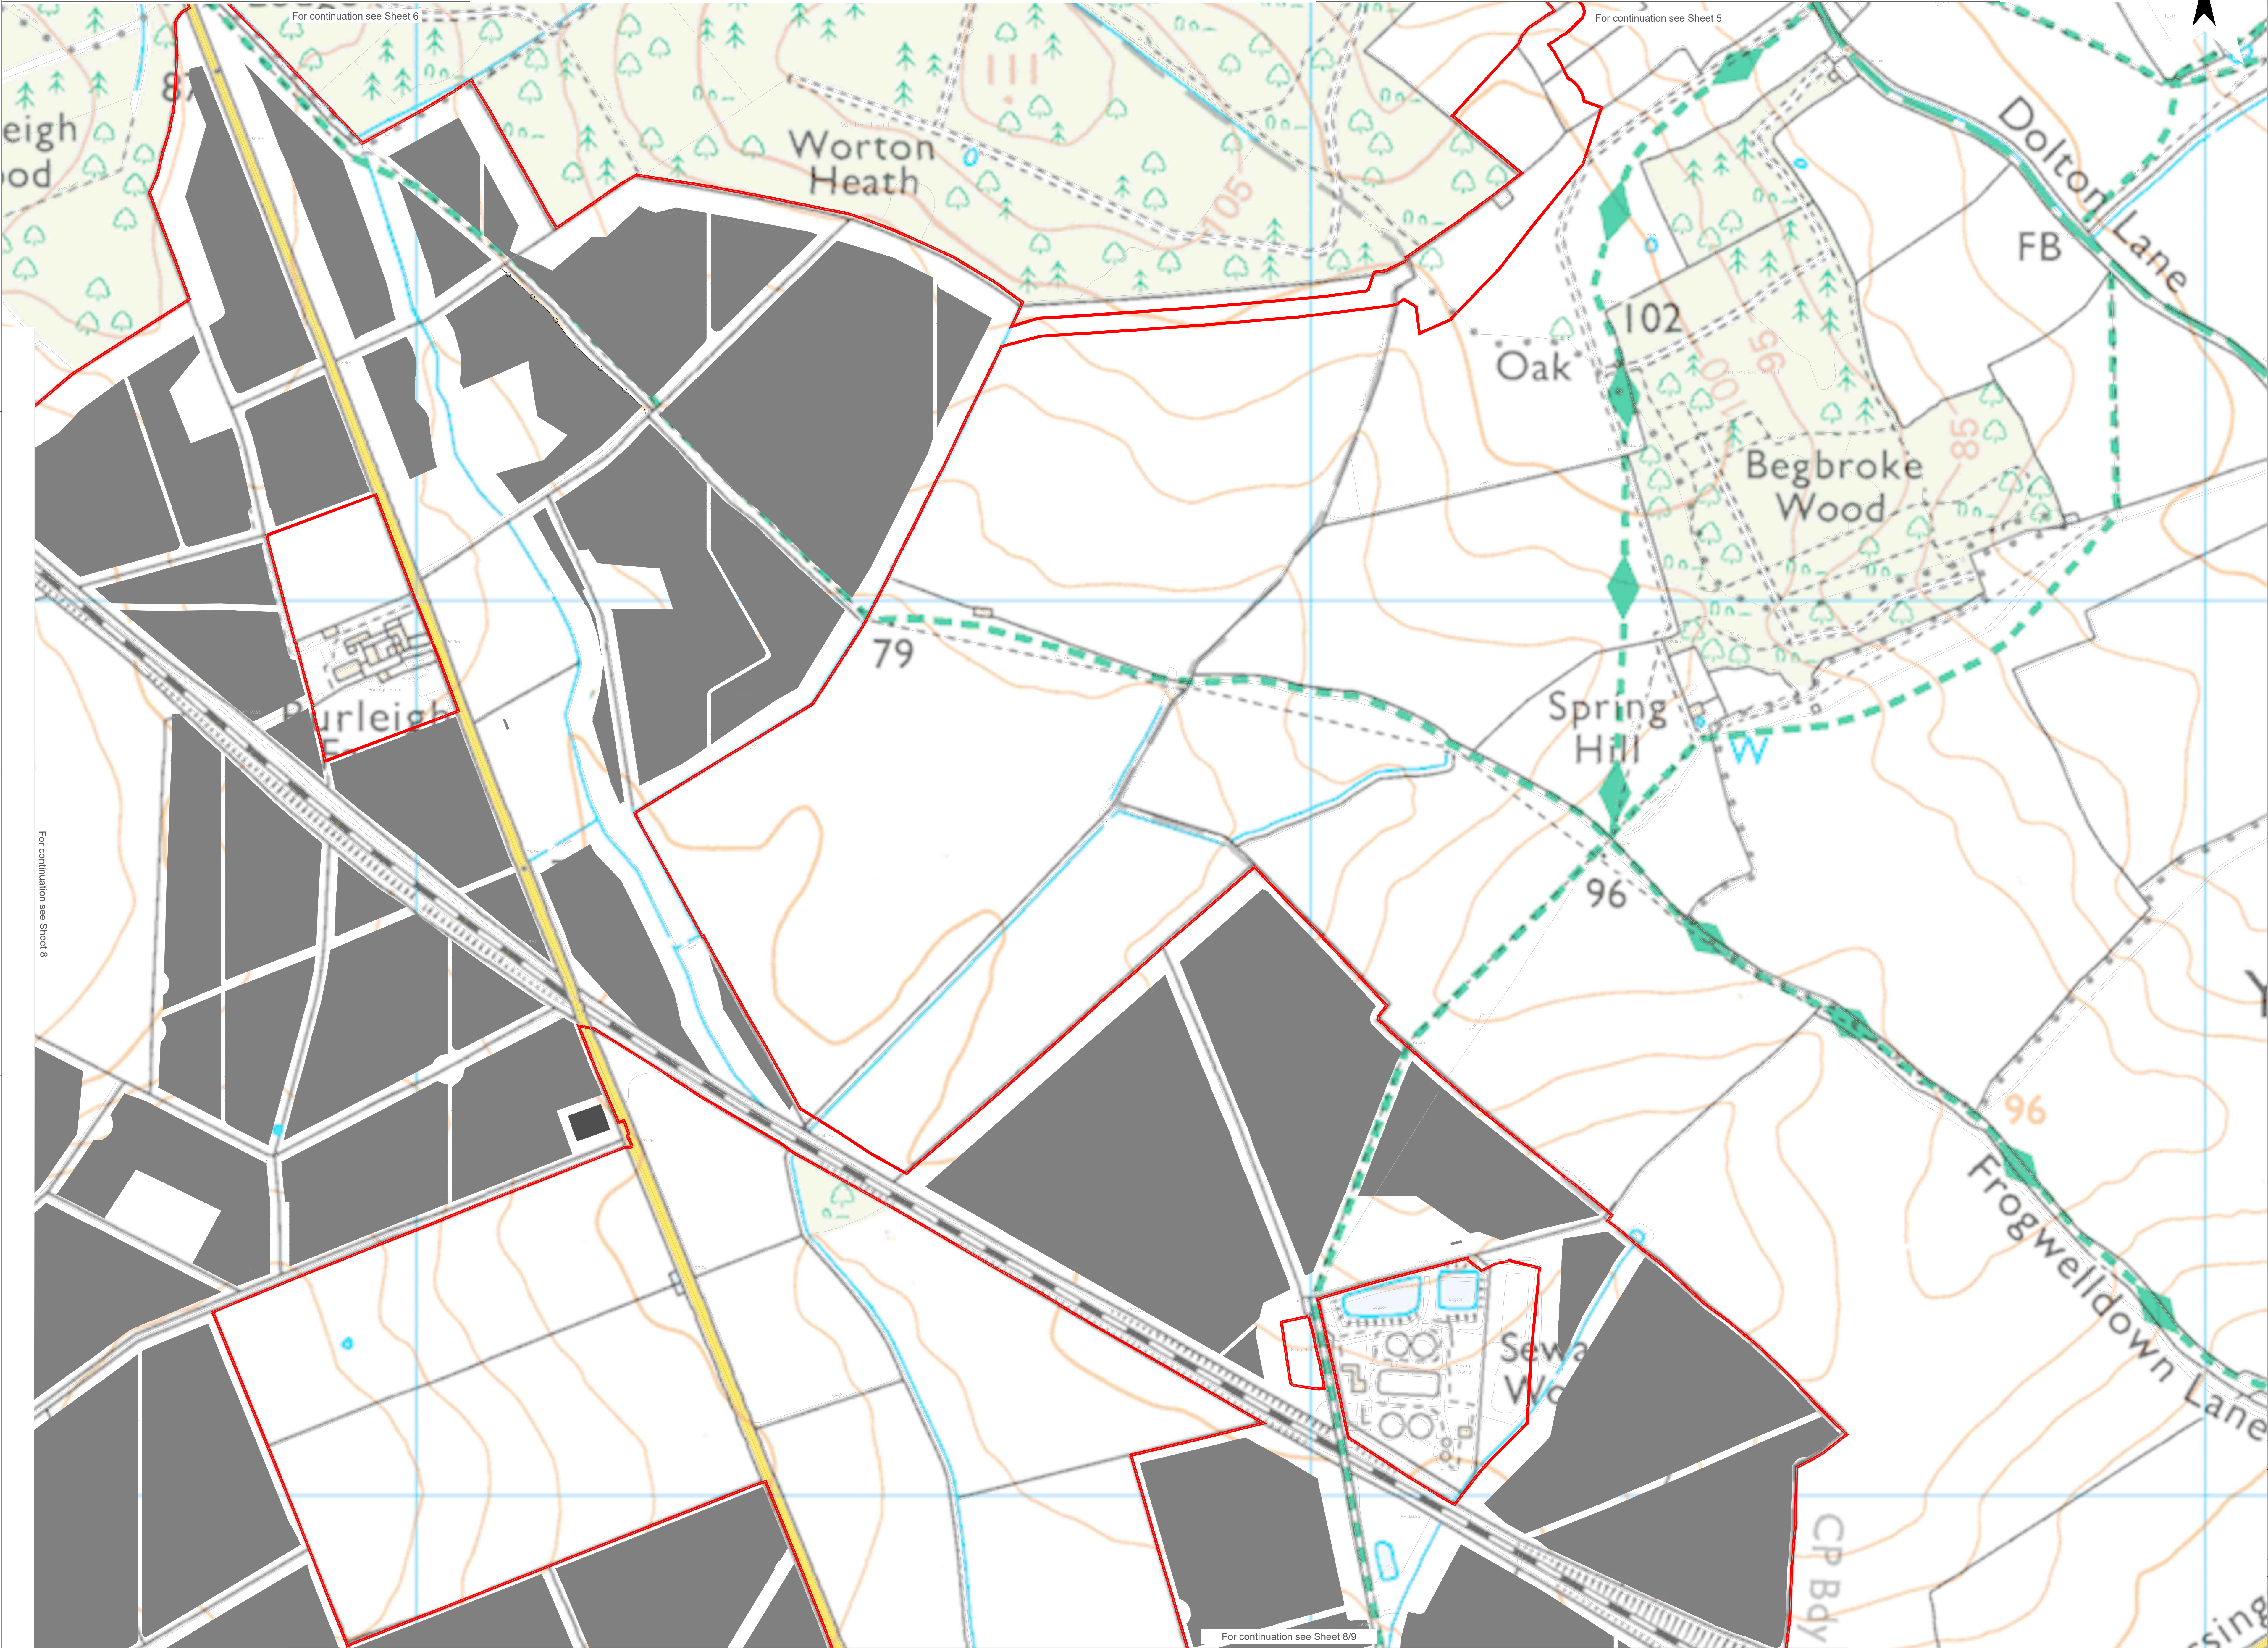

Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Extent of Works No. 3(b) under Requirement 15

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No. EN010147/APP/21.6		
A	Created	16.07.2026	M.Thom			




Scale: 1:2500 at A0

Title
Landscape Parameter Plan
Sheet 7
Central Site Area 3 of 6



Photovoltaik-Entwicklungs-Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

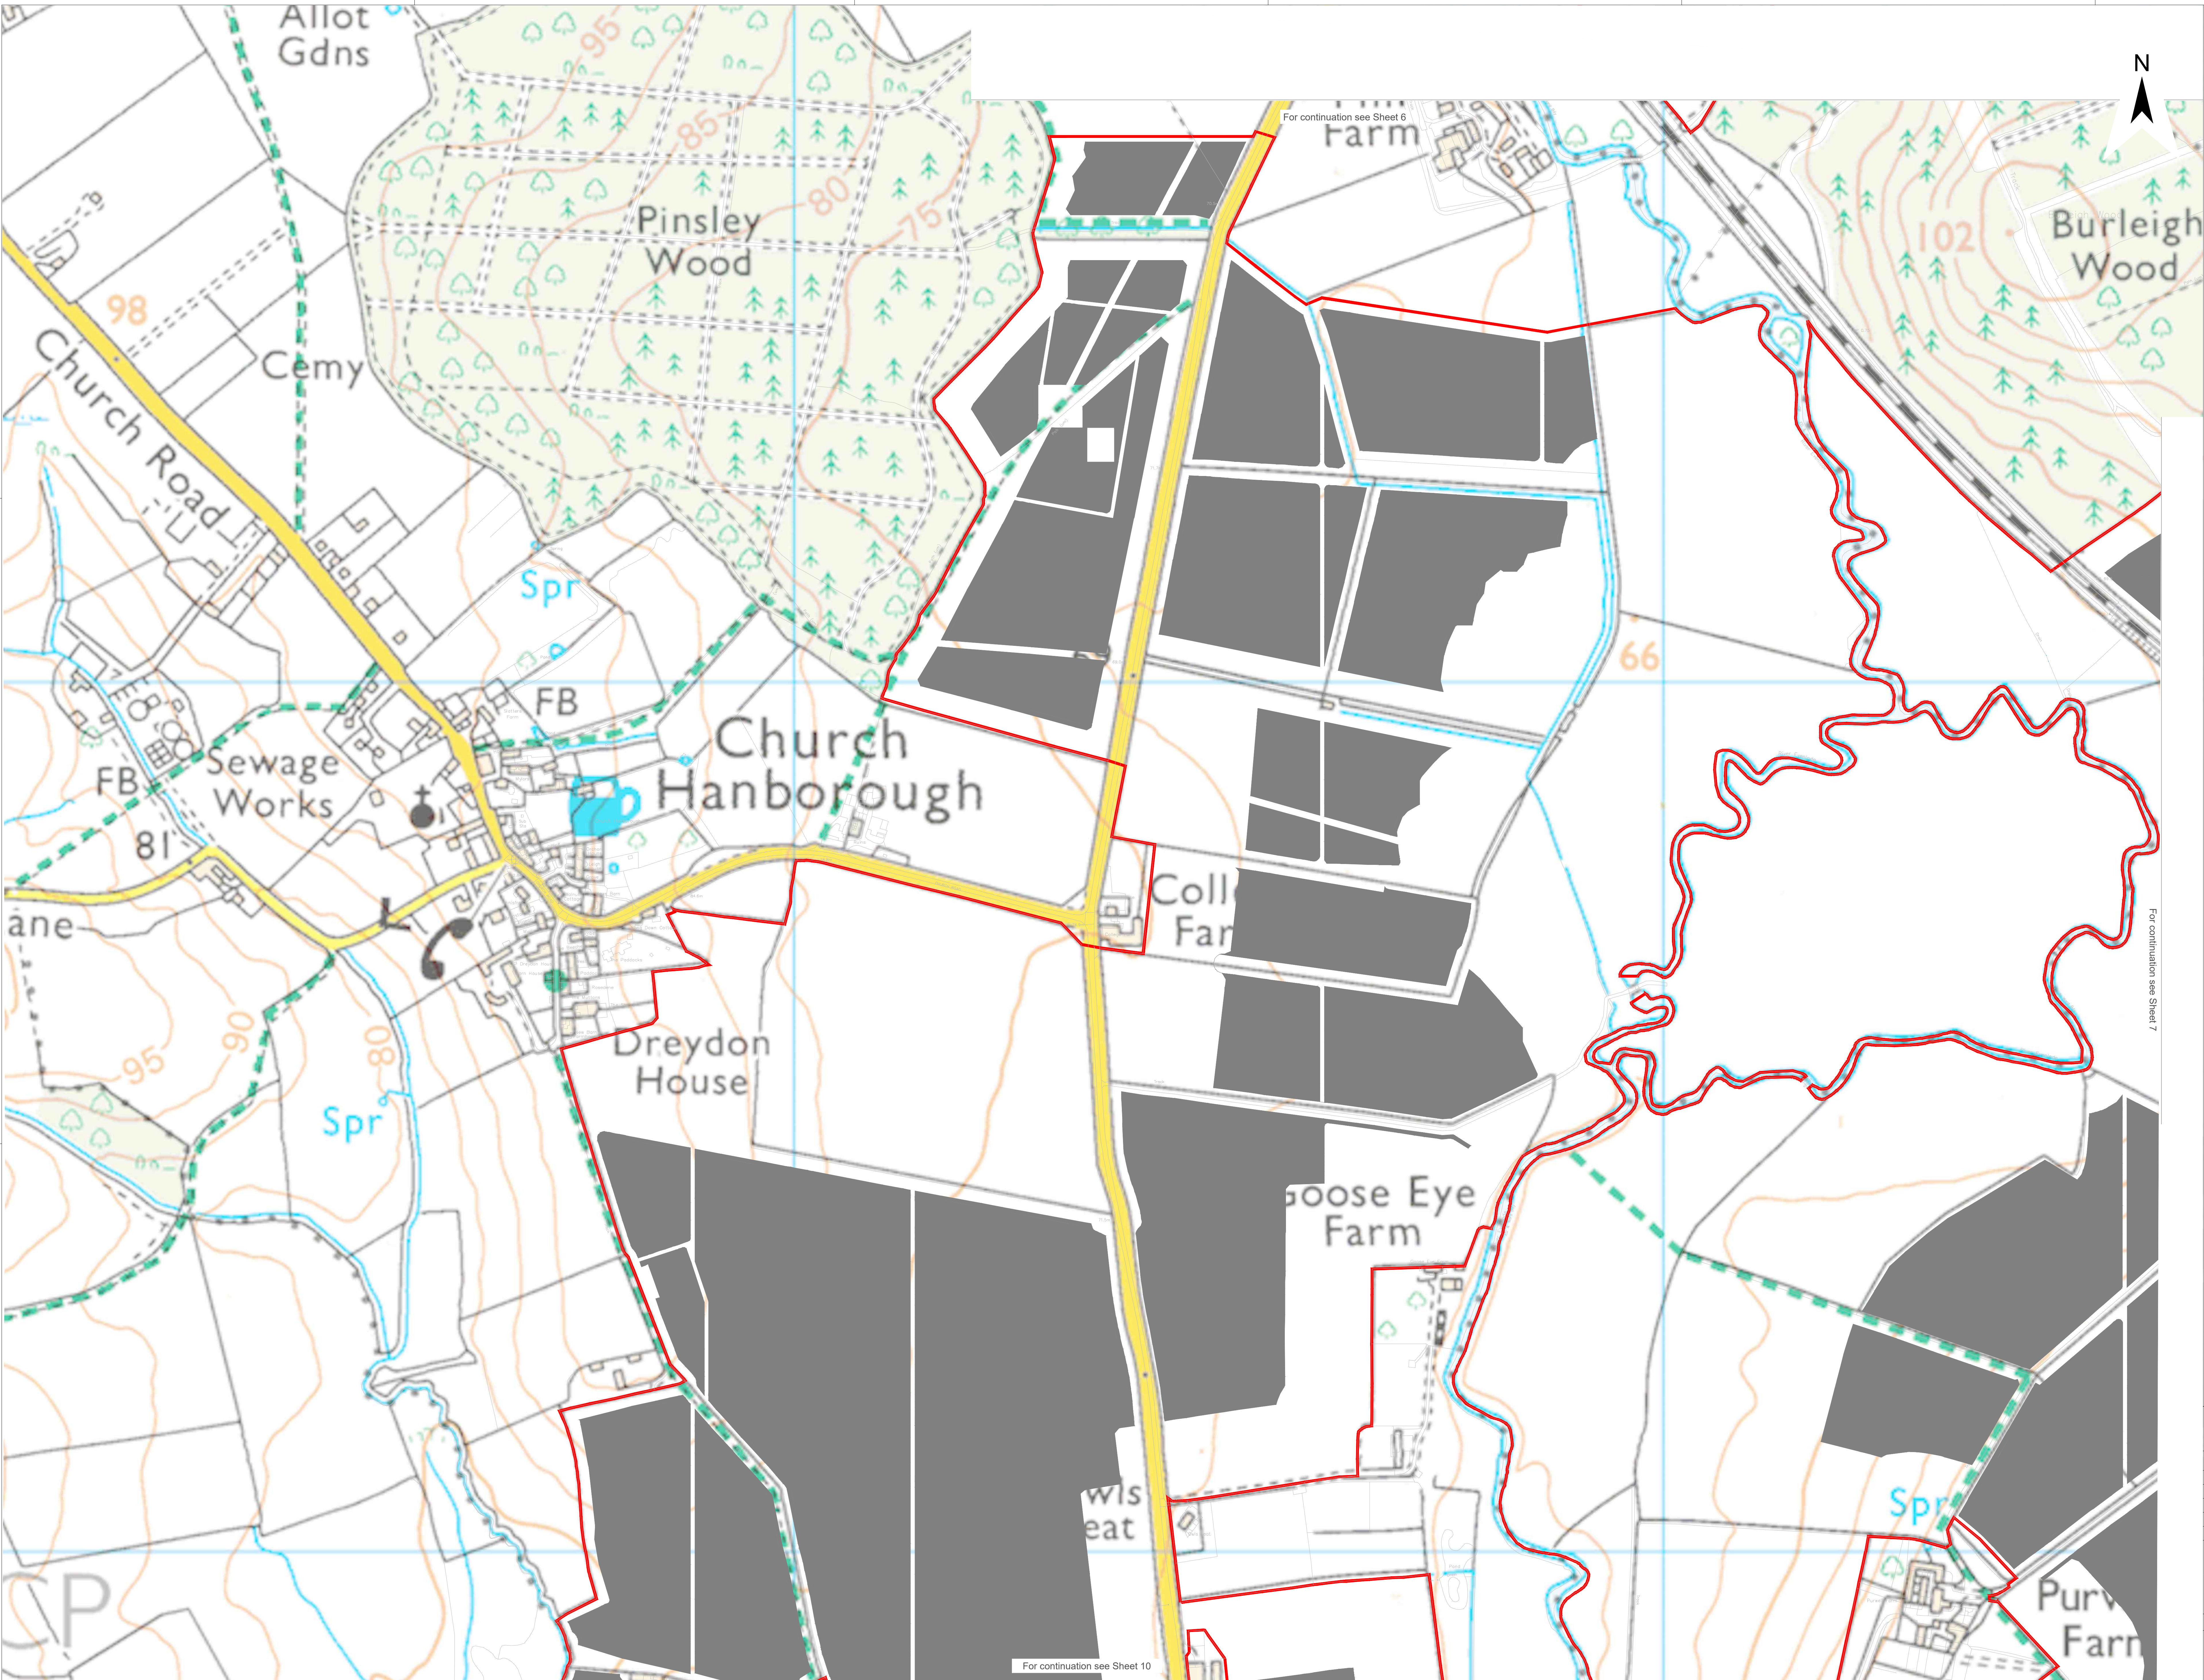


Legend

Site Location and Order Limits 

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15 

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom			




Scale: 1:2500 at A0

Title
Landscape Parameter Plan
Sheet 8
Central Site Area 4 of 6



Photovoltaik-Entwicklungs-Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

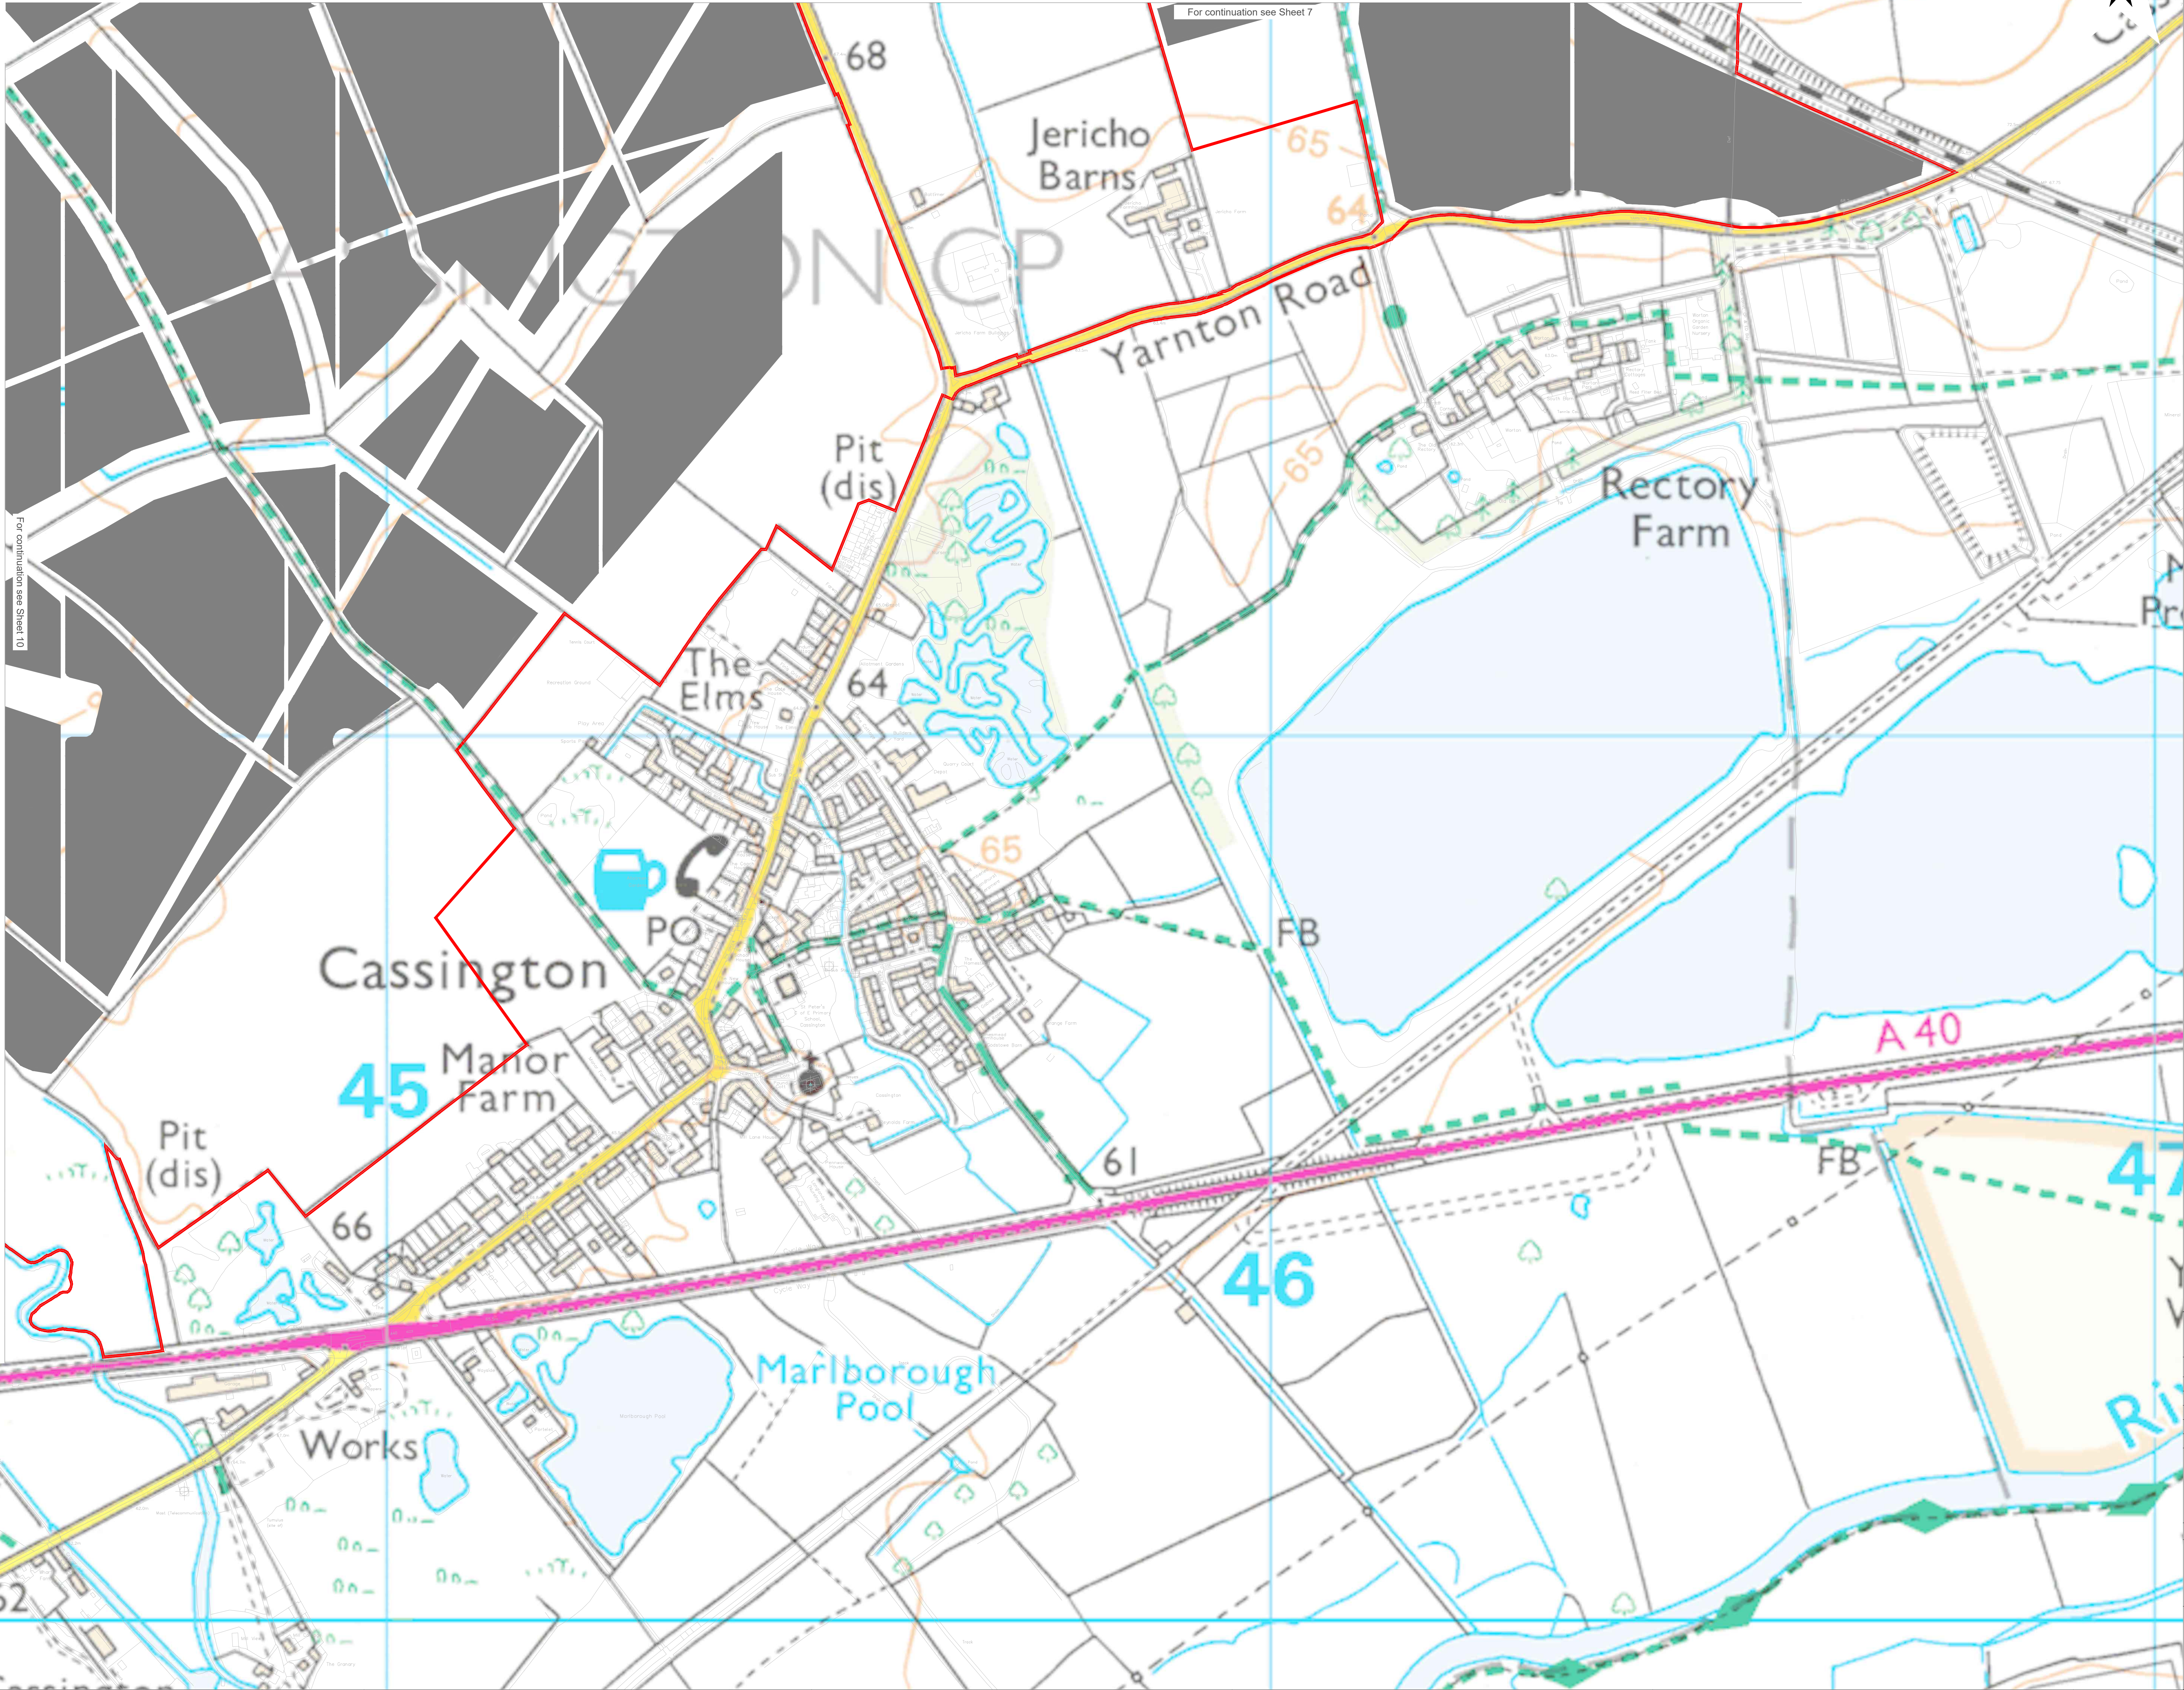

Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

For continuation see Sheet 7

For continuation see Sheet 10

Project: Botley West Solar Farm


Status: Final

Id.	Changes	Date	Name	Date	Name
			Edit	16.07.2026	M.Thom
			Check	16.07.2026	H.Trabelsi
			Drawing No.	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom		

Scale: 1:2500 at A0

Title: Landscape Parameter Plan
Sheet 9
Central Site Area 5 of 6

Photovoltaik Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

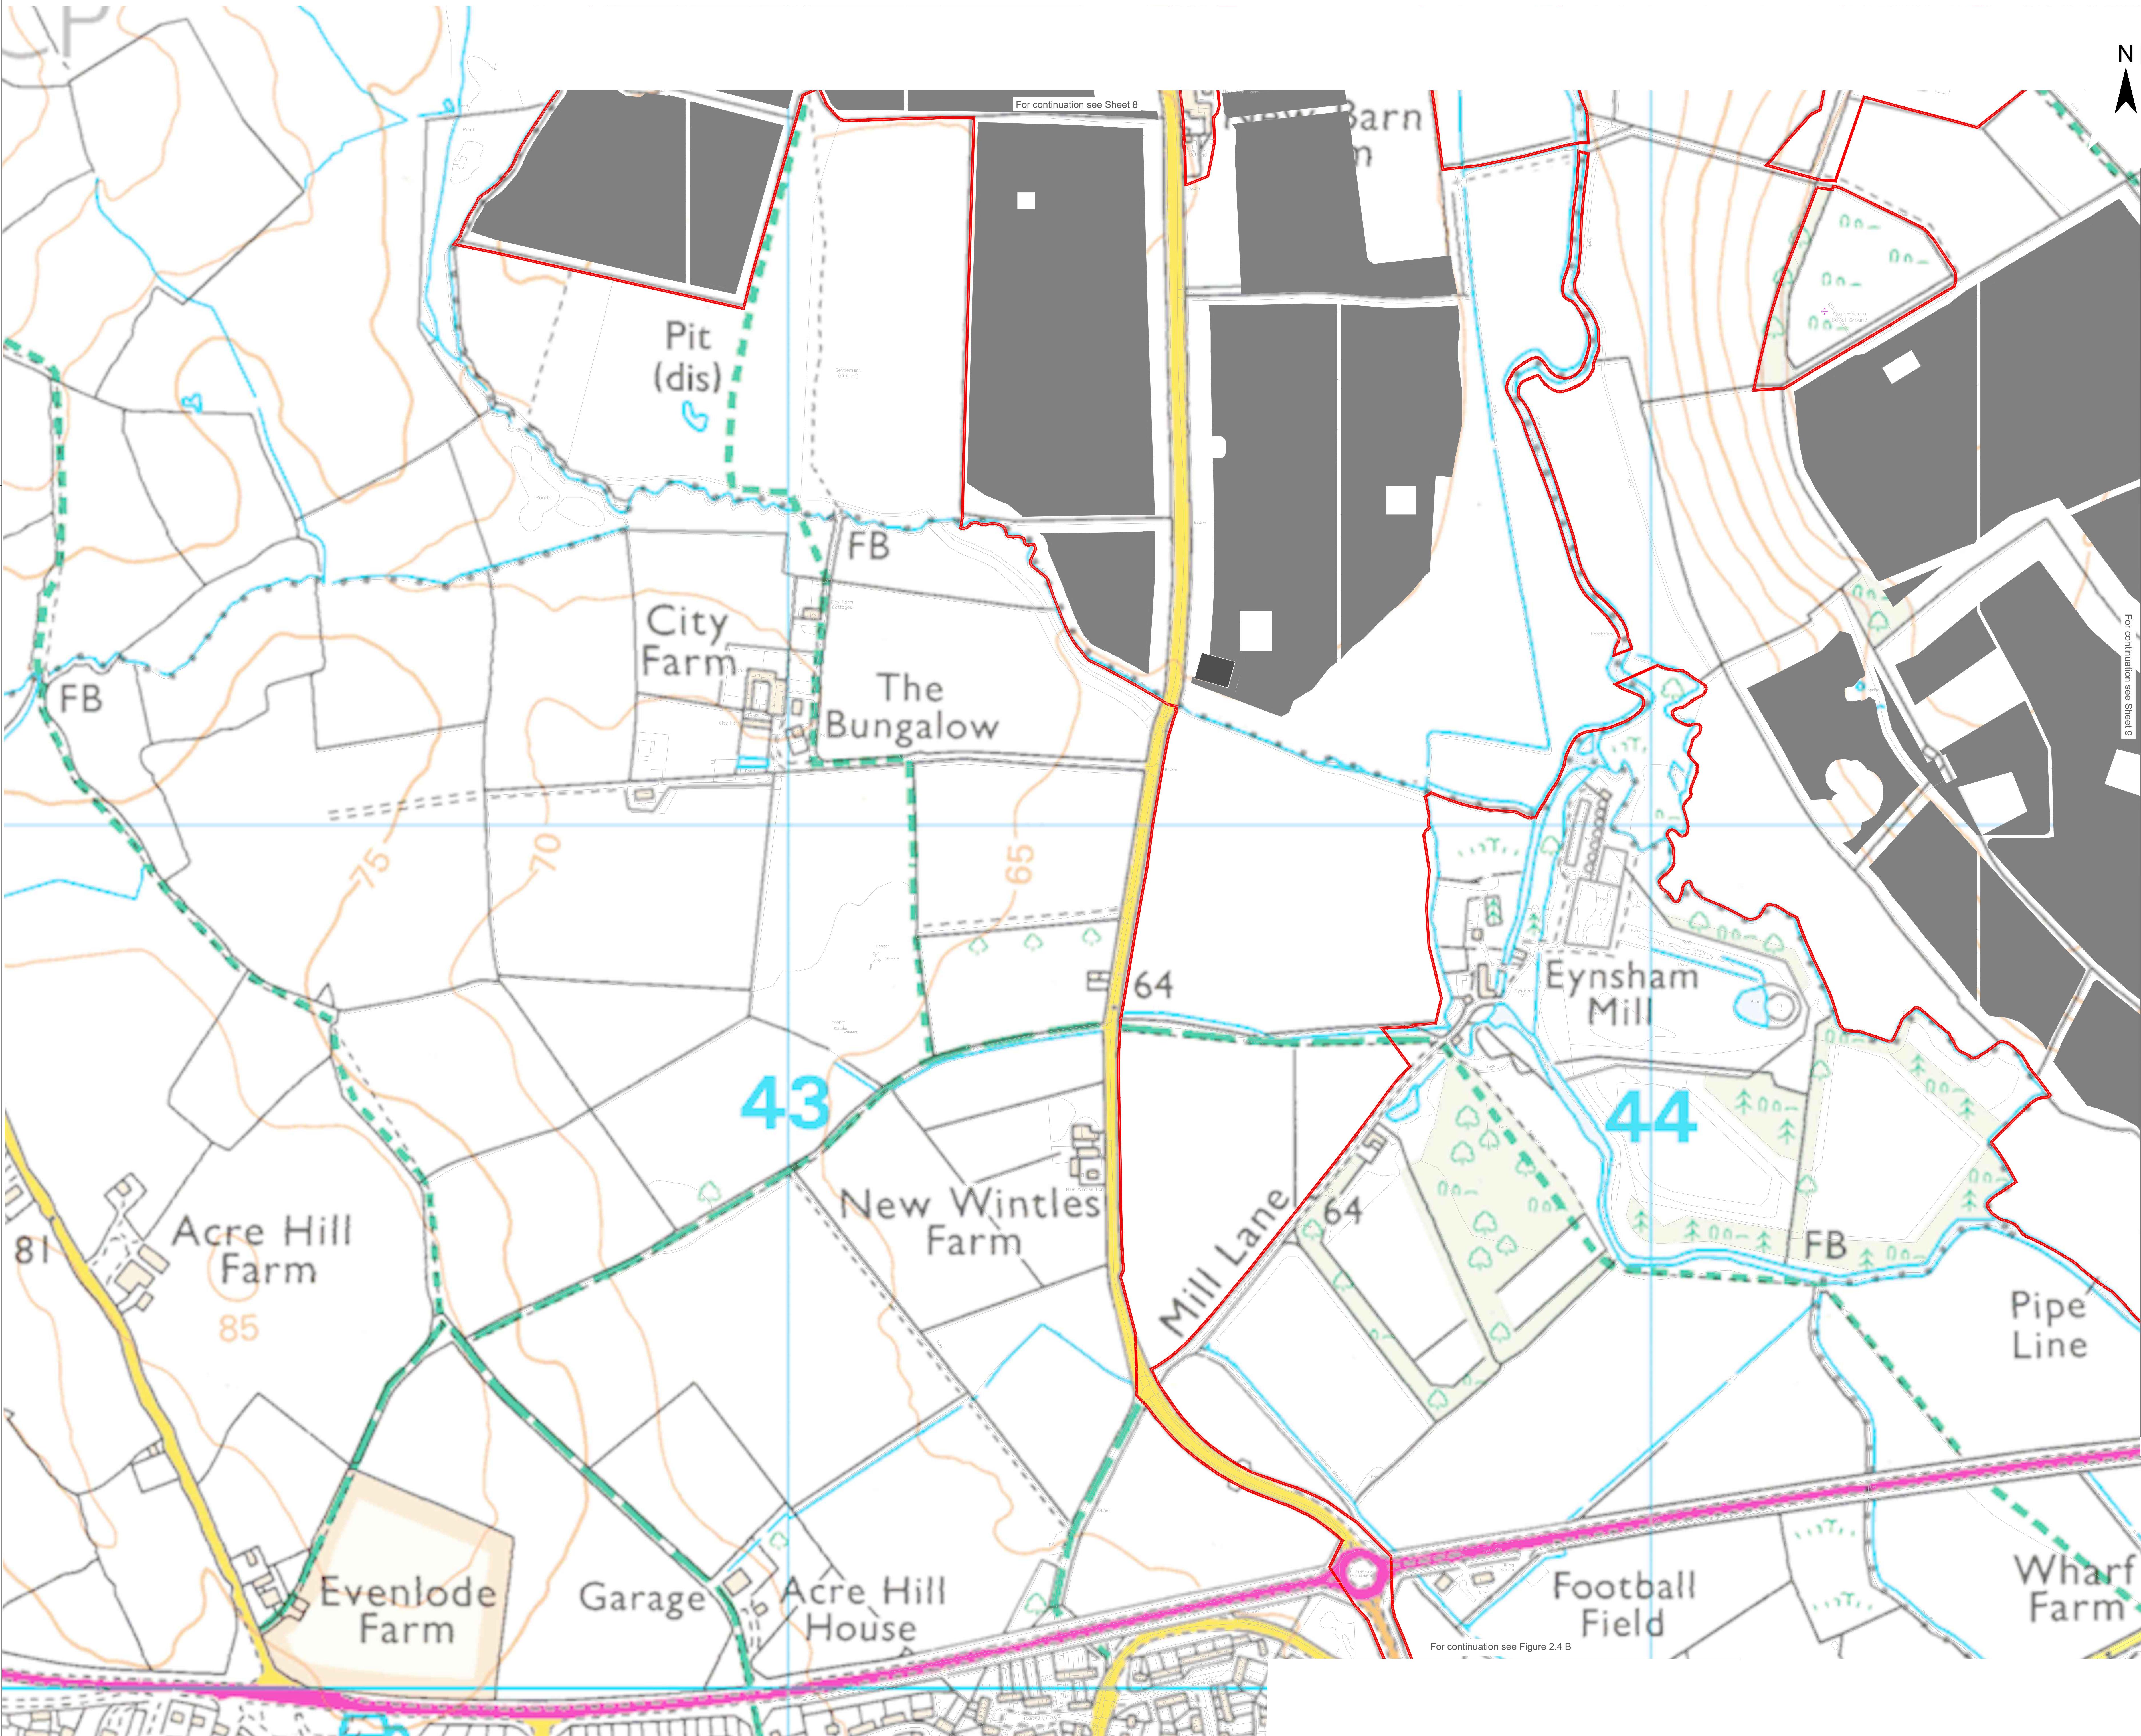


Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Extent of Works No. 3(b) under Requirement 15

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom			

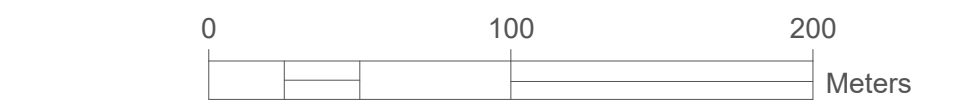


Scale: 1:2500 at A0

Title Landscape Parameter Plan
Sheet 10
Central Site Area 6 of 6



Photovoltaik Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

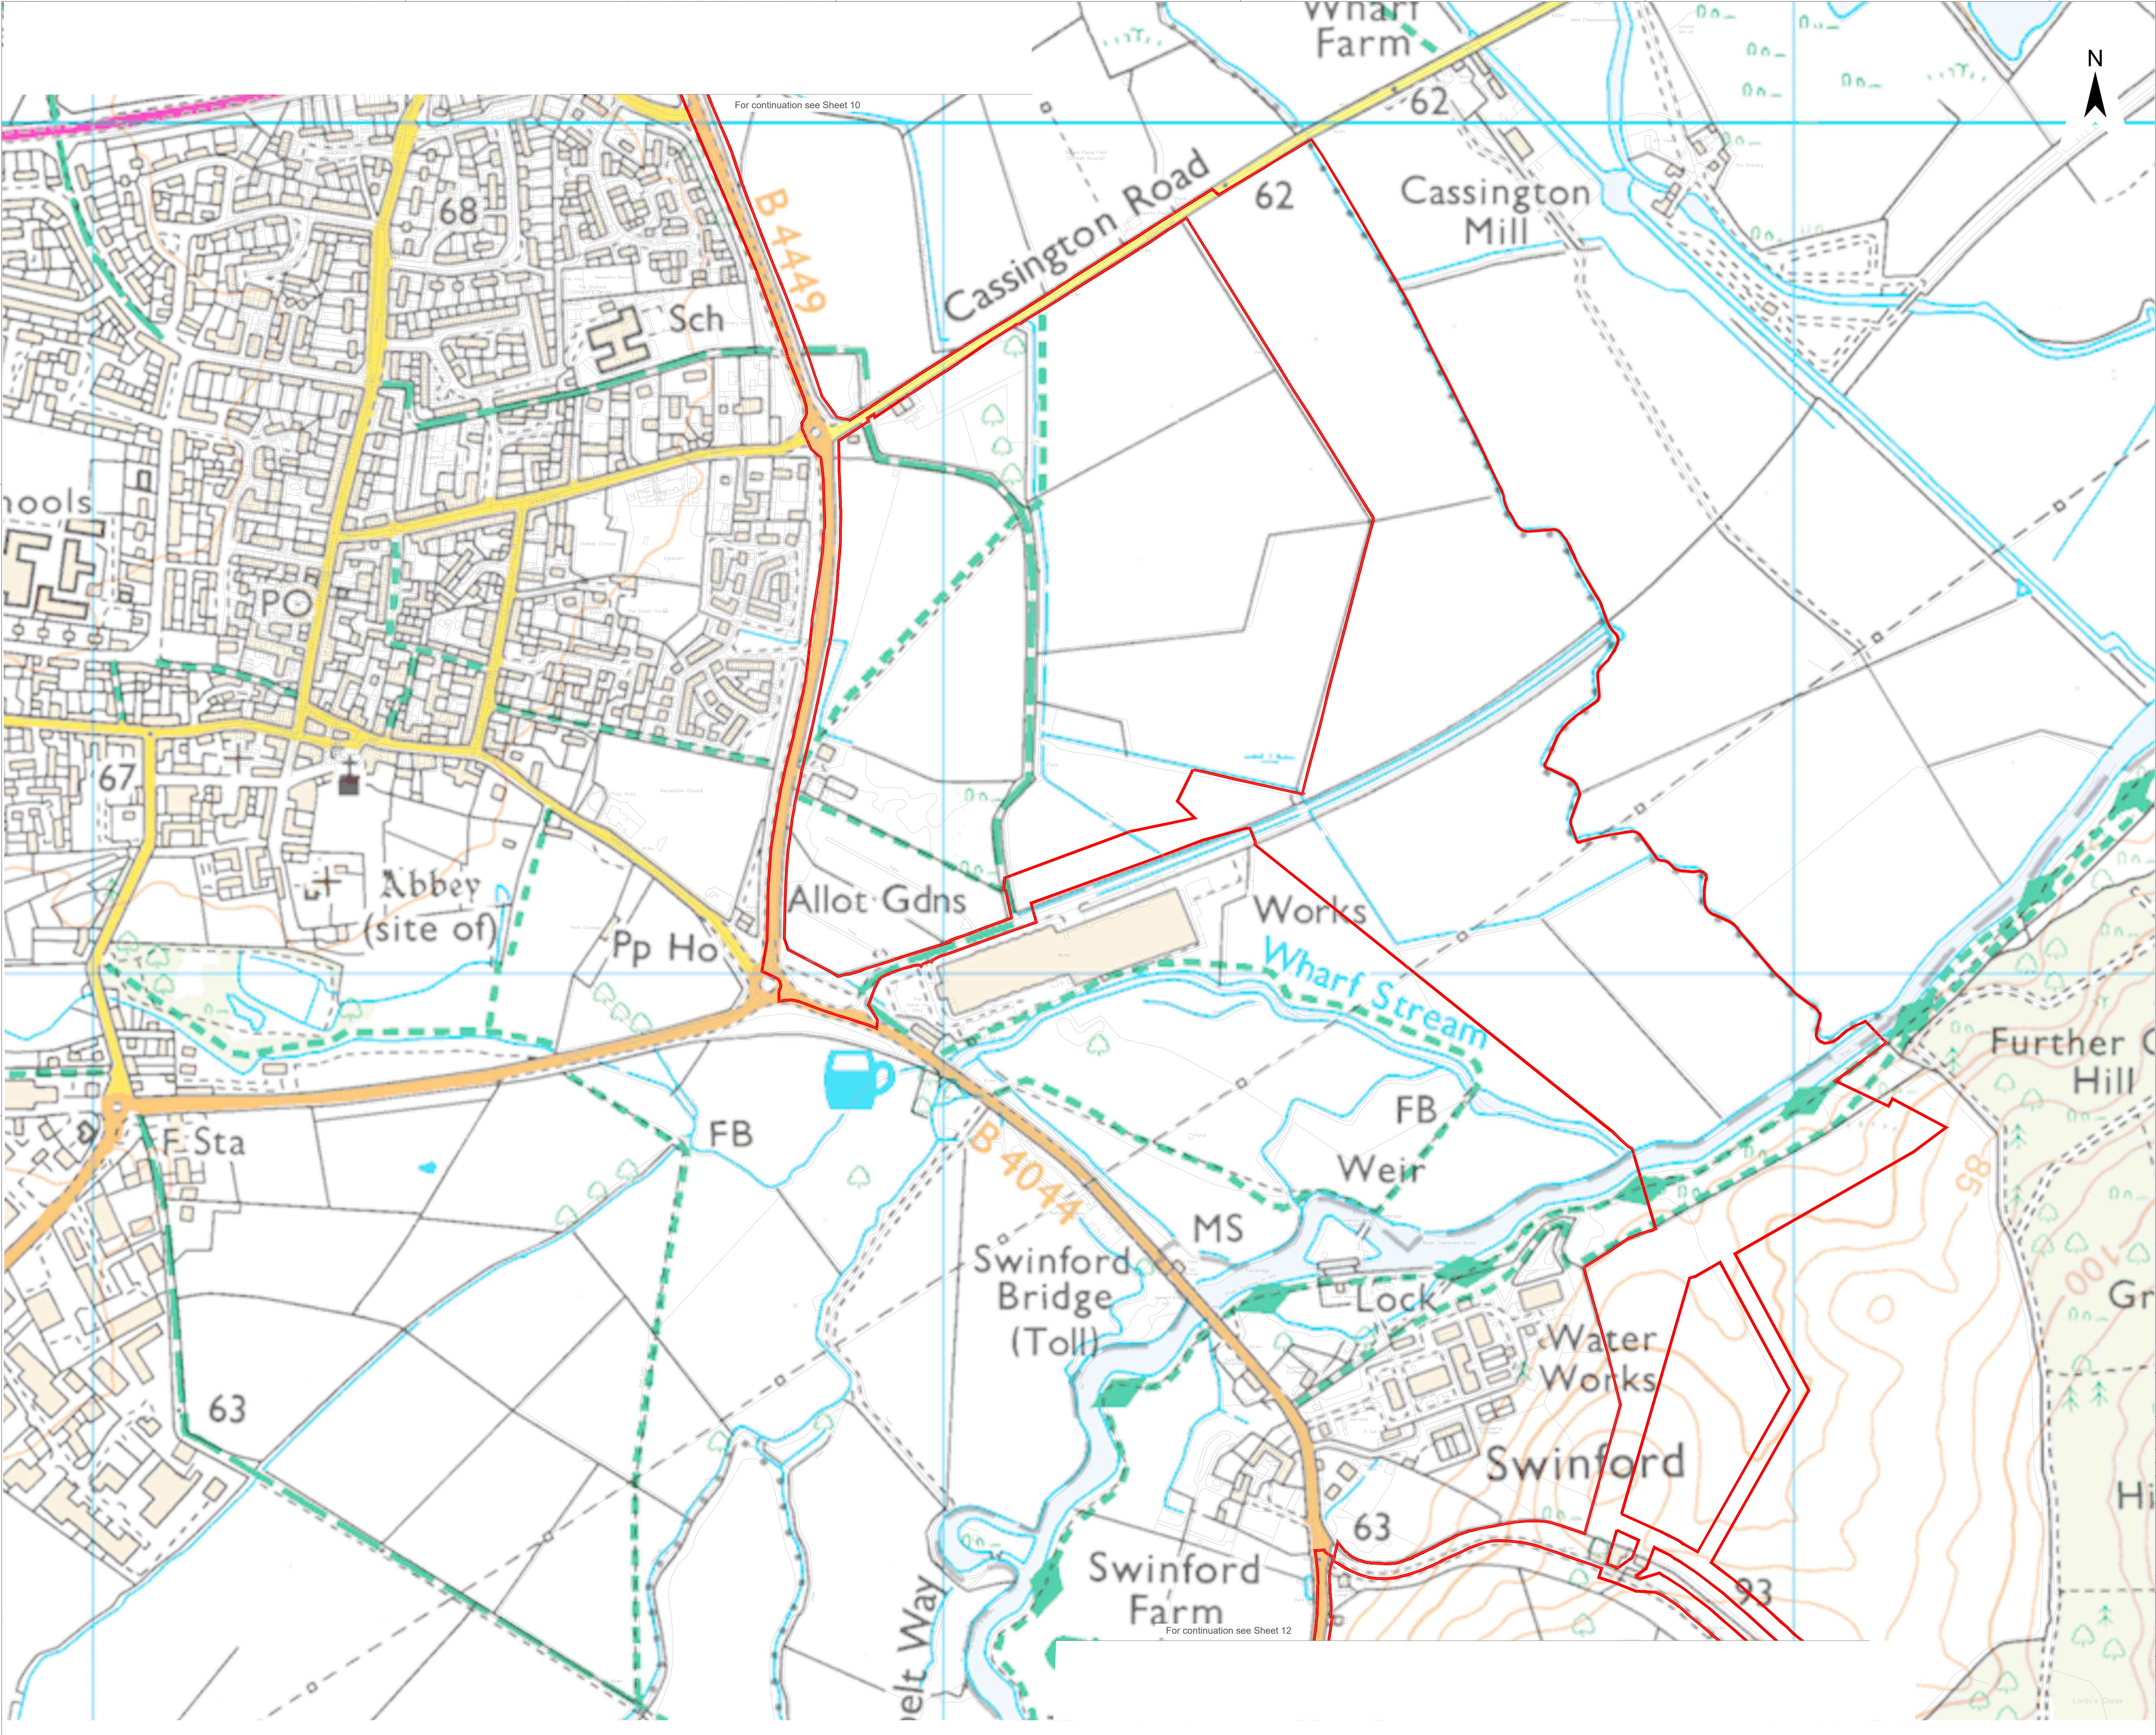

For continuation see Sheet 10

For continuation see Sheet 12




Legend

Site Location and Order Limits



Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
A	Created	16.07.2026	M.Thom	Drawing No	EN010147/APP/21.6	




Scale: 1:2500 at A0

Title
Landscape Parameter Plan
Sheet 11
275kV Illustrative Cable Corridor Plan



Photovoltaik-Entwicklungs-Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

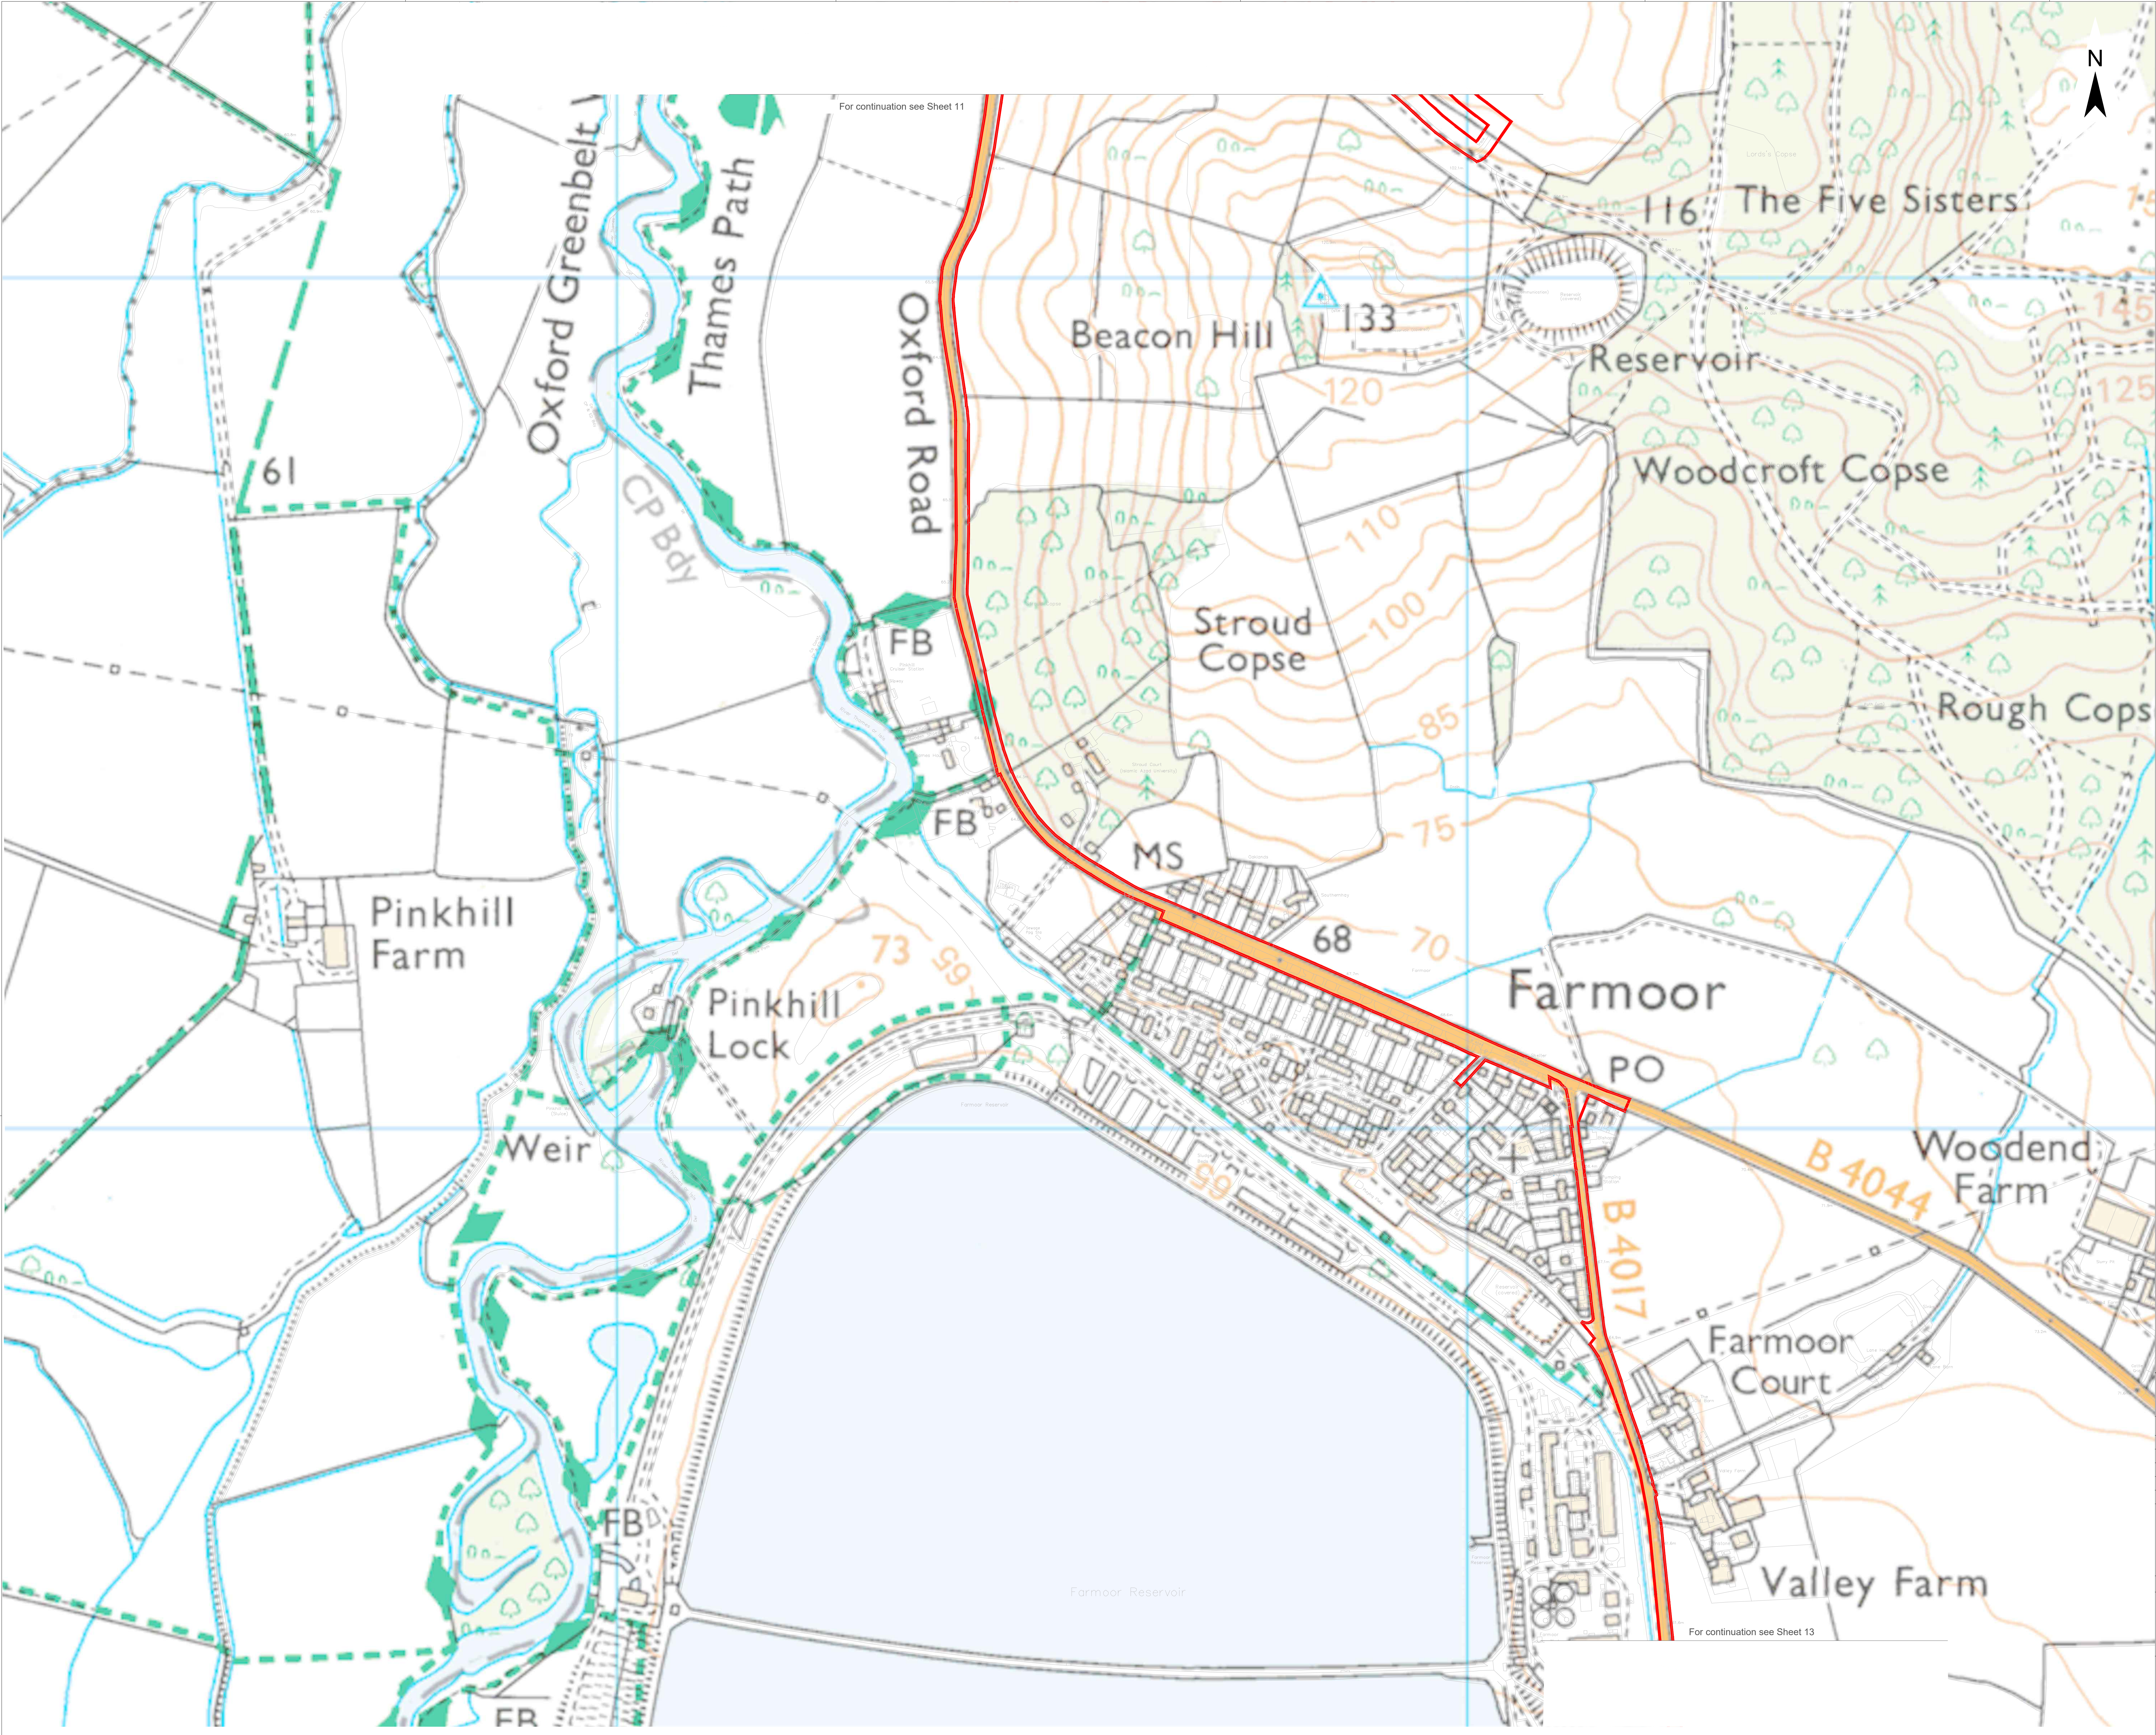

Legend

Site Location and Order Limits

Project			Status		
Botley West Solar Farm			Final		
Id.	Changes	Date	Name	Date	Name
			Edit	16.07.2026	M.Thom
			Check	16.07.2026	H.Trabelsi
			Drawing No. EN010147/APP/21.6		
A	Created	16.07.2026	M.Thom		

0100200

Meters

Scale: 1:2500 at A0

Title


Landscape Parameter Plan

Sheet 12

275kV Illustrative Cable Corridor Plan

PHOTOVOLTAIC DEVELOPMENT PARTNERS

Photovoltaic Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany

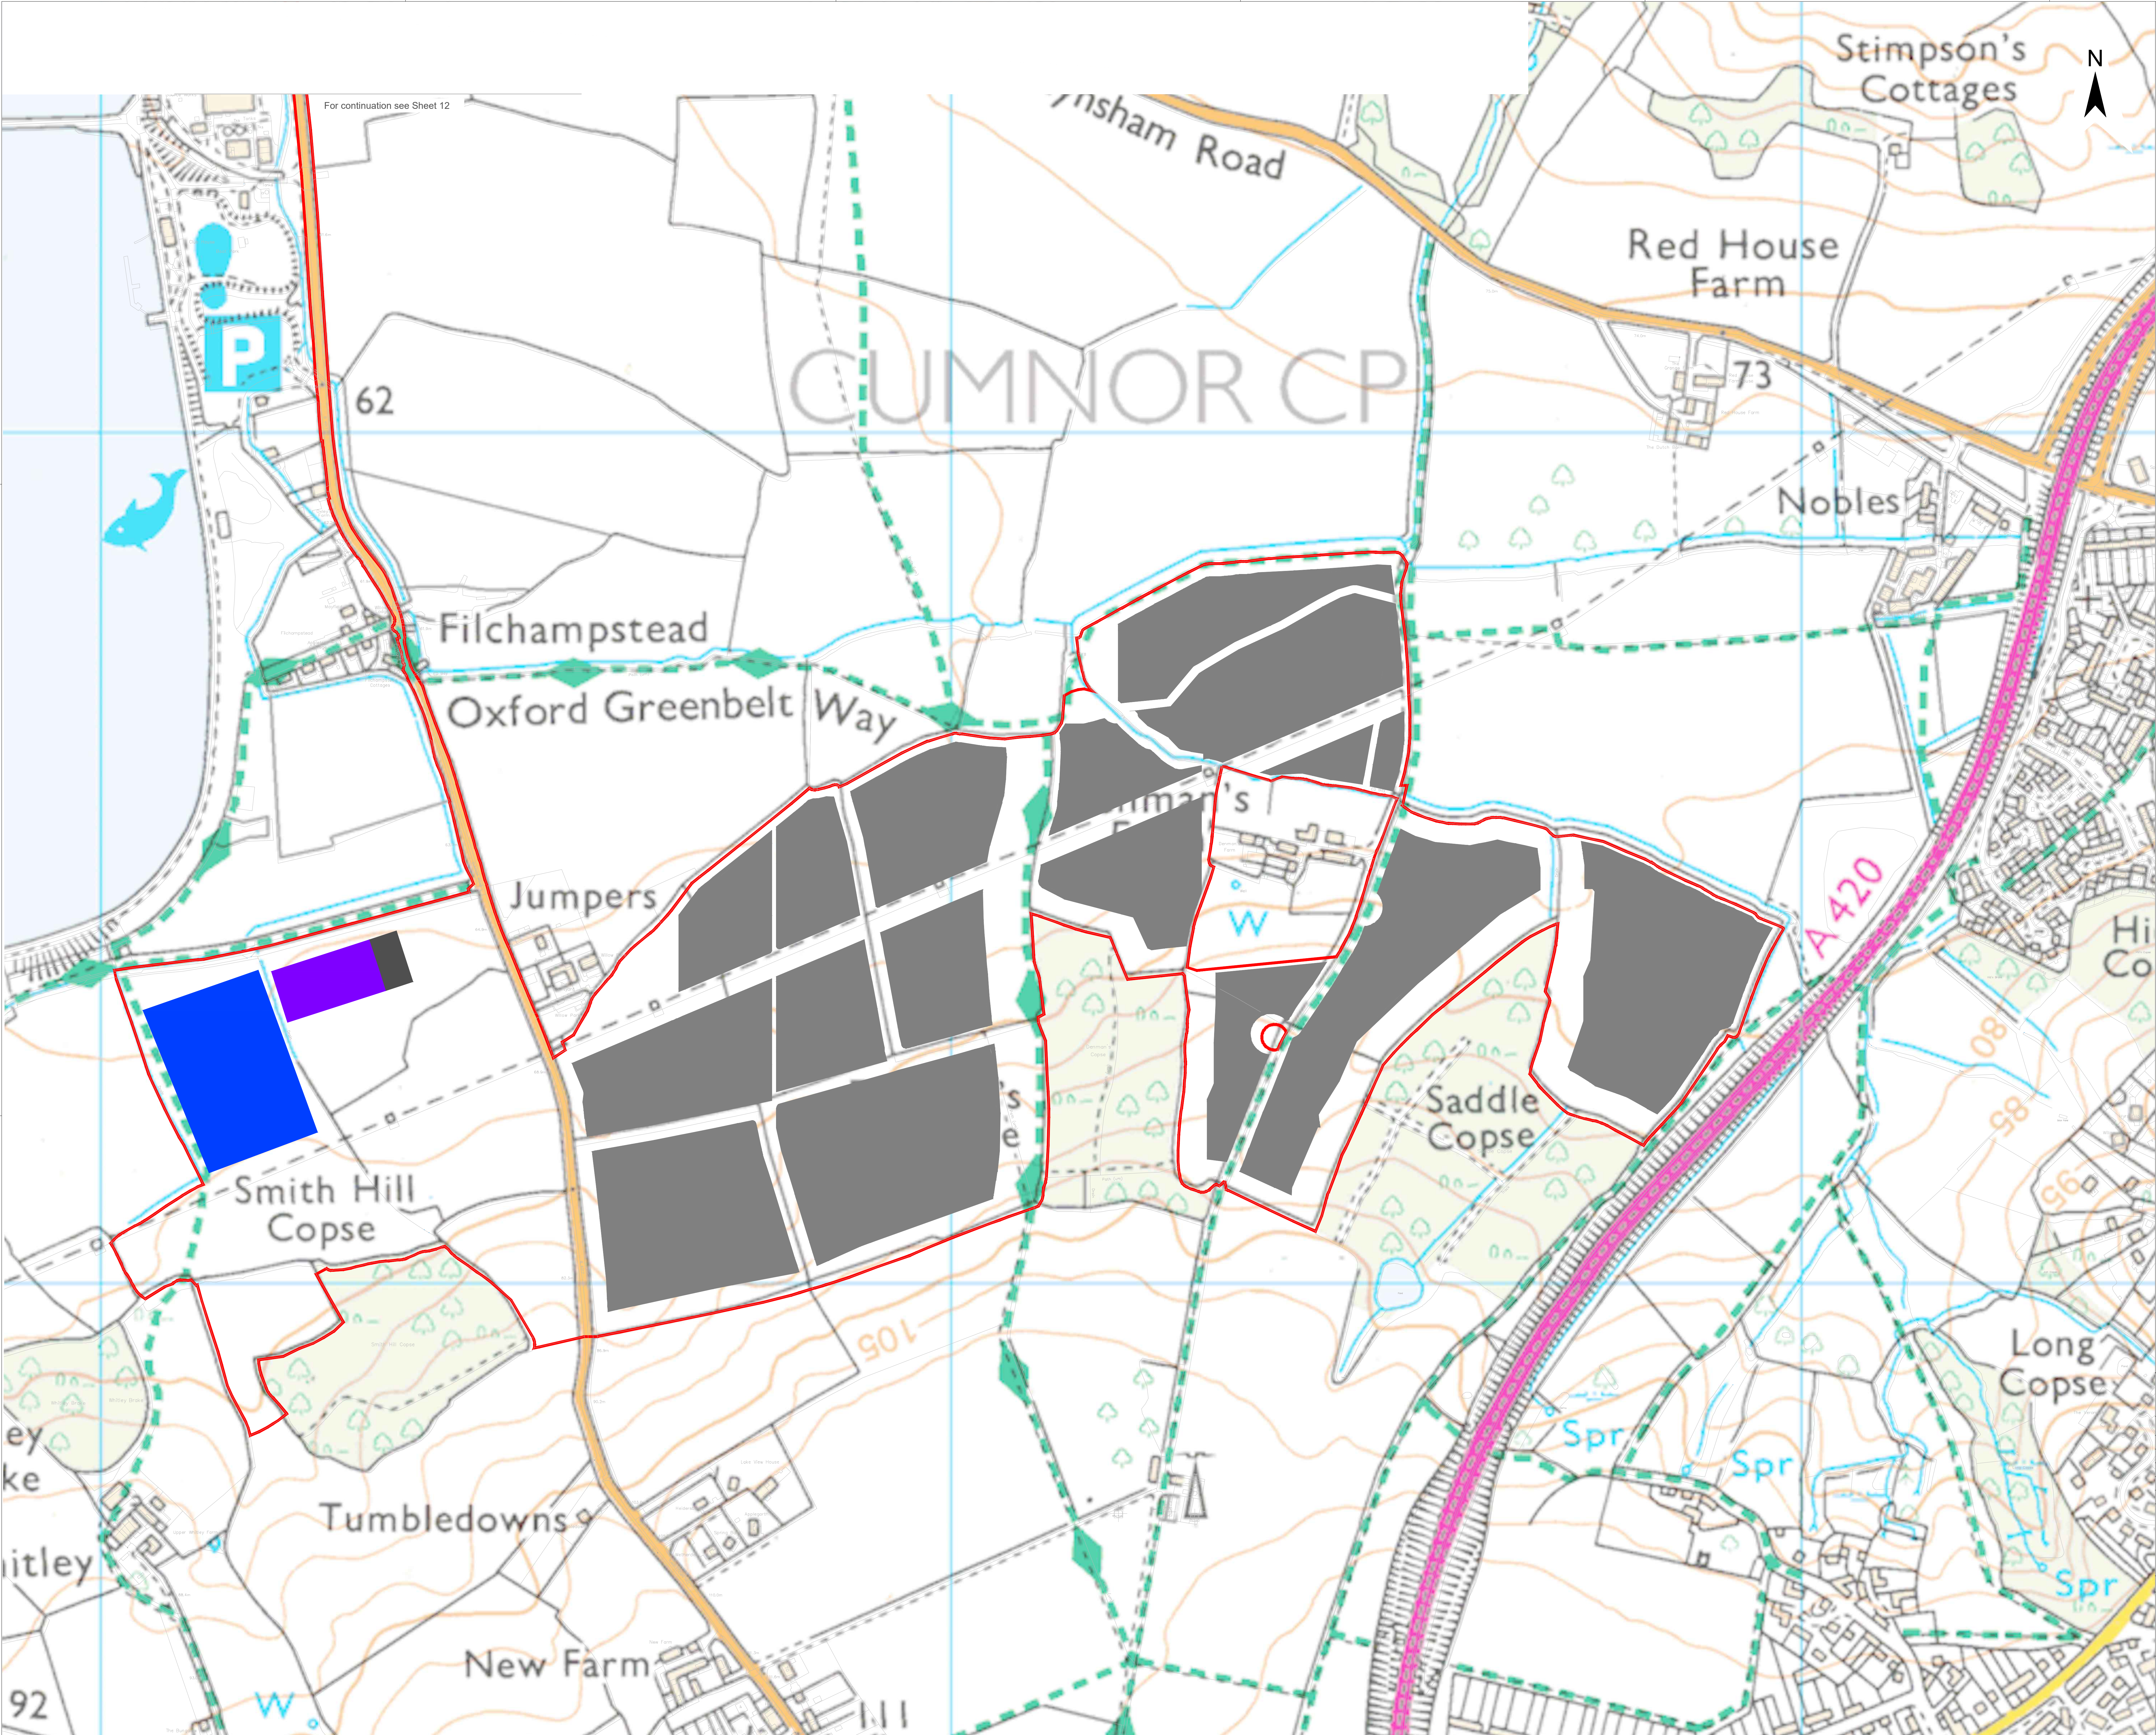

For continuation see Sheet 12

Legend

Site Location and Order Limits 


Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15 

Extent of Works No. 3(b) under Requirement 15 

Extent of Works No. 3(a) under Requirement 15 

Extent of Works No. 2 under Requirement 15 

Project				Status		
Botley West Solar Farm				Final		
Id.	Changes	Date	Name		Date	Name
				Edit	16.07.2026	M.Thom
				Check	16.07.2026	H.Trabelsi
				Drawing No	EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom			




Scale: 1:2500 at A0

Title

Landscape Parameter Plan

Sheet 13A

Southern Site Area 1 of 1

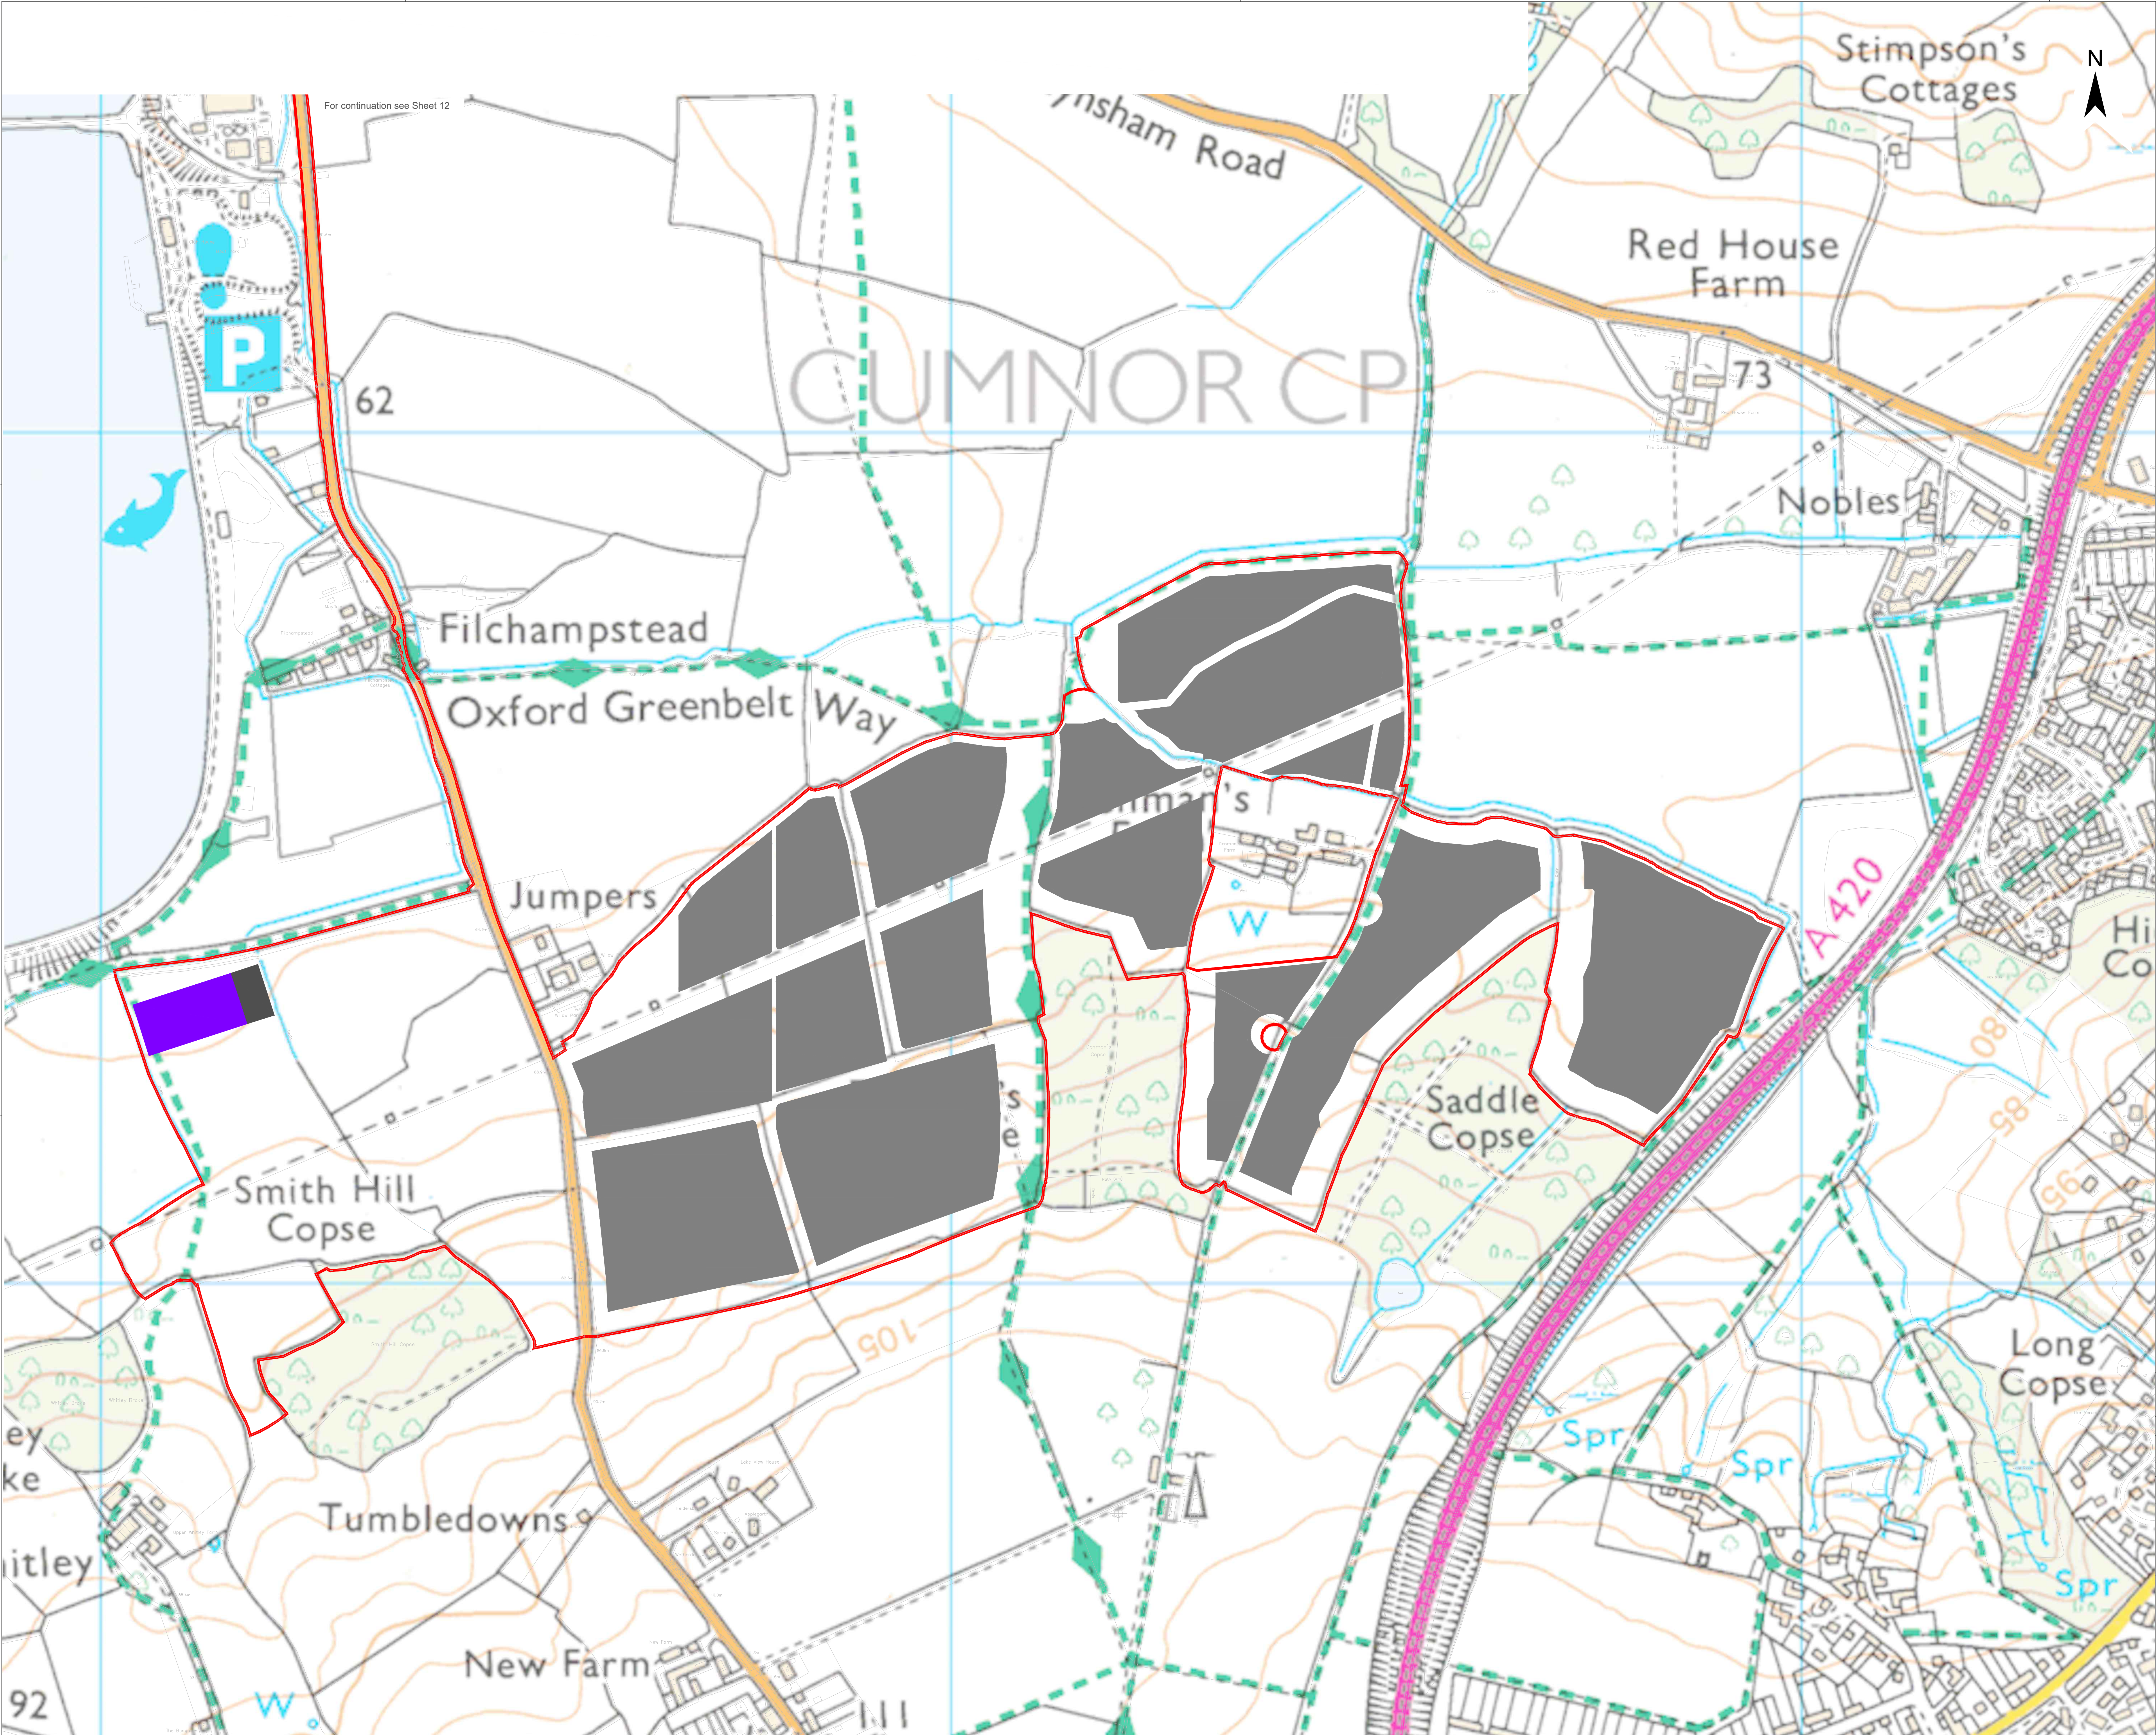

For continuation see Sheet 12

Legend

Site Location and Order Limits

Extent of Works No. 1, Work No. 5(d), Works No. 6(c), Works No. 6(d), and Works No. 8(g) under Requirement 15

Extent of Works No. 3(b) under Requirement 15

Extent of Works No. 3(a) under Requirement 15

Project		Status	
Botley West Solar Farm		Final	
Id.	Changes	Date	Name
	Edit	16.07.2026	M.Thom
	Check	16.07.2026	H.Trabelsi
		Drawing No. EN010147/APP/21.6	
A	Created	16.07.2026	M.Thom

0 100 200 Meters

Scale: 1:2500 at A0

Title

Landscape Parameter Plan

Sheet 13B

Southern Site Area 1 of 1

Photovolt Development Partners GmbH
Kurfürstendamm 52
10707 Berlin, Germany



Delivery | Design | Engagement | Heritage | Impact Management | Planning
Sustainable Development | Townscape | Transport

Edinburgh: 11 Alva Street | Edinburgh | EH2 4PH

Glasgow: 177 West George Street | Glasgow | G2 2LB

London: Da Vinci House | 44 Saffron Hill | London | EC1N 8FH

Manchester: This is The Space | 68 Quay Street | Manchester | M3 3EJ

Birmingham: The Colmore Building | 20 Colmore Circus Queensway | Birmingham | B4 6AT

www.iceniprojects.com |  [iceni-projects](#) |  [iceniprojects](#) |  [iceniprojects](#)